WSQ COURSE SLIDES

Google Workspace for SMEs

Boosting Efficiency and Collaboration



TGS-2023018988 · Version 7.0 · 13 September 2026

Tertiary Infotech Academy Pte Ltd · UEN201200696W · Trainer: Dr Alfred Ang

AI-generated SME scenario photograph; instructional diagrams and charts are editable.

© Tertiary Infotech Academy Pte Ltd

COURSE ADMINISTRATION

Digital Attendance Mandatory

1

TRAQOM · SSG

Complete the class digital attendance process shown by your trainer.

2

Class sessions

Record attendance for each required training session.

3

Assessment attendance

Record assessment attendance before commencing WA and PP.

4

Training portal

Use the current class link and QR supplied through the LMS.

© Tertiary Infotech Academy Pte Ltd

About the Trainer



General Trainer

Complete before delivery

NAME

DESIGNATION

QUALIFICATIONS

EXPERTISE

EXPERIENCE

CONTACT

© Tertiary Infotech Academy Pte Ltd

NAMED TRAINER

About the Trainer



Dr Alfred Ang

Course trainer

ROLE
Trainer, Tertiary Infotech Academy

DELIVERS
Google Workspace content management and collaboration

CLASS CONTEXT
Confirm current class profile and account access

CONTACT
enquiry@tertiaryinfotech.com

© Tertiary Infotech Academy Pte Ltd

Learner Introduction

1

Current role

Share one content asset you maintain and its current audience.

2

Organisation challenge

Name one access, version or customer-navigation fault.

3

Tools access

Confirm training Google Account and browser.

4

Practice boundary

Use supplied synthetic records and named training identities.

© Tertiary Infotech Academy Pte Ltd

Ground Rules

1

Privacy

Use mock data; no real customer records or live credentials.

2

Collaboration

Respect named access and explain review decisions.

3

Change control

Practise in new training folders; no production tenant changes.

4

Evidence

Capture exact outputs and verify with intended viewer identity.

© Tertiary Infotech Academy Pte Ltd

COURSE ALIGNMENT

Learning Outcomes

Outcome	Observable capability	Evidence
LO1	Implement content management policies and post and update content using Google Drive.	Policy and controlled Drive release
LO2	Maintain web properties and assets, create and curate content, and maintain awareness of market offerings.	Maintained site and offering comparison
LO3	Report performance metrics, recommend appropriate add-ons, and generate ideas to improve customer and visitor experience.	Monthly metrics and add-on recommendation

© Tertiary Infotech Academy Pte Ltd

Skills Framework Coverage

Learning block	Knowledge	Abilities
Drive governance	K1, K2, K5	A1, A2
Content and web assets	K3, K4, K8	A3, A4
Metrics and improvement	K6, K7, K9	A5, A6, A7

© Tertiary Infotech Academy Pte Ltd

2DAYS ·16H INCLUDING ASSESSMENT

Lesson Plan Day 1

Time	Session	Training minutes
09:00–09:30	Administration and baseline checks	30
09:30–12:00	Drive governance activities 1–5 + demos	150
12:00–12:30	Docs review activity 6	30
12:30–13:00	Lunch	—
13:00–15:00	Docs/Sheets activities 7–10 + demos	120
15:00–15:30	Break and independent reset	—
15:30–18:00	Slides/Forms/Gmail activities 11–15 + review	150

© Tertiary Infotech Academy Pte Ltd

13.5H TRAINING ·2.5H ASSESSMENT

Lesson Plan Day 2

Time	Session	Training minutes
09:00–10:30	Calendar/Meet/Chat activities 16–18 + demos	90
10:30–10:45	Break	—
10:45–12:15	Sites activities 19–20 and comparison 21	90
12:15–12:45	Lunch	—
12:45–15:15	Metrics/add-ons/script activities 22–25 + revision	150
15:15–15:30	Assessment attendance and readiness	—
15:30–16:30	Written Assessment 9 questions	60 assessment
16:30–18:00	Practical Performance 3 tasks	90 assessment

© Tertiary Infotech Academy Pte Ltd

Briefing for Assessment

1

Individual open-book

Complete your own responses using the provided document.

2

Written knowledge

9 short-answer questions map one-to-one to K1–K9;60 minutes.

3

Practical performance

3 tasks map to A1–A7;90 minutes.

4

Evidence and submission

Provide policy, maintenance/comparison and metrics/improvement artifacts; upload on the LMS.

© Tertiary Infotech Academy Pte Ltd

Assessment and Funding

1

WA

60 minutes,9 questions; knowledge evidence K1–K9.

2

PP

90 minutes,3 tasks; ability evidence A1–A7.

3

Completion requirements

Follow current ATO assessment and attendance requirements.

4


Funding

Eligibility and current terms are determined by the official course listing and enrolment record.

© Tertiary Infotech Academy Pte Ltd

COURSE PORTAL

Login to LMS and Download Course Material

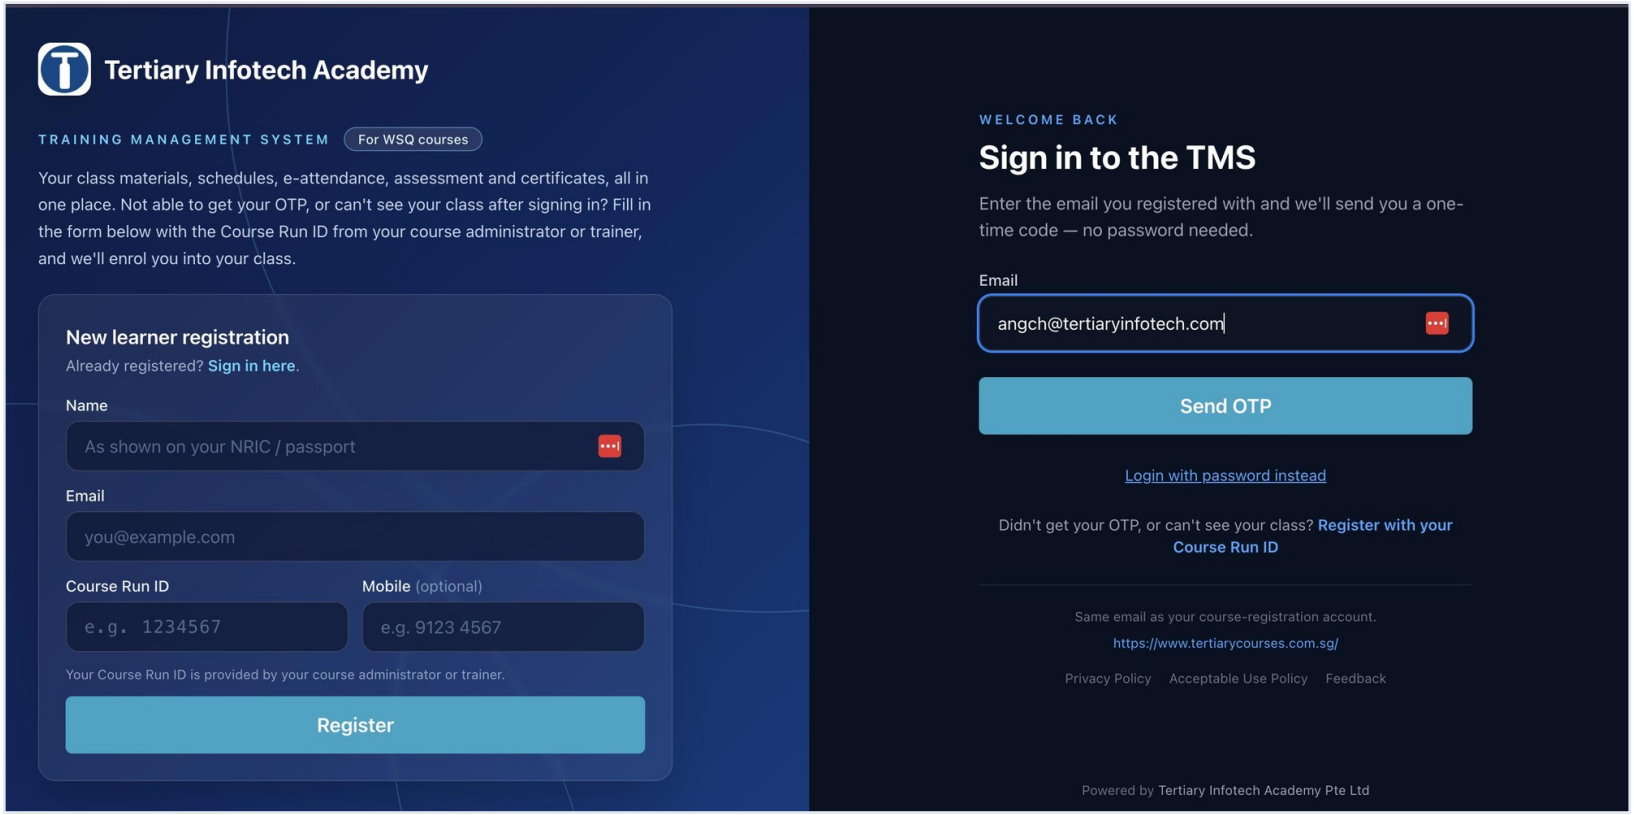


Log in at lms-tms.tertiaryinfotech.com with your registered email and the OTP sent to your inbox, then open this course to download the slides and Learner Guide.

Primary source: lms-tms.tertiaryinfotech.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

AUTHENTIC PORTAL EVIDENCE

Download Course Material

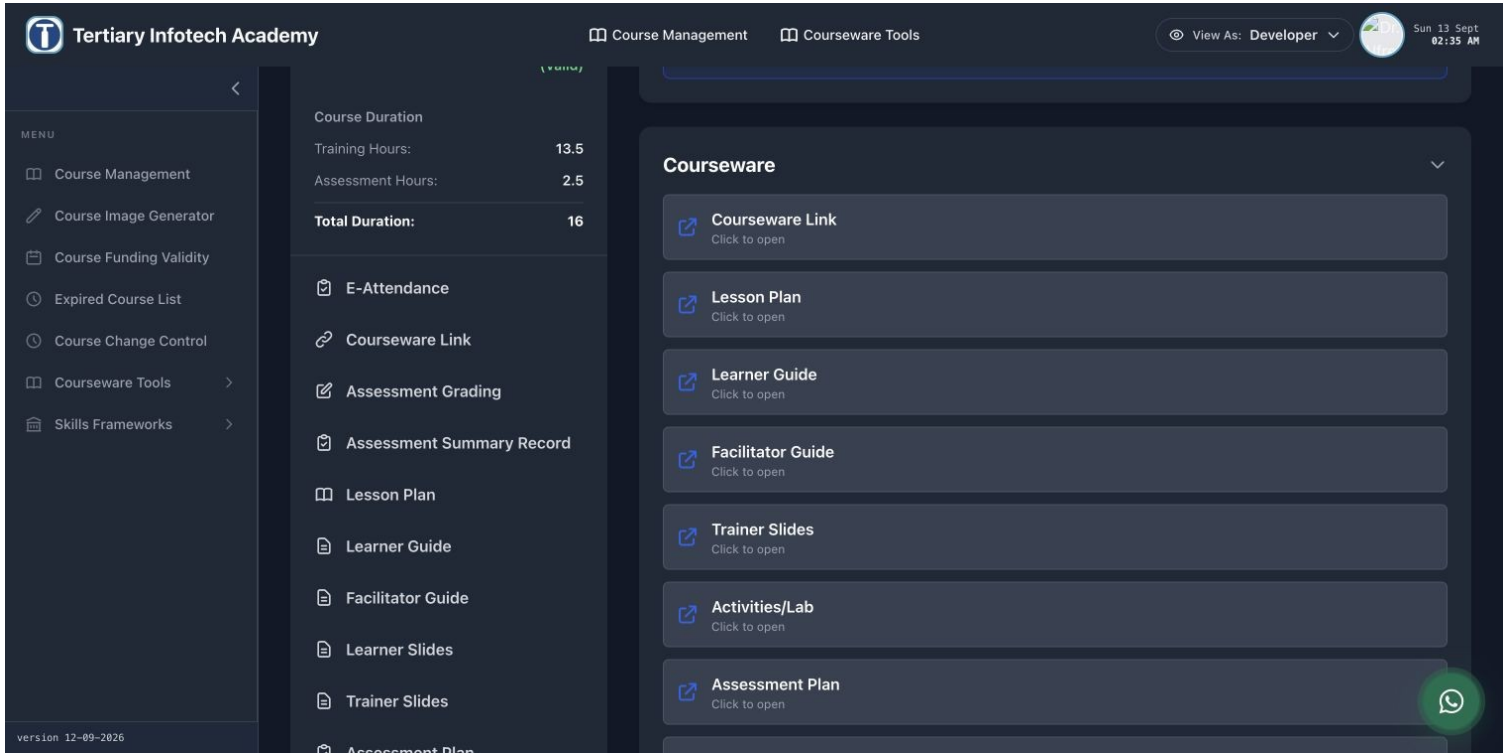

Portal courseware panel

Trainer view captured 13 September 2026.

Select current Learner Guide, slides PDF and Activities. Assessment answers are submitted through the class LMS.


https://lms-tms.tertiaryinfotech.com/

Primary source: lms-tms.tertiaryinfotech.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

COURSE ADMINISTRATION

Assessment Flow

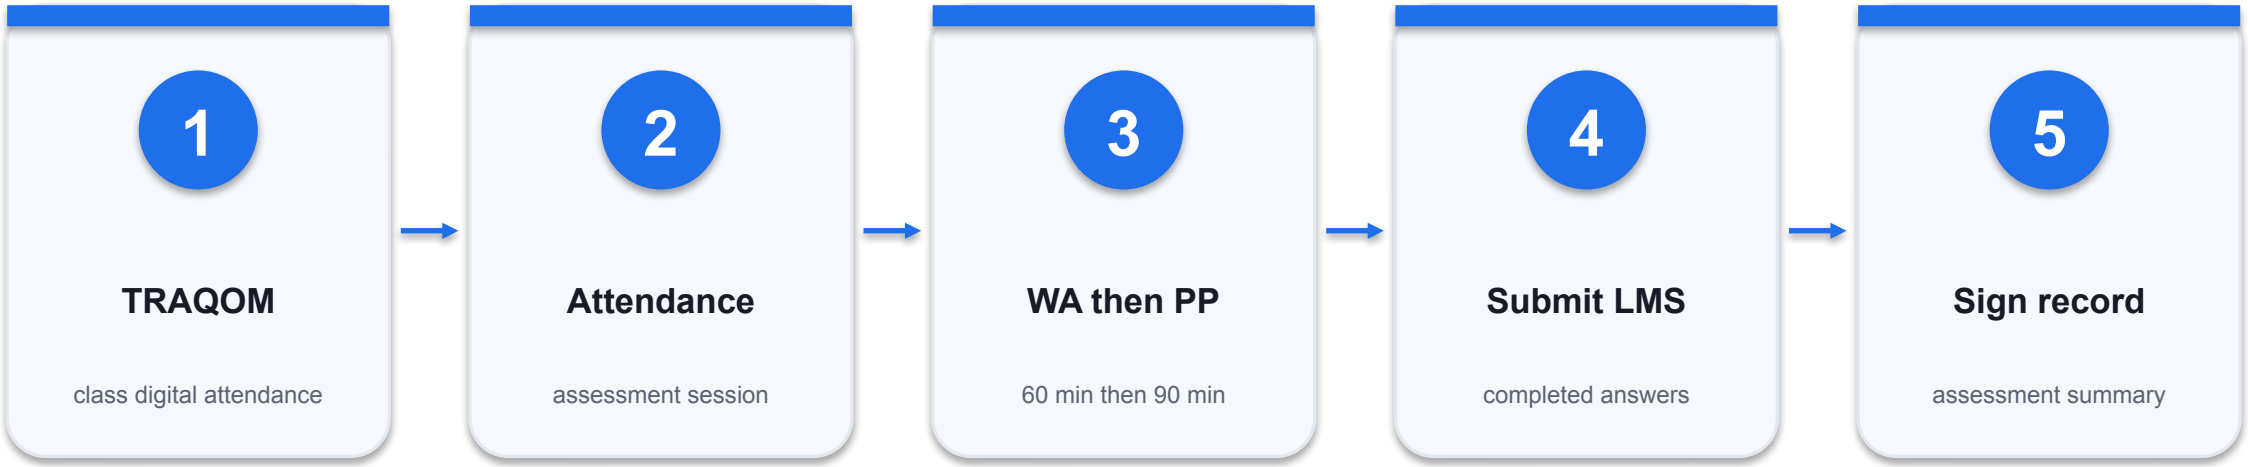

ORDER

Complete required attendance, assessment, upload and signed summary.

© Tertiary Infotech Academy Pte Ltd

Before You Start

1

Required core tools

Browser, Google training account, Drive, Docs, Sheets, Slides, Forms and Sites.

2

Account-dependent tools

Calendar/Meet/Chat plus shared drives and Admin reports where enabled.

3

Fallbacks

Use documented design/evidence route when an admin-only or edition feature is unavailable.

4

Activity package

Each folder includes guide, mock records, source links and acceptance checklist.

© Tertiary Infotech Academy Pte Ltd

SYNTHETIC CASE · HHS

SME Content Governance Scenario



Inspectable scenario contract

Finance invoices: Restricted Finance group.

Marketing drafts: named reviewers.

Approved product release: intended customer audience.

Form responses: Restricted staff store.

AI-generated conceptual illustration; labels describe our training model.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

1

TOPIC1 · LO1


Governance and Drive content lifecycle

K1 K2 K3 K5 A1 A2

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Content policy and identity

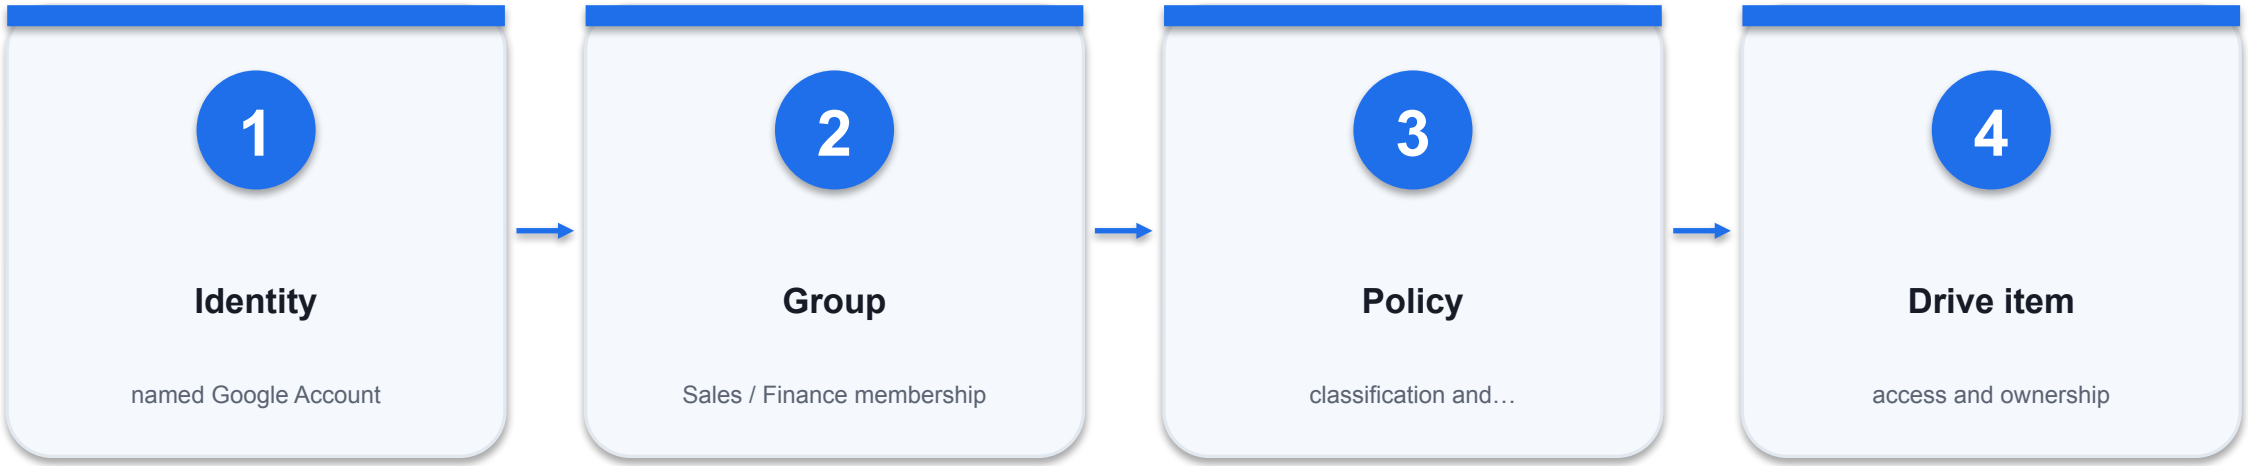

RUNTIME AND BOUNDARY

A policy assigns accountability; Drive sharing is the enforcement action. A document describing Restricted does not change any permission.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Contract · Content policy and identity

Field or control	Scenario value	Interpretation
Classification	Internal / Confidential / Public	Policy field, not automatic enforcement
Owner	Finance lead	Accountable for review
General access	Restricted	Default for internal records
Review date	2026-10-01	Monthly permission review

WHEN IT MATTERS An email alias is not a separate account. Groups grant access to their current members; membership therefore needs review.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Worked artifact · Content policy and identity

Synthetic training artifact; inspect fields and expected values.

POLICY CM-001 owner: Finance lead
Internal: named staff or approved group
Confidential: Finance group only
Public: approved release copy only
Agency access: named agency reviewer
Review: monthly and staff exit
Retention: approved business schedule
Exception: owner approval + expiry

Policy versus setting

A policy assigns accountability; Drive sharing is the enforcement action. A document describing Restricted does not change any permission.

Identity boundary

An email alias is not a separate account. Groups grant access to their current members; membership therefore needs review.

Administrator boundary


Only an authorised administrator changes domain or service controls. Learners draft a change request rather than alter a live tenant.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Decision · Content policy and identity

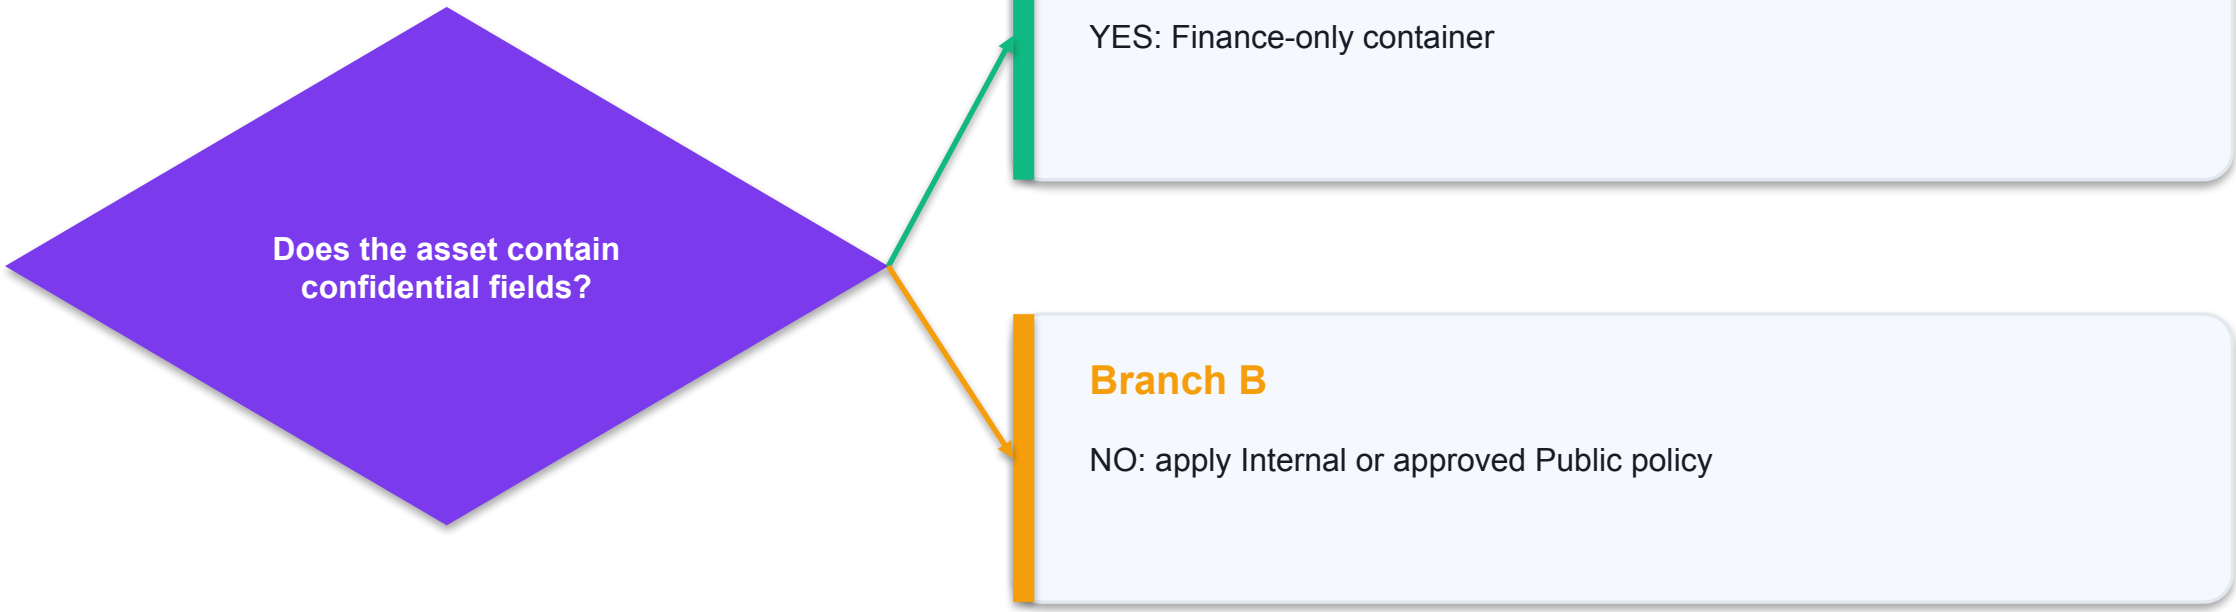

Only an authorised administrator changes domain or service controls. Learners draft a change request rather than alter a live tenant.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Fault isolation · Content policy and identity

Observed fault	Mechanism / cause	Corrective check
Policy says restricted; link opens	General access is broader than the written policy	Restrict actual sharing and test another identity
Group includes former staff	Membership outlasted employment	Remove group membership; review direct grants
No administrator rights	Tenant settings inaccessible	Produce administrator request and evidence plan

WHEN IT MATTERS Copy only approved non-sensitive content to the public asset area. Keep invoices in an independently restricted container.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Control ownership · Content policy and identity

Control point	Responsible actor	Evidence / constraint
Policy owner	Finance lead	Approves exceptions
Access reviewer	Operations lead	Checks groups and direct sharing
Publisher	Marketing lead	Approves public release copy
Administrator	Tenant admin	Controls organisation-level sharing

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Acceptance evidence · Content policy and identity

Evidence ID	Observed artifact	Acceptance requirement
POL-001	Policy approved	Named owner and monthly review
ACL-001	Internal folder	Restricted; staff group only
TEST-001	Agency account	Invoice access denied
EXC-001	Agency product draft	Commenter; approval recorded

WHEN IT MATTERS Completed policy covers classification, ownership, posting, review and exceptions; access evidence names the tested account and role.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Analysis · Content policy and identity

1

Policy versus setting

A policy assigns accountability; Drive sharing is the enforcement action. A document describing Restricted does not change any permission.

2

Identity boundary

An email alias is not a separate account. Groups grant access to their current members; membership therefore needs review.

3

Administrator boundary

Only an authorised administrator changes domain or service controls. Learners draft a change request rather than alter a live tenant.

4

Public release

Copy only approved non-sensitive content to the public asset area. Keep invoices in an independently restricted container.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY01 · K1 K5 A1

Content policy and identity

ACTIVITY01

20 minutes · Full procedure in Learner Guide and activities/activity-01-content-policy-and-identity-boundaries

Harbour Home Supplies is a fictional Singapore SME with Sales, Operations and Finance teams. Its migration contains supplier invoices, customer enquiries and public product sheets. An external agency needs only approved marketing assets.

YOU'LL BUILD

Completed policy covers classification, ownership, posting, review and exceptions; access evidence names the tested account and role.

TOOLCHAIN

Drive, Docs; administrator demonstration

DONE WHEN


Completed policy covers classification, ownership, posting, review and exceptions; access evidence names the tested account and role.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Drive ownership and teams

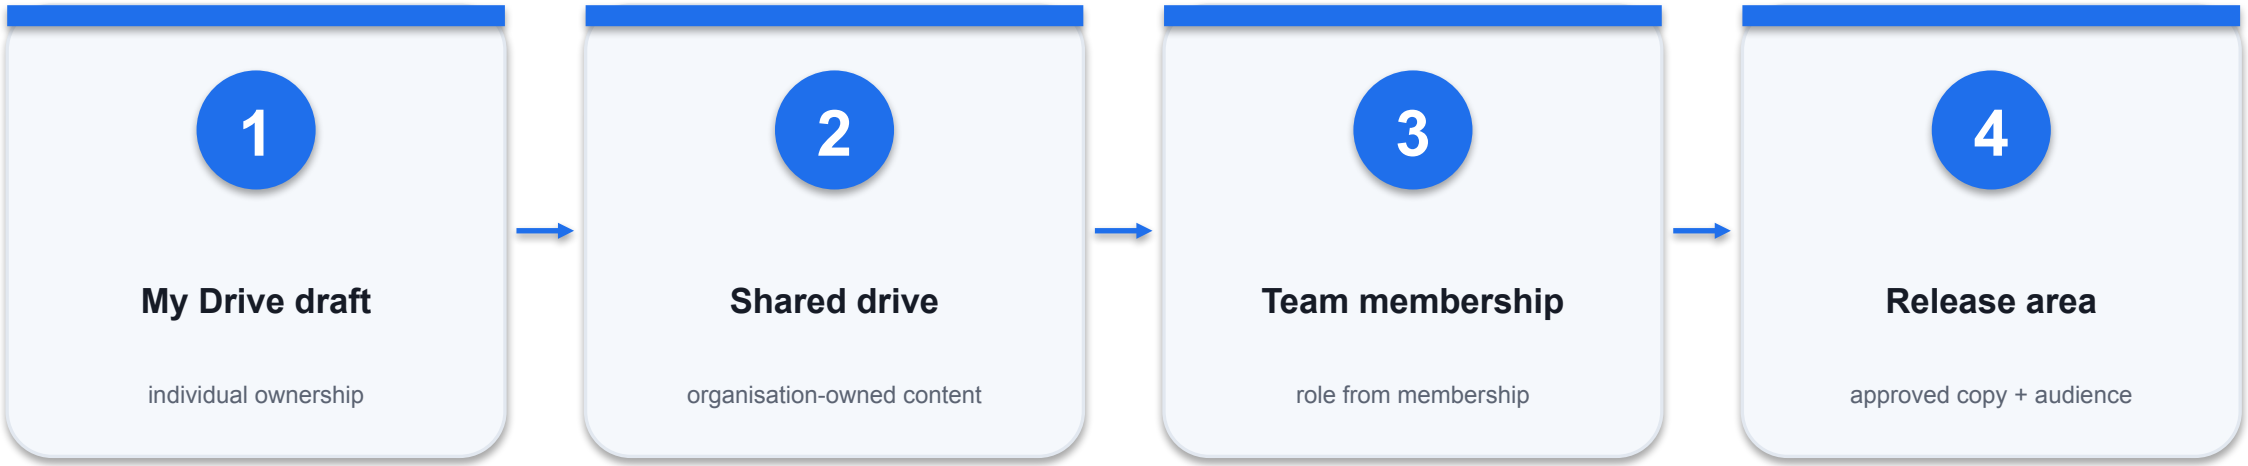

RUNTIME AND BOUNDARY

Organisation ownership is the reason to use shared drives for team records; it is separate from the ability to edit.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Contract · Drive ownership and teams

Field or control	Scenario value	Interpretation
My Drive owner	Individual account	Lifecycle includes ownership handover
Shared drive owner	Organisation	Files remain when a member leaves
Shared drive role	Manager / Content Manager / Contributor	Use least privilege
Folder exception	Limited access	Available to authorised managers

WHEN IT MATTERS Managers manage membership and settings. Contributors add and edit content without the broader Manager powers.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Worked artifact · Drive ownership and teams

Synthetic training artifact; inspect fields and expected values.

CONTENT REGISTER
asset_id: CAT-001
working_location: My Drive draft
target: HHS Marketing shared drive
business_owner: Marketing lead
editor_role: Contributor
release_status: Draft
handover_test: departing editor removed

Persistence

Organisation ownership is the reason to use shared drives for team records; it is separate from the ability to edit.

Role selection

Managers manage membership and settings. Contributors add and edit content without the broader Manager powers.

Move boundary

Moving an existing file can change effective access. Inspect direct grants and drive restrictions before and after a move.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Decision · Drive ownership and teams



Branch A

YES: shared drive where available

Branch B

NO: individual draft may be acceptable

Moving an existing file can change effective access. Inspect direct grants and drive restrictions before and after a move.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Fault isolation · Drive ownership and teams

Observed fault	Mechanism / cause	Corrective check
Shared drives not visible	Account or policy does not offer access	Use fallback; record limitation
Agency sees too much	Broad drive membership	Use narrow approved sharing or separate release area
Move changes access	Restrictions differ between containers	Compare effective audience before and after

WHEN IT MATTERS Shared drive availability depends on account and administrator settings. A Restricted My Drive training folder is the fallback, with a documented handover risk.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Control ownership · Drive ownership and teams

Control point	Responsible actor	Evidence / constraint
Membership	Manager	Approve new members
Editing	Contributor	Create/update assigned assets
Sensitive subset	Limited-access folder	Restrict applicable folder explicitly
Fallback handover	My Drive owner	Record transfer/review procedure

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Acceptance evidence · Drive ownership and teams

Evidence ID	Observed artifact	Acceptance requirement
OWN-001	CAT-001 location	Shared drive or documented fallback
ROLE-001	Editor identity	Contributor, not Manager
EXIT-001	Member removed	Organisation source remains
VIEW-001	Agency identity	Only approved asset available

WHEN IT MATTERS Folder structure and ownership register distinguish individual from organisation ownership; least-privilege role and unavailable-feature fallback are recorded.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Analysis · Drive ownership and teams

1

Persistence

Organisation ownership is the reason to use shared drives for team records; it is separate from the ability to edit.

2

Role selection

Managers manage membership and settings. Contributors add and edit content without the broader Manager powers.

3

Move boundary

Moving an existing file can change effective access. Inspect direct grants and drive restrictions before and after a move.

4

Availability

Shared drive availability depends on account and administrator settings. A Restricted My Drive training folder is the fallback, with a documented handover risk.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY02 · K1 K3 K5 A1 A2

Drive ownership and teams

ACTIVITY02 20 minutes · Full procedure in Learner Guide and activities/activity-02-drive-ownership-and-team-structure

A product catalogue must remain with Harbour Home Supplies when its editor leaves. A working draft currently sits in an individual My Drive folder. Decide where the source of record should live.

YOU'LL BUILD

Folder structure and ownership register distinguish individual from organisation ownership; least-privilege role and unavailable-feature fallback are recorded.

TOOLCHAIN

Drive; shared drive if available

DONE WHEN


Folder structure and ownership register distinguish individual from organisation ownership; least-privilege role and unavailable-feature fallback are recorded.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY03 · K1 A1

Effective access audit

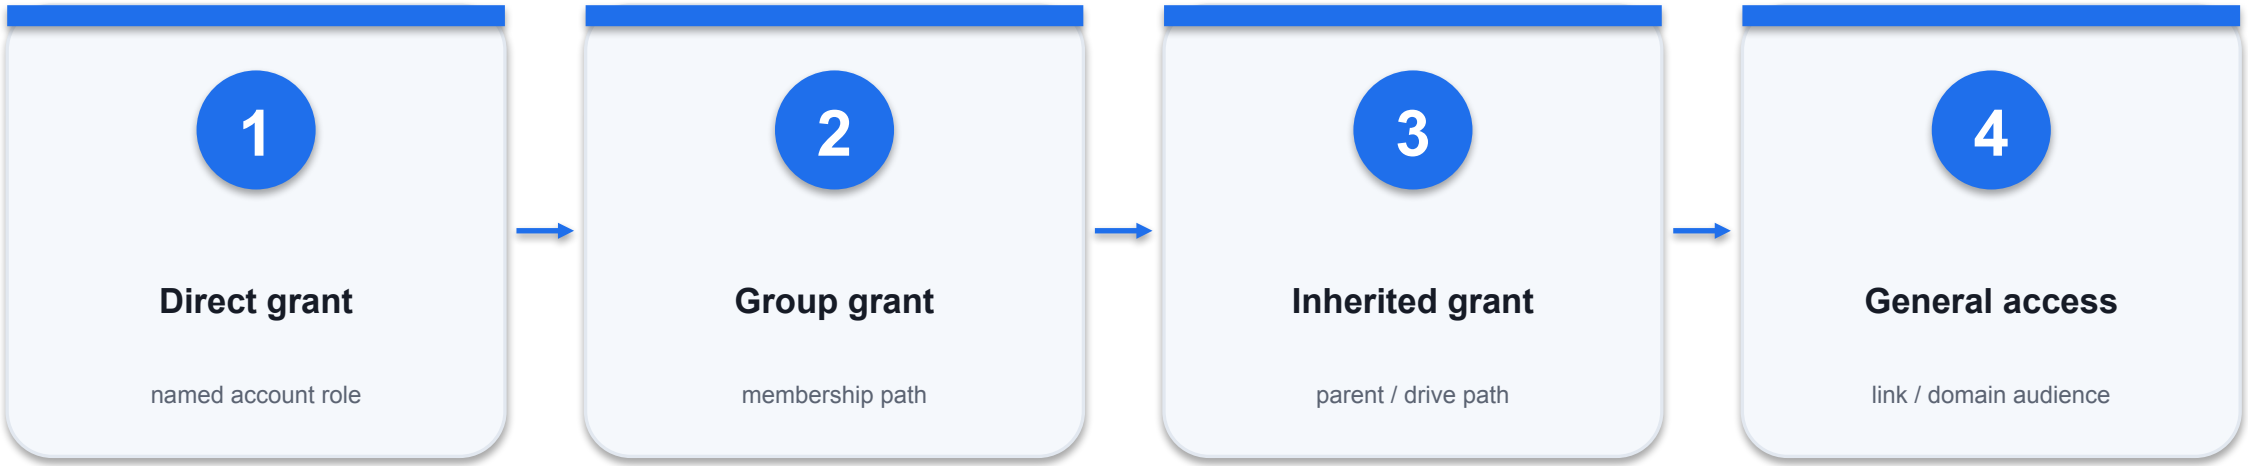

RUNTIME AND BOUNDARY

Removing one grant does not remove other access paths. A group or general audience can still authorise the account.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY03 · K1 A1

Contract · Effective access audit

Field or control	Scenario value	Interpretation
People with access	Account or group	Inspect direct and inherited paths
General access	Restricted / audience	May grant access without individual entry
Limited access	Folder-level control	Cannot manually apply to one file
Manager / owner	Privileged principal	Cannot remove their underlying access

WHEN IT MATTERS Adjust inherited sharing at its origin, or use an appropriate limited-access folder. Do not assume a child removal overrides all parent access.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY03 · K1 A1

Worked artifact · Effective access audit

Synthetic training artifact; inspect fields and expected values.

SYNTHETIC ACCESS RECORD
invoice.csv -> Finance folder
direct agency grant: removed
parent Marketing group: agency member
General access: Anyone with link
observed agency outcome: opens
expected Finance-only outcome: denied
finding: two access paths remain

Union of grants

Removing one grant does not remove other access paths. A group or general audience can still authorise the account.

Inheritance

Adjust inherited sharing at its origin, or use an appropriate limited-access folder. Do not assume a child removal overrides all parent access.


Limited-access exception

Current Drive supports folder-level limited access. Shared drive Managers and My Drive owners retain their privileged access.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Decision · Effective access audit

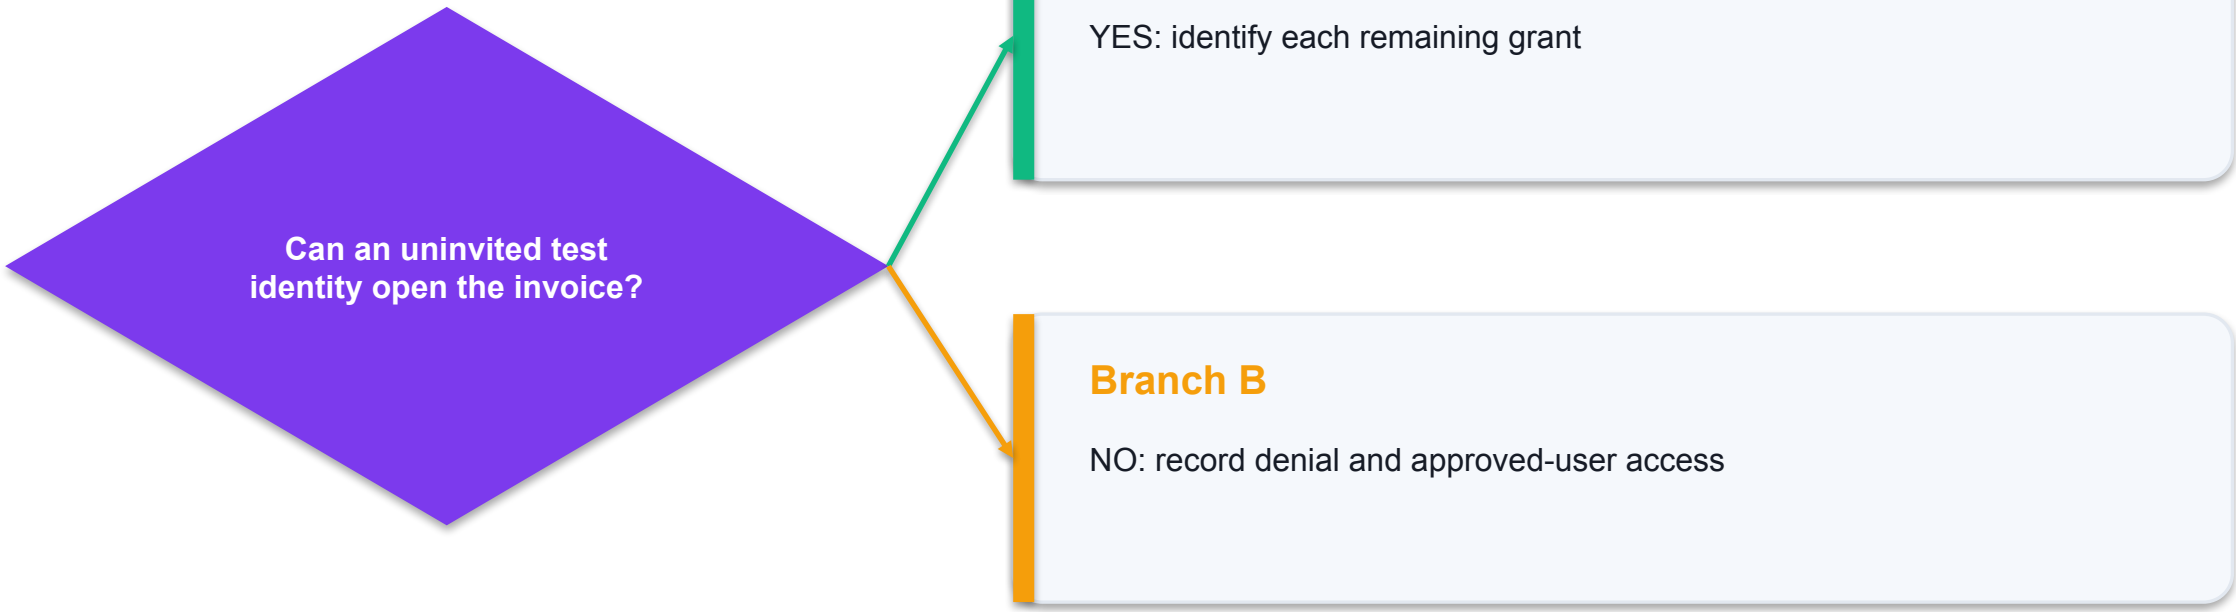

Current Drive supports folder-level limited access. Shared drive Managers and My Drive owners retain their privileged access.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY03 · K1 A1

Fault isolation · Effective access audit

Observed fault	Mechanism / cause	Corrective check
Removed user still opens	Group / inherited / general grant remains	Inspect and correct each authorised path
Folder limited; public file opens	File has another general/direct grant	Review both General access and People
Cannot modify inherited grant	Permission originates at parent	Owner/manager changes origin; record blocker

WHEN IT MATTERS A Share dialog is configuration evidence. A separate account opening or being denied the exact file is outcome evidence.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY03 · K1 A1

Control ownership · Effective access audit

Control point	Responsible actor	Evidence / constraint
Confidential file	Restricted container	No public or agency group grant
Group review	Membership register	Check nested or broad audience
Guest test	Separate test identity	Confirm expected deny
Recovery	Approved Finance account	Confirm expected allow

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY03 · K1 A1

Acceptance evidence · Effective access audit

Evidence ID	Observed artifact	Acceptance requirement
ACL-BEFORE	Agency	Opens through broader grant
ACL-AFTER	Agency	Denied after full correction
FIN-ALLOW	Finance tester	Can read expected file
REVIEW	Owner	Signs effective-access register

WHEN IT MATTERS Access register identifies all four grant paths; one approved allow and one uninvited deny outcome are recorded for the exact training asset.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Effective access audit

1

Union of grants

Removing one grant does not remove other access paths. A group or general audience can still authorise the account.

2

Inheritance

Adjust inherited sharing at its origin, or use an appropriate limited-access folder. Do not assume a child removal overrides all parent access.

3

Limited-access exception

Current Drive supports folder-level limited access. Shared drive Managers and My Drive owners retain their privileged access.

4

Verification

A Share dialog is configuration evidence. A separate account opening or being denied the exact file is outcome evidence.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY03 · K1 A1

Effective access audit

ACTIVITY03 25 minutes · Full procedure in Learner Guide and activities/activity-03-sharing-and-effective-access-audit

Finance deleted an agency user from one invoice file, but the agency still opens it through a group or public link. Diagnose all access paths rather than judging the direct People list alone.

YOU'LL BUILD

Access register identifies all four grant paths; one approved allow and one uninvited deny outcome are recorded for the exact training asset.

TOOLCHAIN

Drive, two test identities

DONE WHEN


Access register identifies all four grant paths; one approved allow and one uninvited deny outcome are recorded for the exact training asset.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Posting and asset metadata

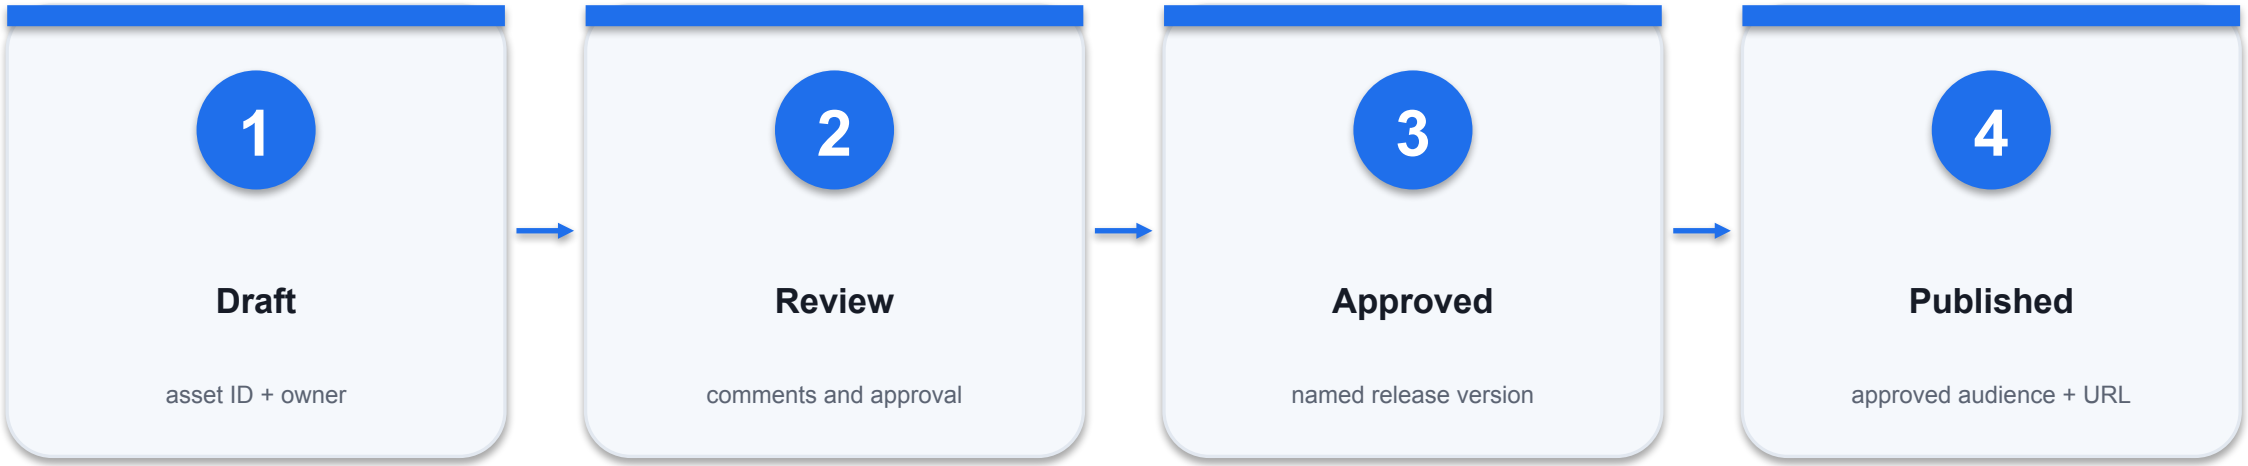

RUNTIME AND BOUNDARY

Draft and Approved are fields in our register, not a claim that Drive enforces a complete CMS approval workflow.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Contract · Posting and asset metadata

Field or control	Scenario value	Interpretation
asset_id	P-101	Stable business identifier
status	Draft / Review / Approved / Published	Business register states
source_url	Working Drive item	Do not substitute obsolete copy
published_on	2026-09-13	Release evidence and next review

WHEN IT MATTERS A single source URL reduces ambiguity. Downloads and exported PDFs are snapshots, so published copies require review.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Worked artifact · Posting and asset metadata

Synthetic training artifact; inspect fields and expected values.

asset_id, title, status, owner, review_due
P-101, Desk lamp, Published, Marketing,2026-10-13
P-102, Storage box, Review, Marketing,2026-09-20
P-103, Wall shelf, Draft, Operations,2026-09-20
P-101 release note: price SGD 49.00
v 1: obsolete price SGD 45.00
v 2: approved price SGD 49.00
register points to approved source URL

Business states

Draft and Approved are fields in our register, not a claim that Drive enforces a complete CMS approval workflow.

Stable source

A single source URL reduces ambiguity. Downloads and exported PDFs are snapshots, so published copies require review.

Version naming


Named editor versions make approved checkpoints inspectable; changing the filename alone does not prove content approval.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Decision · Posting and asset metadata

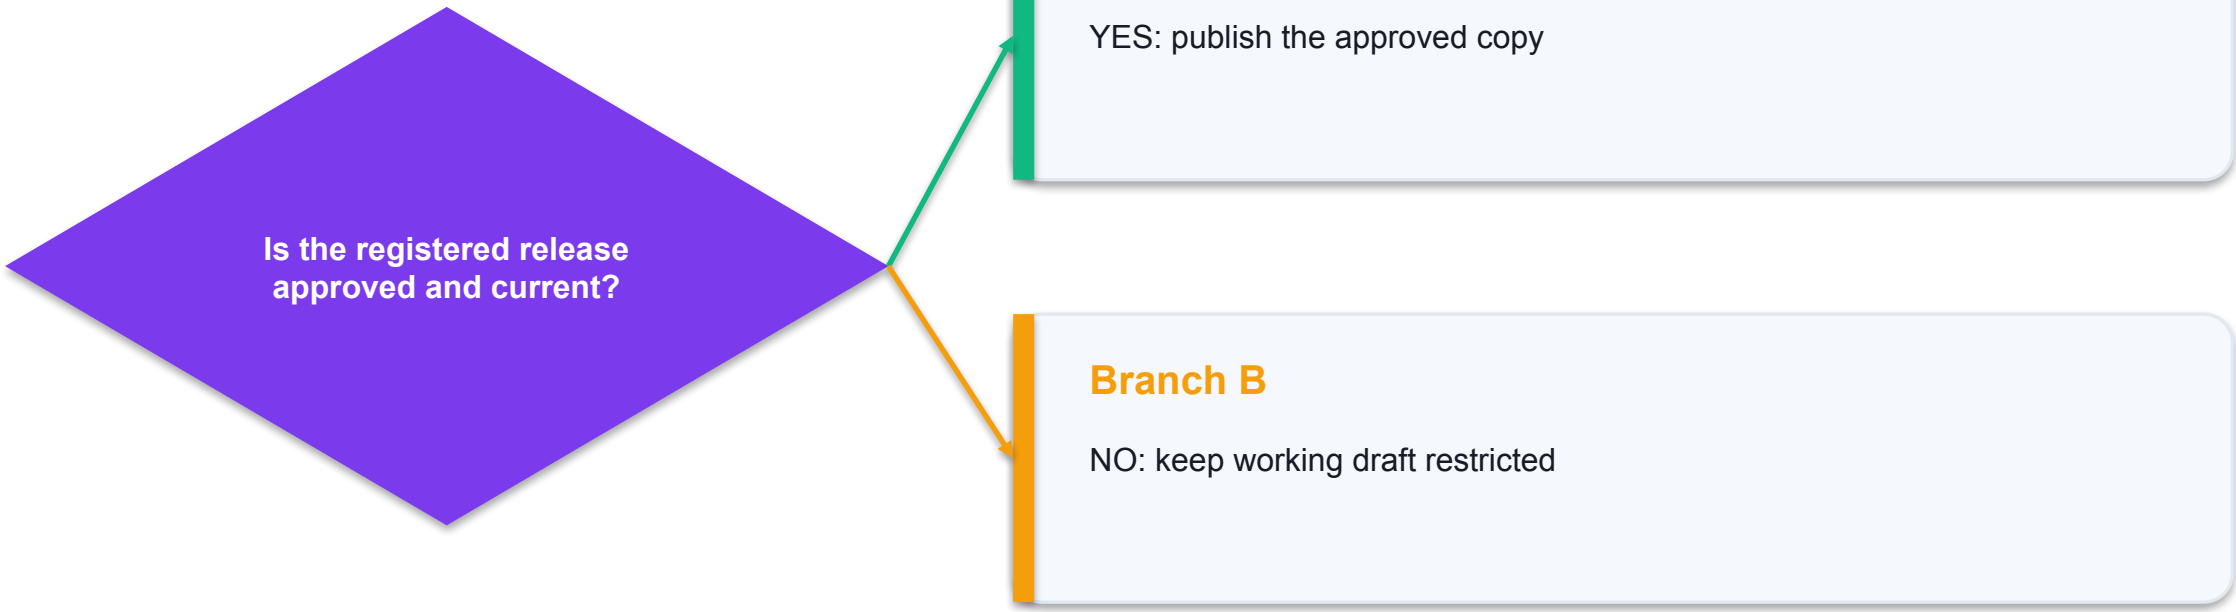

Named editor versions make approved checkpoints inspectable; changing the filename alone does not prove content approval.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Fault isolation · Posting and asset metadata

Observed fault	Mechanism / cause	Corrective check
Sales shares older PDF	Snapshot does not update with source	Replace public reference; verify release ID
Two current source links	Duplicate records for same asset ID	Choose authorised source and archive duplicate
Unapproved content publicly visible	Audience broadened before review	Restrict; approve and republish deliberately

WHEN IT MATTERS An obsolete public file needs removal from current navigation and a controlled archive policy; record references before retirement.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Control ownership · Posting and asset metadata

Control point	Responsible actor	Evidence / constraint
Creation	Editor	Assign ID and owner
Review	Reviewer	Resolve comments and factual checks
Publication	Publisher	Record current approved URL
Maintenance	Business owner	Check review due and linked copies

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Acceptance evidence · Posting and asset metadata

Evidence ID	Observed artifact	Acceptance requirement
META	P-101	ID, owner, status, due date populated
RELEASE	v 2	Price SGD 49 and approval note
URL	Published copy	Current intended audience
OLD	v 1 reference	No longer used in current index

WHEN IT MATTERS One current P-101 source is registered, price is SGD 49, approval checkpoint and viewer evidence exist, and obsolete reference is retired.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Analysis · Posting and asset metadata

1

Business states

Draft and Approved are fields in our register, not a claim that Drive enforces a complete CMS approval workflow.

2

Stable source

A single source URL reduces ambiguity. Downloads and exported PDFs are snapshots, so published copies require review.

3

Version naming

Named editor versions make approved checkpoints inspectable; changing the filename alone does not prove content approval.

4

Retirement

An obsolete public file needs removal from current navigation and a controlled archive policy; record references before retirement.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY04 · K2 K5 A2

Posting and asset metadata

ACTIVITY04 20 minutes · Full procedure in Learner Guide and activities/activity-04-posting-lifecycle-and-asset-metadata

Product sheet P-101 has three competing copies. Sales sent an obsolete price. Create a single source of record with an explicit business publication lifecycle.

YOU'LL BUILD

One current P-101 source is registered, price is SGD 49, approval checkpoint and viewer evidence exist, and obsolete reference is retired.

TOOLCHAIN

Drive, Docs, Sheets

DONE WHEN


One current P-101 source is registered, price is SGD 49, approval checkpoint and viewer evidence exist, and obsolete reference is retired.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Search and version recovery

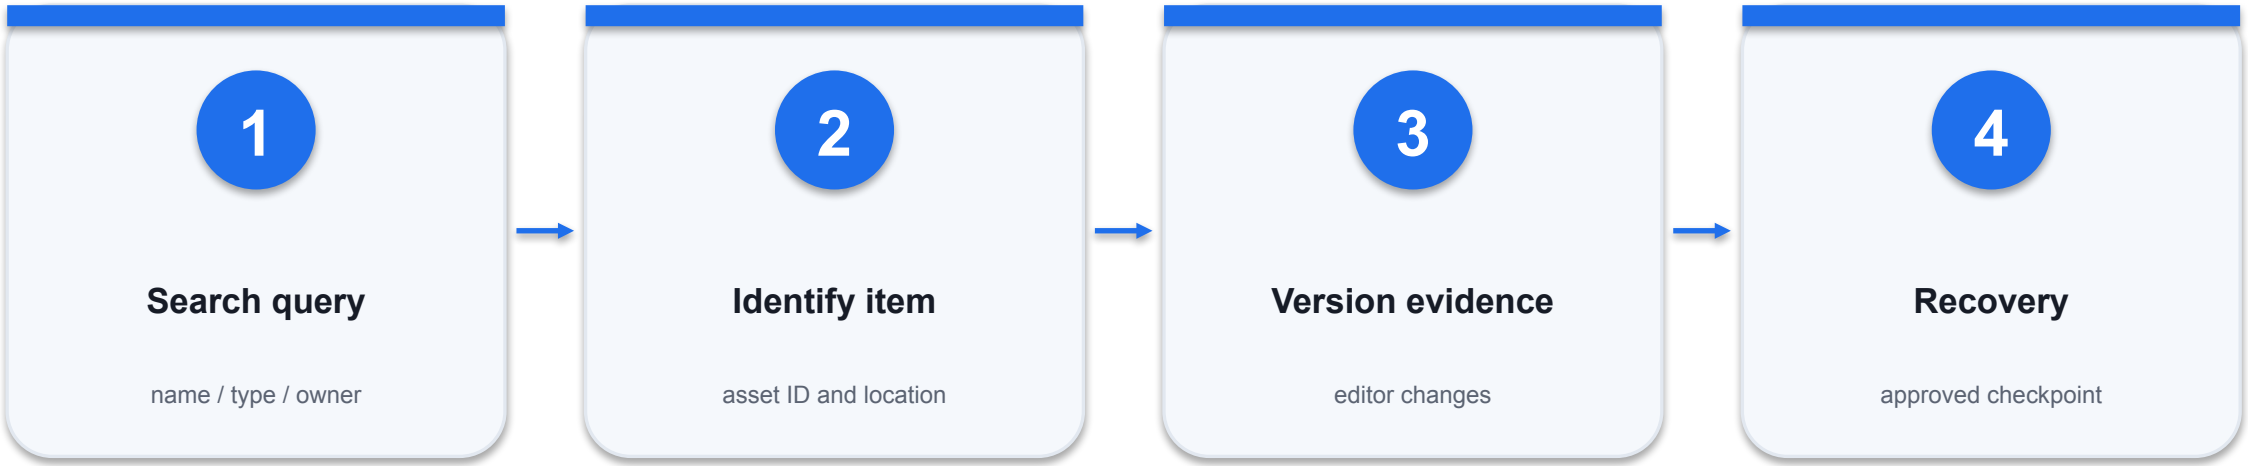

RUNTIME AND BOUNDARY

A familiar filename is insufficient. Match asset ID, owner, location and current release record.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Contract · Search and version recovery

Field or control	Scenario value	Interpretation
Search terms	delivery checklist	Match title then verify asset ID
Type filter	Documents	Reduce irrelevant results
Location	Approved Assets	Distinguish draft from release
Version history	named checkpoint	Requires appropriate access

WHEN IT MATTERS A version restore changes current content; compare the selected checkpoint and keep a review record.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Worked artifact · Search and version recovery

Synthetic training artifact; inspect fields and expected values.

SEARCH EVIDENCE
query: delivery checklist
result A: DELIVERY-01 Draft
result B: DELIVERY-01 Approved
approved checkpoint: Dispatch v 2
missing line: verify customer address
recovery record: restored approved content
validation: address check present

Identity check

A familiar filename is insufficient. Match asset ID, owner, location and current release record.

Recovery target

A version restore changes current content; compare the selected checkpoint and keep a review record.

Editor versus binary


Native editor version history and uploaded-file versions are different mechanisms. Inspect the appropriate history for the item type.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Decision · Search and version recovery

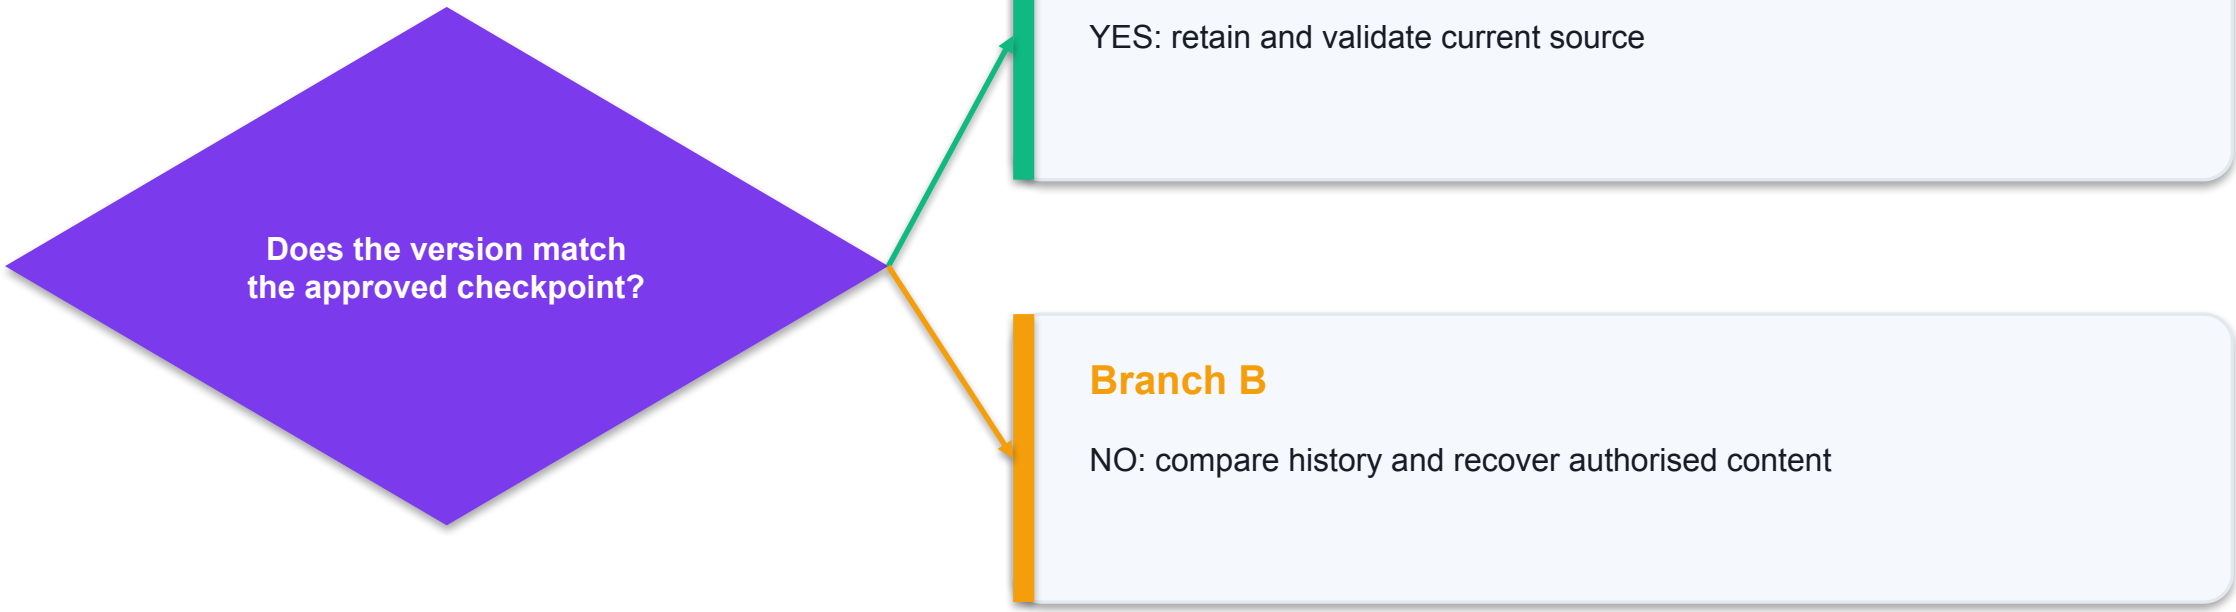

Native editor version history and uploaded-file versions are different mechanisms. Inspect the appropriate history for the item type.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Fault isolation · Search and version recovery

Observed fault	Mechanism / cause	Corrective check
Correct file absent from search	Wrong account, location or access	Test known URL and invited identity
Draft mistaken for current	Title reused without asset identifier	Validate register and approved location
Restored content still incomplete	Wrong checkpoint selected	Compare explicit acceptance lines

WHEN IT MATTERS Not found and not authorised can look similar. Verify the invited identity and known source URL before creating a duplicate.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Control ownership · Search and version recovery

Control point	Responsible actor	Evidence / constraint
Search	User	Use asset ID and type
Version review	Editor	Compare changes before restore
Recovery approval	Owner	Authorise checkpoint
Post recovery	Reviewer	Check required dispatch line

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Acceptance evidence · Search and version recovery

Evidence ID	Observed artifact	Acceptance requirement
FIND	DELIVERY-01	Correct location and identifier
HISTORY	Dispatch v 2	Approved checkpoint identified
RECOVER	Current text	Address check restored
ACCESS	Intended viewer	Known URL opens

WHEN IT MATTERS Correct checklist identity is found and the approved address verification line is restored with an inspectable recovery log.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Analysis · Search and version recovery

1

Identity check

A familiar filename is insufficient. Match asset ID, owner, location and current release record.

2

Recovery target

A version restore changes current content; compare the selected checkpoint and keep a review record.

3

Editor versus binary

Native editor version history and uploaded-file versions are different mechanisms. Inspect the appropriate history for the item type.

4

Access failure

Not found and not authorised can look similar. Verify the invited identity and known source URL before creating a duplicate.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY05 · K3 K5 A2

Search and version recovery

ACTIVITY05 20 minutes · Full procedure in Learner Guide and activities/activity-05-search-recovery-and-version-diagnosis

The warehouse manager cannot find the approved delivery checklist. The search result contains a similarly named draft, and an edit removed an important dispatch check.

YOU'LL BUILD

Correct checklist identity is found and the approved address verification line is restored with an inspectable recovery log.

TOOLCHAIN

Drive, Docs

DONE WHEN

Correct checklist identity is found and the approved address verification line is restored with an inspectable recovery log.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

TOPIC2 · LO2

Content assets and customer web properties

K2 K3 K4 K5 K7 K8 A2 A3 A4 A7

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Docs structure and review



RUNTIME AND BOUNDARY

Heading styles encode hierarchy; simply making text large or bold does not provide the same outline structure.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Contract · Docs structure and review

Field or control	Scenario value	Interpretation
Heading styles	Heading 1 / Heading 2	Structure supports outline and navigation
Mode	Suggesting	Proposal does not replace accepted text yet
Comment	specific selection + issue	Resolve after decision
Version	Approved delivery policy	Auditable release checkpoint

WHEN IT MATTERS Suggestions are proposals. An authorised editor accepts or rejects them; comments record discussion and can be resolved.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Worked artifact · Docs structure and review

Synthetic training artifact; inspect fields and expected values.

DELIVERY POLICY DP-01
Heading 1: Delivery eligibility
Heading 2: Standard delivery
Charge: SGD 5 for orders below SGD 80
Heading 1: Returns
Reviewer suggestion: 14-day window
Editor decision: accept verified 14 days
Version: Approved DP-01 v 2

Structure

Heading styles encode hierarchy; simply making text large or bold does not provide the same outline structure.

Review contract

Suggestions are proposals. An authorised editor accepts or rejects them; comments record discussion and can be resolved.

Source validation


The policy must trace delivery price and return window to a business-approved source, not an invented reviewer assumption.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Decision · Docs structure and review

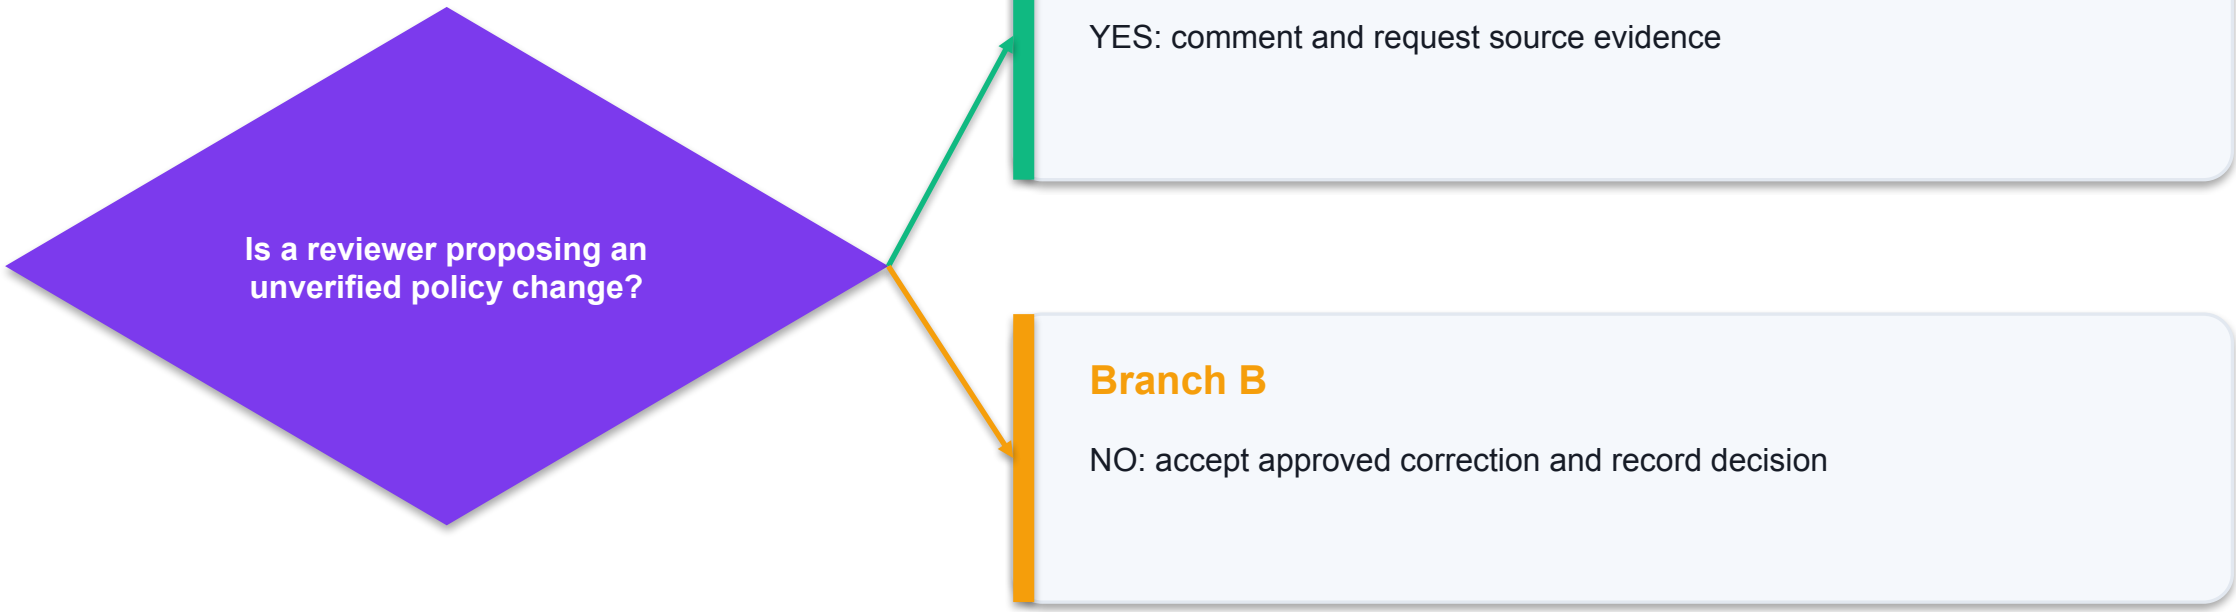

The policy must trace delivery price and return window to a business-approved source, not an invented reviewer assumption.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Fault isolation · Docs structure and review

Observed fault	Mechanism / cause	Corrective check
Outline missing headings	Direct formatting used instead of styles	Apply Heading 1/2 to structure
Reviewer overwrites content	Editing mode used for review	Use Suggesting and review role
Comment resolved but text wrong	Discussion closure mistaken for correction	Check final policy text and approval

WHEN IT MATTERS A named approved checkpoint plus an approval record identifies the version intended for distribution.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Control ownership · Docs structure and review

Control point	Responsible actor	Evidence / constraint
Author	Editor role	Maintains source document
Reviewer	Commenter or permitted suggestion	Proposes corrections
Decision	Editor + business owner	Accepts approved changes
Distribution	Publisher	Checks release checkpoint and audience

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Acceptance evidence · Docs structure and review

Evidence ID	Observed artifact	Acceptance requirement
STRUCT	Outline	Two Heading 1 sections visible
REVIEW	Suggestion	14-day proposal recorded
DECISION	Accepted text	Verified terms reflected
RELEASE	Named version	DP-01 v 2 approved

WHEN IT MATTERS Heading outline works; supported 14-day return correction is accepted, unsupported change rejected, and approved version evidence is saved.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Analysis · Docs structure and review

1

Structure

Heading styles encode hierarchy; simply making text large or bold does not provide the same outline structure.

2

Review contract

Suggestions are proposals. An authorised editor accepts or rejects them; comments record discussion and can be resolved.

3

Source validation

The policy must trace delivery price and return window to a business-approved source, not an invented reviewer assumption.

4

Release state

A named approved checkpoint plus an approval record identifies the version intended for distribution.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY06 · K2 K4 A2 A3

Docs structure and review

ACTIVITY06 25 minutes · Full procedure in Learner Guide and activities/activity-06-docs-structure-and-collaborative-review

A delivery policy is hard to navigate and reviewers overwrite each other. Build a structured document and distinguish proposed edits from accepted content.

YOU'LL BUILD

Heading outline works; supported 14-day return correction is accepted, unsupported change rejected, and approved version evidence is saved.

TOOLCHAIN

Docs, Drive

DONE WHEN


Heading outline works; supported 14-day return correction is accepted, unsupported change rejected, and approved version evidence is saved.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Docs publication templates

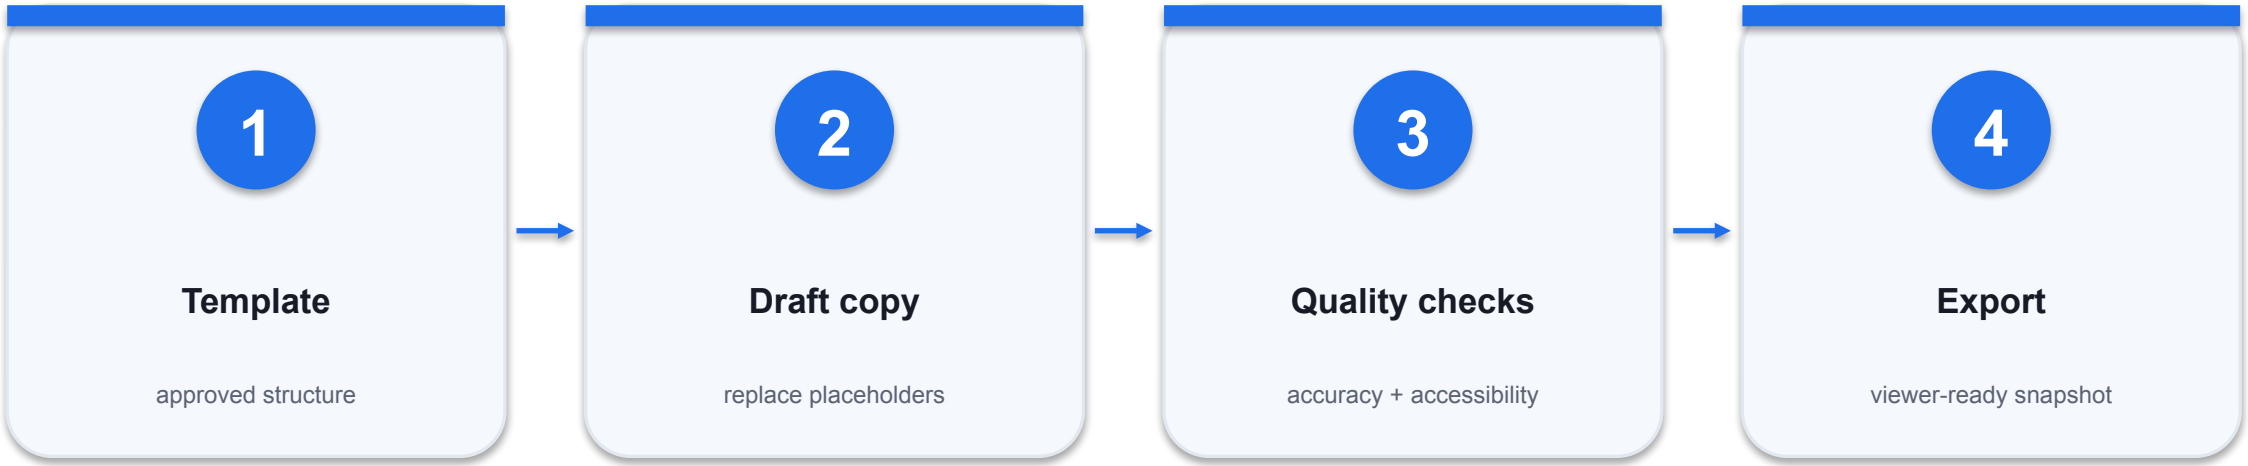

RUNTIME AND BOUNDARY

A template constrains structure but cannot prove correctness. Each copy still needs a source and reviewer.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Contract · Docs publication templates

Field or control	Scenario value	Interpretation
Template fields	product, price, contact, version	No unreplaced placeholders
Internal fields	unit_cost	Exclude from public copy
Link text	View delivery terms	Descriptive purpose
Image text	Alternative text	Meaningful description where appropriate

WHEN IT MATTERS Deleting a visible cost from the public export is only one check. Review comments, links, embedded tables and metadata of the distributed artifact.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Worked artifact · Docs publication templates

Synthetic training artifact; inspect fields and expected values.

BROCHURE RELEASE CHECK
product: Modular storage box
price: SGD 29.00
contact: sales@harbour.example
unit_cost: REMOVE before release
placeholder {{PRODUCT}}: none remaining
delivery_terms: descriptive link
approval: Marketing lead / 2026-09-13

Template scope

A template constrains structure but cannot prove correctness. Each copy still needs a source and reviewer.

Redaction

Deleting a visible cost from the public export is only one check. Review comments, links, embedded tables and metadata of the distributed artifact.

Readable links


Descriptive link text helps a reader predict destination; test the viewer's permission on the target as well as the link itself.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Decision · Docs publication templates

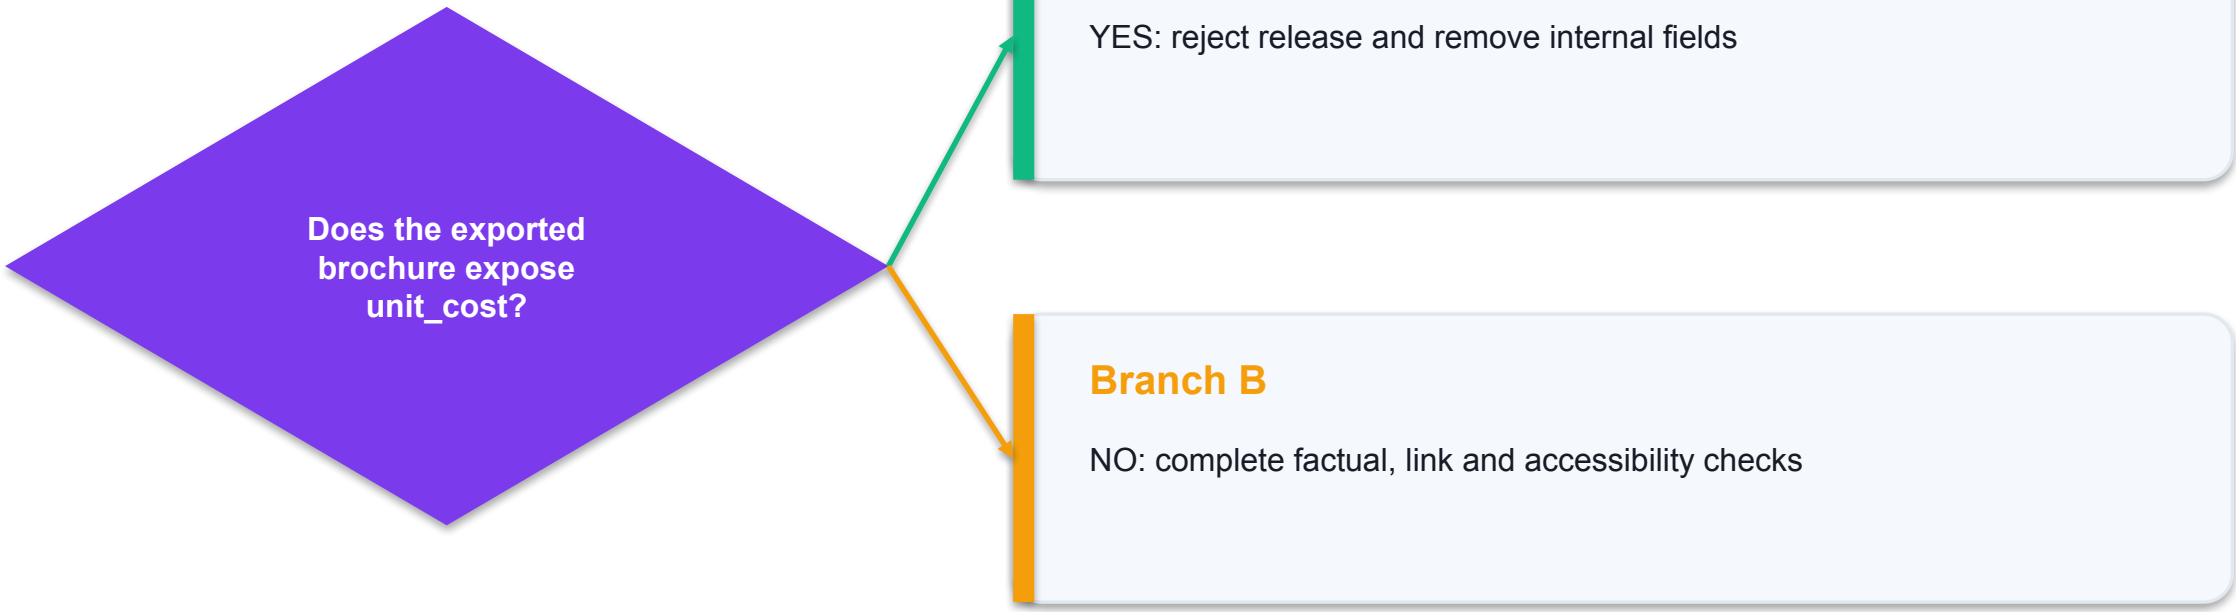

Descriptive link text helps a reader predict destination; test the viewer’s permission on the target as well as the link itself.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Fault isolation · Docs publication templates

Observed fault	Mechanism / cause	Corrective check
Placeholder remains	Template fields incomplete	Search for double-brace markers
PDF contains old address	Export predates source update	Regenerate from approved current source
Link gives permission error	Target ACL differs from brochure	Share approved target to intended audience

WHEN IT MATTERS PDF is a snapshot. A later source edit requires a newly reviewed export and replacement of the published reference.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Control ownership · Docs publication templates

Control point	Responsible actor	Evidence / constraint
Facts	Product owner	Checks price and contact
Internal-data review	Finance reviewer	No costs or confidential details
Accessibility	Editor	Meaningful headings and image text
Release	Publisher	Checks PDF and target URLs

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Acceptance evidence · Docs publication templates

Evidence ID	Observed artifact	Acceptance requirement
FACT	Price	SGD 29 matches approved product record
LEAK	unit_cost	Absent from public export
LINK	Delivery terms	Intended viewer can open
PDF	Release copy	Current version and readable layout

WHEN IT MATTERS Brochure has no template placeholders or internal cost, accurate product facts, a tested descriptive link, and a readable approved PDF.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Analysis · Docs publication templates

1

Template scope

A template constrains structure but cannot prove correctness. Each copy still needs a source and reviewer.

2

Redaction

Deleting a visible cost from the public export is only one check. Review comments, links, embedded tables and metadata of the distributed artifact.

3

Readable links

Descriptive link text helps a reader predict destination; test the viewer’s permission on the target as well as the link itself.

4

Export divergence

PDF is a snapshot. A later source edit requires a newly reviewed export and replacement of the published reference.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY07 · K2 K4 A2 A3

Docs publication templates

ACTIVITY07

20 minutes · Full procedure in Learner Guide and activities/activity-07-docs-templates-and-publication-readiness

Sales reuses a brochure containing an old address and an internal cost figure. Apply a publication checklist to a controlled template before export.

YOU'LL BUILD

Brochure has no template placeholders or internal cost, accurate product facts, a tested descriptive link, and a readable approved PDF.

TOOLCHAIN

Docs, Drive

DONE WHEN


Brochure has no template placeholders or internal cost, accurate product facts, a tested descriptive link, and a readable approved PDF.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Sheets import and validation

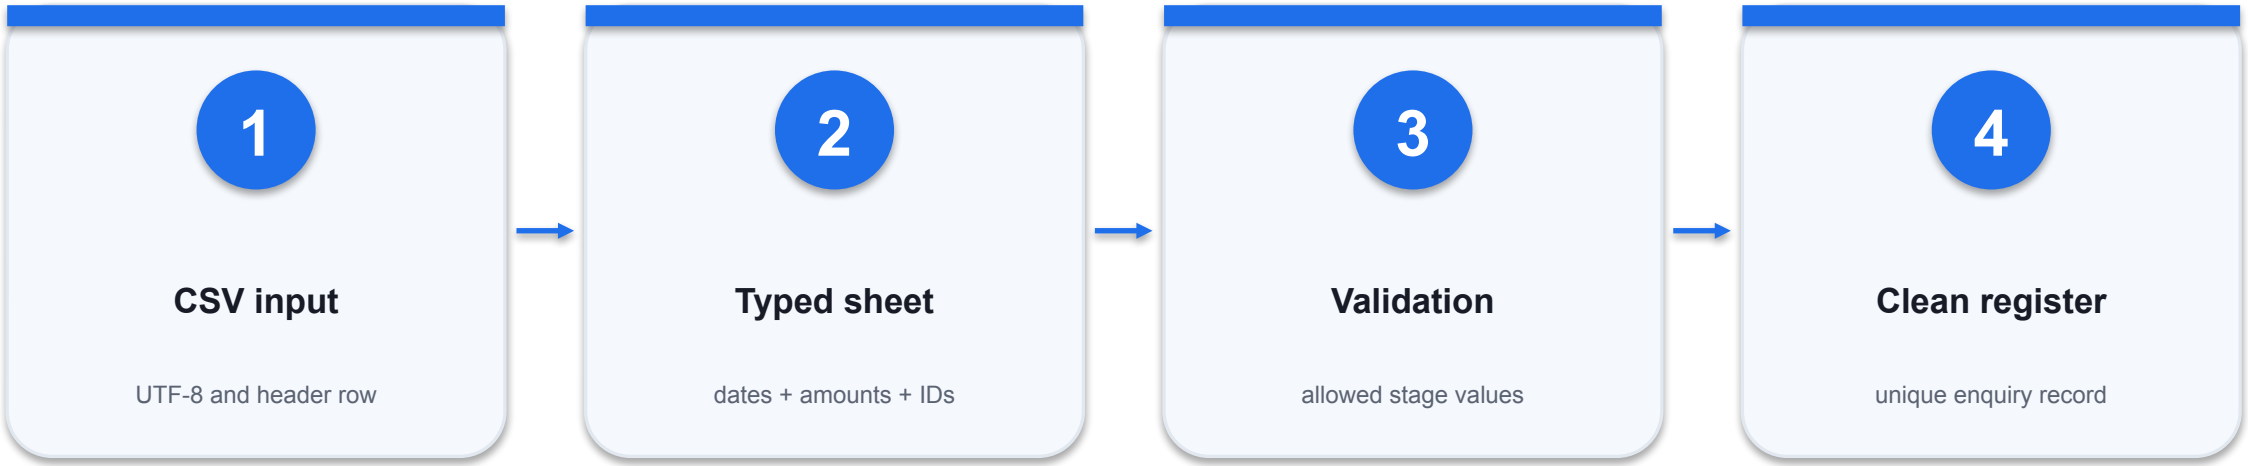

RUNTIME AND BOUNDARY

Duplicate rows may be repeats rather than new customers. Resolve using the stable enquiry ID before summing revenue.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Contract · Sheets import and validation

Field or control	Scenario value	Interpretation
enquiry_id	E001...E012	Required unique identifier
amount_sgd	Numeric >=0	Currency formatting is not data cleaning
stage	New / Qualified / Won / Lost	Dropdown rejects invalid input
created_on	ISO date in source	Check interpreted date and locale

WHEN IT MATTERS Formatting a text cell as currency does not guarantee numeric values. Check ISNUMBER and the source import.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Worked artifact · Sheets import and validation

Synthetic training artifact; inspect fields and expected values.

```
enquiry_id, created_on, stage, amount_sgd
E001,2026-09-01, New,120
E002,2026-09-02, Qualified,240
E003,2026-09-03, Won,360
E003,2026-09-03, Won,360
E004,2026-09-04, won,180
=COUNTIF(A:A, A2)>1
duplicate E003 must be reviewed
```

Identifier rule

Duplicate rows may be repeats rather than new customers. Resolve using the stable enquiry ID before summing revenue.

Type boundary

Formatting a text cell as currency does not guarantee numeric values. Check ISNUMBER and the source import.

Validation


An allowed-value dropdown standardises new edits; audit existing invalid values rather than assuming validation cleans them.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Decision · Sheets import and validation

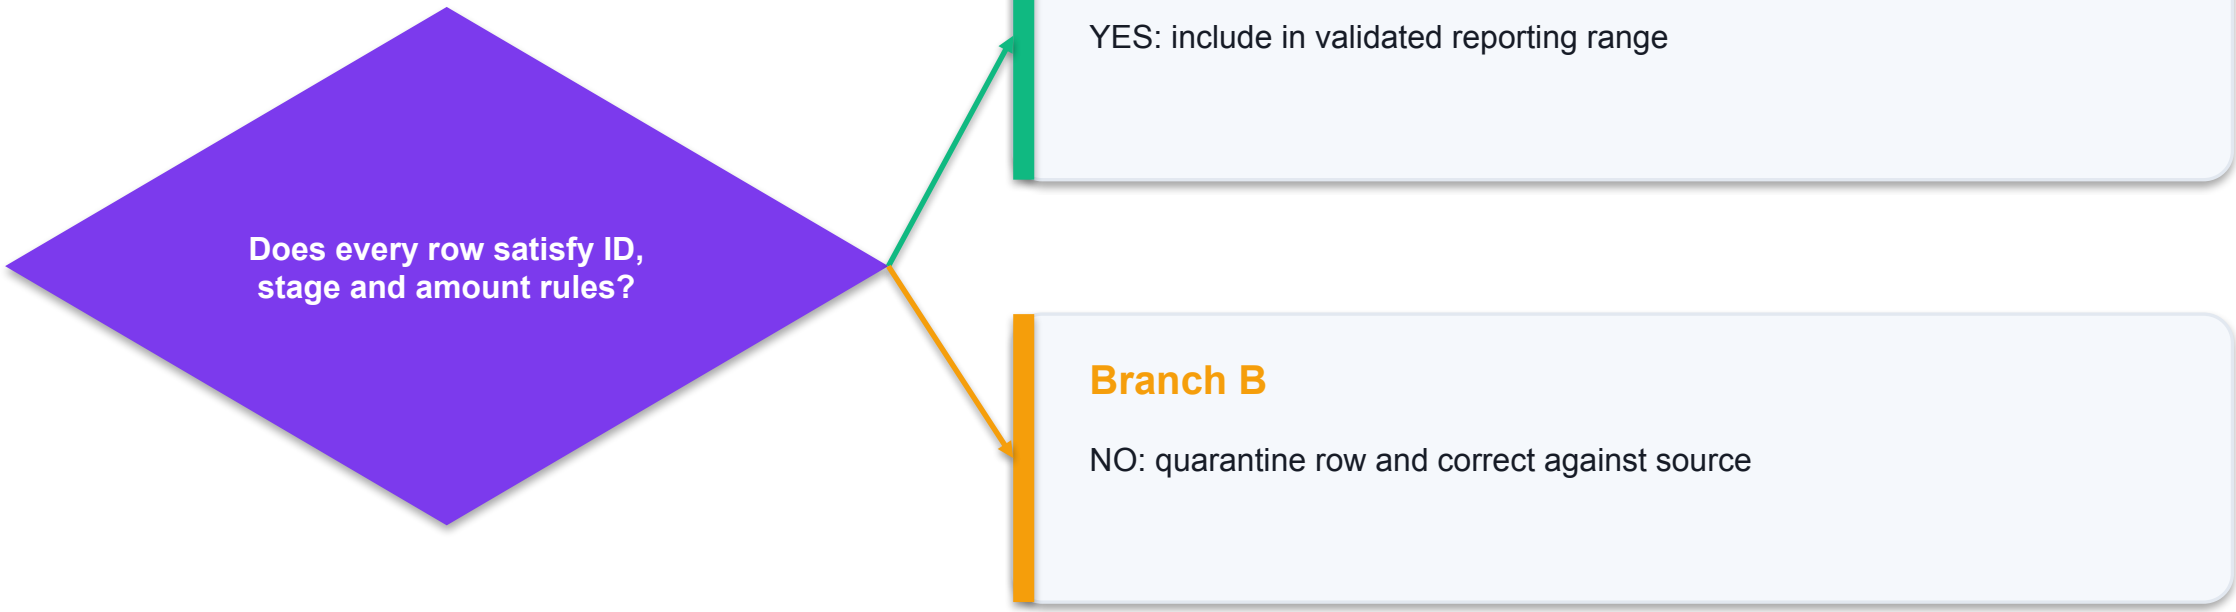

An allowed-value dropdown standardises new edits; audit existing invalid values rather than assuming validation cleans them.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Fault isolation · Sheets import and validation

Observed fault	Mechanism / cause	Corrective check
Revenue unexpectedly zero	Amounts imported as text	Test ISNUMBER; correct source/import
Stage groups split	won and Won differ	Standardise against allowed stages
Revenue inflated	Duplicate enquiry ID counted twice	Review duplicate IDs before removal

WHEN IT MATTERS Dates and decimal separators depend on spreadsheet locale. ISO source dates and explicit type checks reduce ambiguity.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Control ownership · Sheets import and validation

Control point	Responsible actor	Evidence / constraint
Schema	Data owner	Document required columns
Input	Dropdown rule	Reject invalid new stages
Cleaning	Reviewer	Resolve duplicates from source
Formula range	Analyst	Exclude headers and quarantined rows

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Acceptance evidence · Sheets import and validation

Evidence ID	Observed artifact	Acceptance requirement
ROWS	Input	12 unique IDs after review
STAGE	Validation	Invalid PendingRejected input blocked
TYPE	Amounts	ISNUMBER true on report rows
DUP	E003	Duplicate resolution documented

WHEN IT MATTERS Clean sheet contains 12 unique enquiries, valid stages and numeric amounts; duplicate/type decisions and invalid-input rejection are evidenced.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Sheets import and validation

1

Identifier rule

Duplicate rows may be repeats rather than new customers. Resolve using the stable enquiry ID before summing revenue.

2

Type boundary

Formatting a text cell as currency does not guarantee numeric values. Check ISNUMBER and the source import.

3

Validation

An allowed-value dropdown standardises new edits; audit existing invalid values rather than assuming validation cleans them.

4

Locale

Dates and decimal separators depend on spreadsheet locale. ISO source dates and explicit type checks reduce ambiguity.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY08 · K2 K4 A2

Sheets import and validation

ACTIVITY08 25 minutes · Full procedure in Learner Guide and activities/activity-08-sheets-import-schema-and-data-validation

Enquiry data has duplicate IDs, numeric amounts stored as text and inconsistent stages. A marketing report is unreliable until the data contract is validated.

YOU'LL BUILD

Clean sheet contains 12 unique enquiries, valid stages and numeric amounts; duplicate/type decisions and invalid-input rejection are evidenced.

TOOLCHAIN

Sheets

DONE WHEN

Clean sheet contains 12 unique enquiries, valid stages and numeric amounts; duplicate/type decisions and invalid-input rejection are evidenced.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Formulas and checks

1

Clean enquiries

one row per ID

2

Stage count

COUNTIF

3

Revenue

SUMIF Won

4

Ratio

Won / total enquiries

RUNTIME AND BOUNDARY

A 25% conversion rate here means Won enquiries divided by all 12 validated enquiries. It does not mean website visitor conversion.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY09 · K6 A5

Contract · Formulas and checks

Field or control	Scenario value	Interpretation
Total enquiries	=COUNTA(A2:A13)	12 validated IDs
Won enquiries	=COUNTIF(C2:C13,"Won")	3 Won records
Won revenue	=SUMIF(C2:C13,"Won",D2:D13)	SGD 960
Conversion	=IF(B2=0,"No data",B3/B2)	Summary B2 total 12; B3 Won 3; result 25%

WHEN IT MATTERS SUMIF matches the stage column and sums the corresponding amount range. Keep both ranges aligned.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Worked artifact · Formulas and checks

Synthetic training artifact; inspect fields and expected values.

Total enquiries = 12
Won enquiries = 3
Won amounts = 360 + 180 + 420
Won revenue = SGD 960
Conversion = 3 / 12 = 25%
All pipeline value = SGD 2820
Average won value = 960 / 3 = SGD 320
Ratio uses enquiries, not page views

Named denominator

A 25% conversion rate here means Won enquiries divided by all 12 validated enquiries. It does not mean website visitor conversion.

Conditional aggregation

SUMIF matches the stage column and sums the corresponding amount range. Keep both ranges aligned.


Empty period

IFERROR avoids a divide error but a displayed zero can hide no data. Display an explicit no-data label in the report.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Decision · Formulas and checks

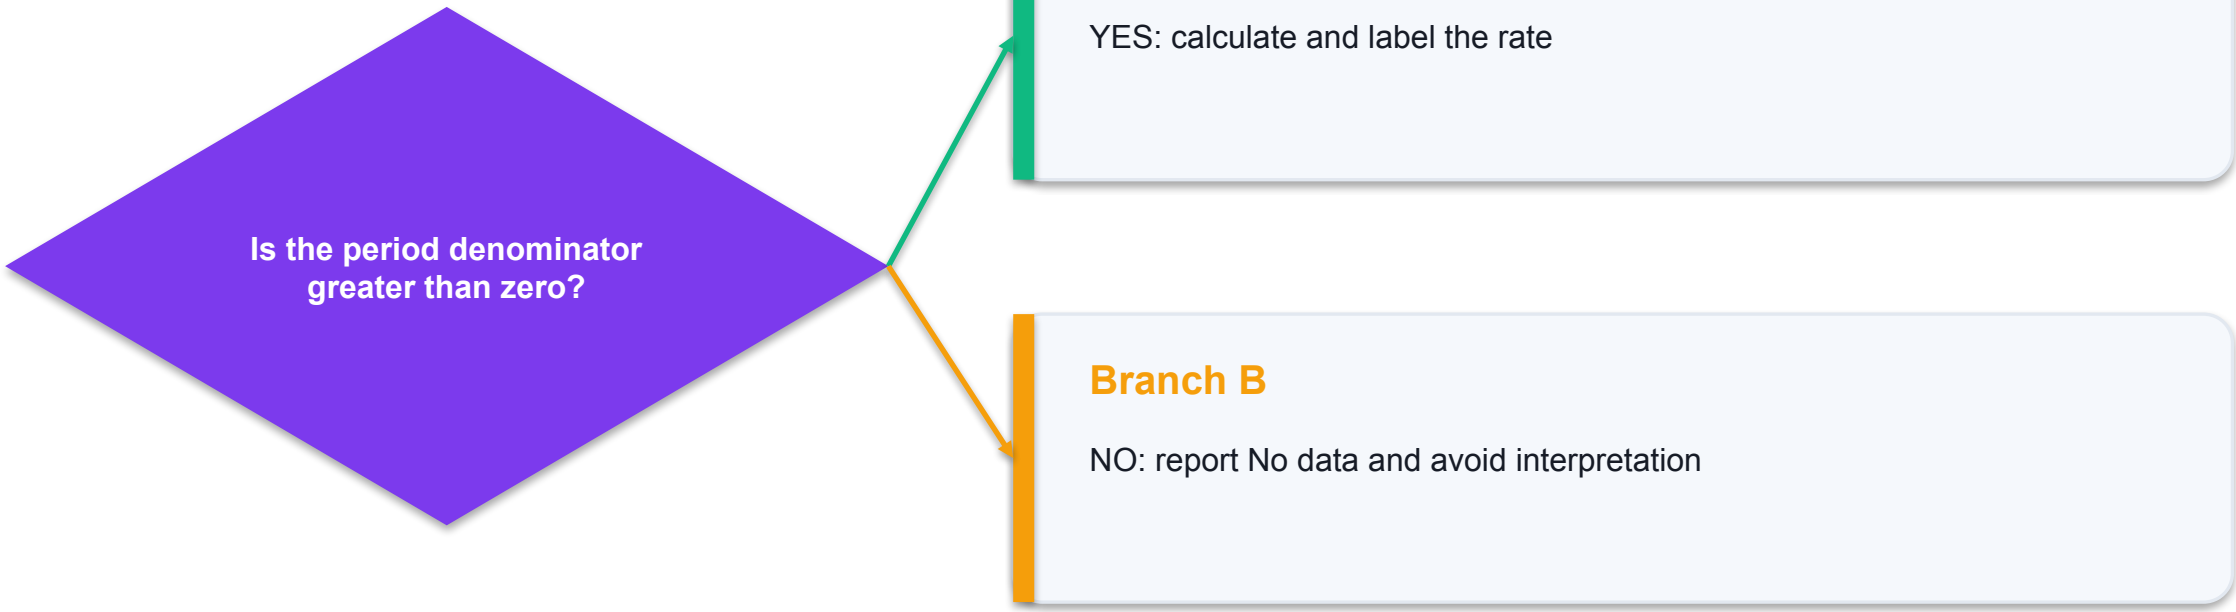

IFERROR avoids a divide error but a displayed zero can hide no data. Display an explicit no-data label in the report.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Fault isolation · Formulas and checks

Observed fault	Mechanism / cause	Corrective check
SUMIF wrong total	Sum range offset from criteria range	Align row 2:13 on both ranges
Conversion exceeds 100%	Numerator and denominator from different populations	Use same validated enquiry cohort
Zero interpreted as failure	Empty period masked by IFERROR	State No data alongside result

WHEN IT MATTERS Independent hand calculation on three won records should match the spreadsheet result before charts are published.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY09 · K6 A5

Control ownership · Formulas and checks

Control point	Responsible actor	Evidence / constraint
Input	Clean validated range	Exclude duplicate/quarantined rows
Formula	Analyst	Label numerator and denominator
Review	Peer reviewer	Recompute three won amounts
Report	Business owner	Avoid unsupported visitor claims

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Acceptance evidence · Formulas and checks

Evidence ID	Observed artifact	Acceptance requirement
COUNT	Unique IDs	12
WON	Stage rows	3
REV	Won revenue	SGD 960
RATE	Won / enquiries	25% with cohort label

WHEN IT MATTERS Total 12, Won 3, Won revenue SGD 960, conversion 25%, average won SGD 320 all match hand calculation and report labels identify the cohort.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Formulas and checks

1

Named denominator

A 25% conversion rate here means Won enquiries divided by all 12 validated enquiries. It does not mean website visitor conversion.

2

Conditional aggregation

SUMIF matches the stage column and sums the corresponding amount range. Keep both ranges aligned.

3

Empty period

IFERROR avoids a divide error but a displayed zero can hide no data. Display an explicit no-data label in the report.

4

Verification

Independent hand calculation on three won records should match the spreadsheet result before charts are published.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY09 · K6 A5

Formulas and checks

ACTIVITY09

25 minutes · Full procedure in Learner Guide and activities/activity-09-sheets-formulas-and-operational-checks

Operations needs the enquiry pipeline value and conversion rate. Compute explicit numerators and denominators rather than relying on an unlabeled percentage.

YOU'LL BUILD

Total 12, Won 3, Won revenue SGD 960, conversion 25%, average won SGD 320 all match hand calculation and report labels identify the cohort.

TOOLCHAIN

Sheets

DONE WHEN


Total 12, Won 3, Won revenue SGD 960, conversion 25%, average won SGD 320 all match hand calculation and report labels identify the cohort.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY10 · K6 A5

Filter views pivots and charts

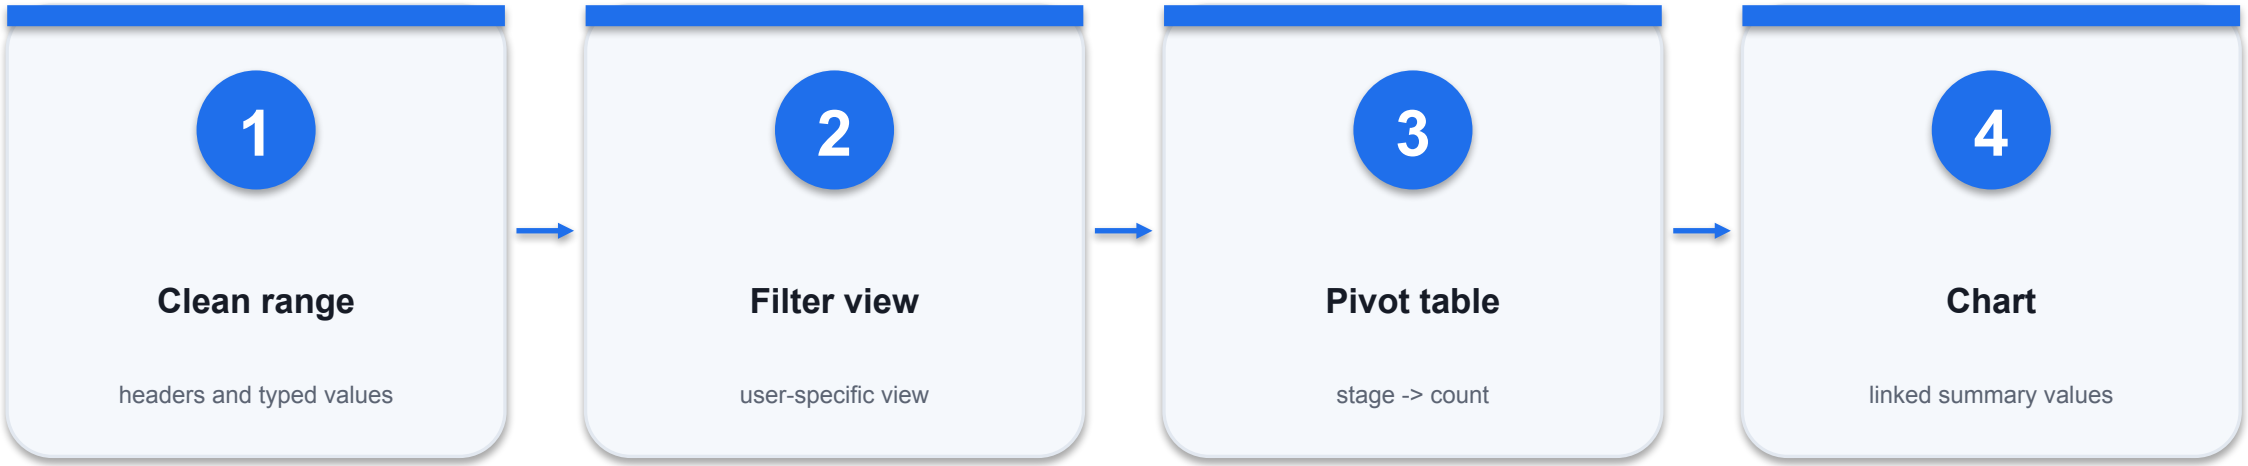

RUNTIME AND BOUNDARY

A filter hides rows in a view; it does not delete them. Verify the source range before interpreting a chart.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY10 · K6 A5

Contract · Filter views pivots and charts

Field or control	Scenario value	Interpretation
Basic filter	Shared sheet view	May change what other users see
Filter view	Saved named view	Does not disrupt another user view
Pivot rows	stage	Group New/Qualified/Won/Lost
Pivot values	COUNTA enquiry_id	Counts records, not amount totals

WHEN IT MATTERS Count of IDs answers how many enquiries; SUM of amount answers pipeline value. These are different measures.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Worked artifact · Filter views pivots and charts

Synthetic training artifact; inspect fields and expected values.

Stage, Enquiry count
New,4
Qualified,3
Won,3
Lost,2
Total,12
Won share = 3/12 =25%
Chart title: Validated enquiry stages

View versus data

A filter hides rows in a view; it does not delete them. Verify the source range before interpreting a chart.

Pivot aggregation

Count of IDs answers how many enquiries; SUM of amount answers pipeline value. These are different measures.


Chart choice

A column chart compares stage counts. A line chart would imply an ordered temporal trend that these categories do not provide.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Decision · Filter views pivots and charts

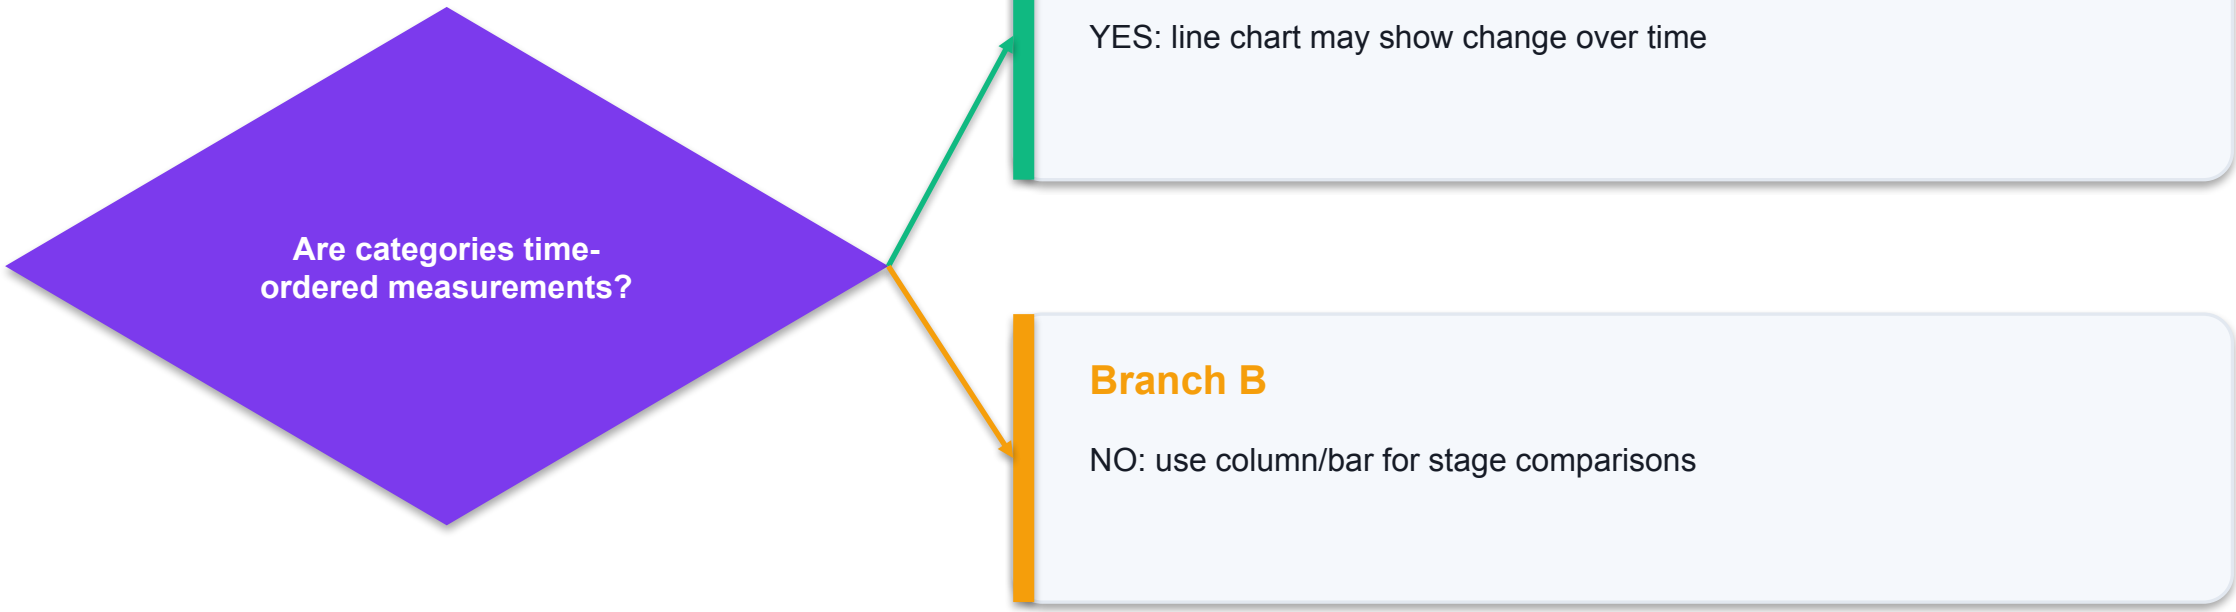

A column chart compares stage counts. A line chart would imply an ordered temporal trend that these categories do not provide.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY10 · K6 A5

Fault isolation · Filter views pivots and charts

Observed fault	Mechanism / cause	Corrective check
Partner loses visible rows	Basic filter applied to shared view	Use a filter view instead
Pivot counts 11	Source range omitted final row	Inspect pivot source range
Won shown as revenue	Wrong measure/title pairing	Label count and currency separately

WHEN IT MATTERS Open the sheet as a second editor and verify a filter view selection does not alter the other editor’s working view.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY10 · K6 A5

Control ownership · Filter views pivots and charts

Control point	Responsible actor	Evidence / constraint
Source	Analyst	Use Clean A1: D13
View	Each user	Named filter view
Aggregation	Peer reviewer	Counts total 12
Visual	Publisher	Correct title and measure

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY10 · K6 A5

Acceptance evidence · Filter views pivots and charts

Evidence ID	Observed artifact	Acceptance requirement
VIEW	Sales qualified	Partner view unaffected
PIVOT	Stage counts	4,3,3,2
TOTAL	Pivot count	12
CHART	Column chart	Counts match source

WHEN IT MATTERS Filter view does not disrupt peer view; pivot counts 4/3/3/2 total 12; chart is editable and correctly labels enquiry counts.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Filter views pivots and charts

1

View versus data

A filter hides rows in a view; it does not delete them. Verify the source range before interpreting a chart.

2

Pivot aggregation

Count of IDs answers how many enquiries; SUM of amount answers pipeline value. These are different measures.

3

Chart choice

A column chart compares stage counts. A line chart would imply an ordered temporal trend that these categories do not provide.

4

Collaboration test

Open the sheet as a second editor and verify a filter view selection does not alter the other editor’s working view.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY10 · K6 A5

Filter views pivots and charts

ACTIVITY10

25 minutes · Full procedure in Learner Guide and activities/activity-10-filter-views-pivots-and-editable-charts

Sales and Operations need different filtered views without disrupting each other. Summarise enquiry stages and visualise counts using the validated 12-row cohort.

YOU'LL BUILD

Filter view does not disrupt peer view; pivot counts 4/3/3/2 total 12; chart is editable and correctly labels enquiry counts.

TOOLCHAIN

Sheets

DONE WHEN

Filter view does not disrupt peer view; pivot counts 4/3/3/2 total 12; chart is editable and correctly labels enquiry counts.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Customer Slides assets

1

Source facts

approved product register

2

Slide layout

title + visual hierarchy

3

Linked chart

source sheet reference

4

Customer copy

audience checked

RUNTIME AND BOUNDARY

Title, image and concise verified values make the decision legible; the source register still governs correctness.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Contract · Customer Slides assets

Field or control	Scenario value	Interpretation
Slide title	Storage that fits your home	Specific customer-facing message
Price field	SGD 29	Matches approved source
Chart period	September 2026 synthetic cohort	Identifies sample context
Source link	Controlled Google Sheet	Viewer access separate from edit

WHEN IT MATTERS A linked Sheets chart is a dependency. A later update needs review before refreshing the customer deck.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Worked artifact · Customer Slides assets

Synthetic training artifact; inspect fields and expected values.

PRESENTATION RELEASE PITCH-01
Slide 1: product and approved SGD 29 price
Slide 2: delivery eligibility and returns
Slide 3: enquiry stages 4/3/3/2
Chart caption: synthetic September cohort
Internal margin: excluded
Release checkpoint: Approved pitch v 1
Customer copy: named training viewer

Visual hierarchy

Title, image and concise verified values make the decision legible; the source register still governs correctness.

Chart dependency

A linked Sheets chart is a dependency. A later update needs review before refreshing the customer deck.

Audience boundary


Sharing a presentation does not necessarily grant the viewer access to every linked source file.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Decision · Customer Slides assets

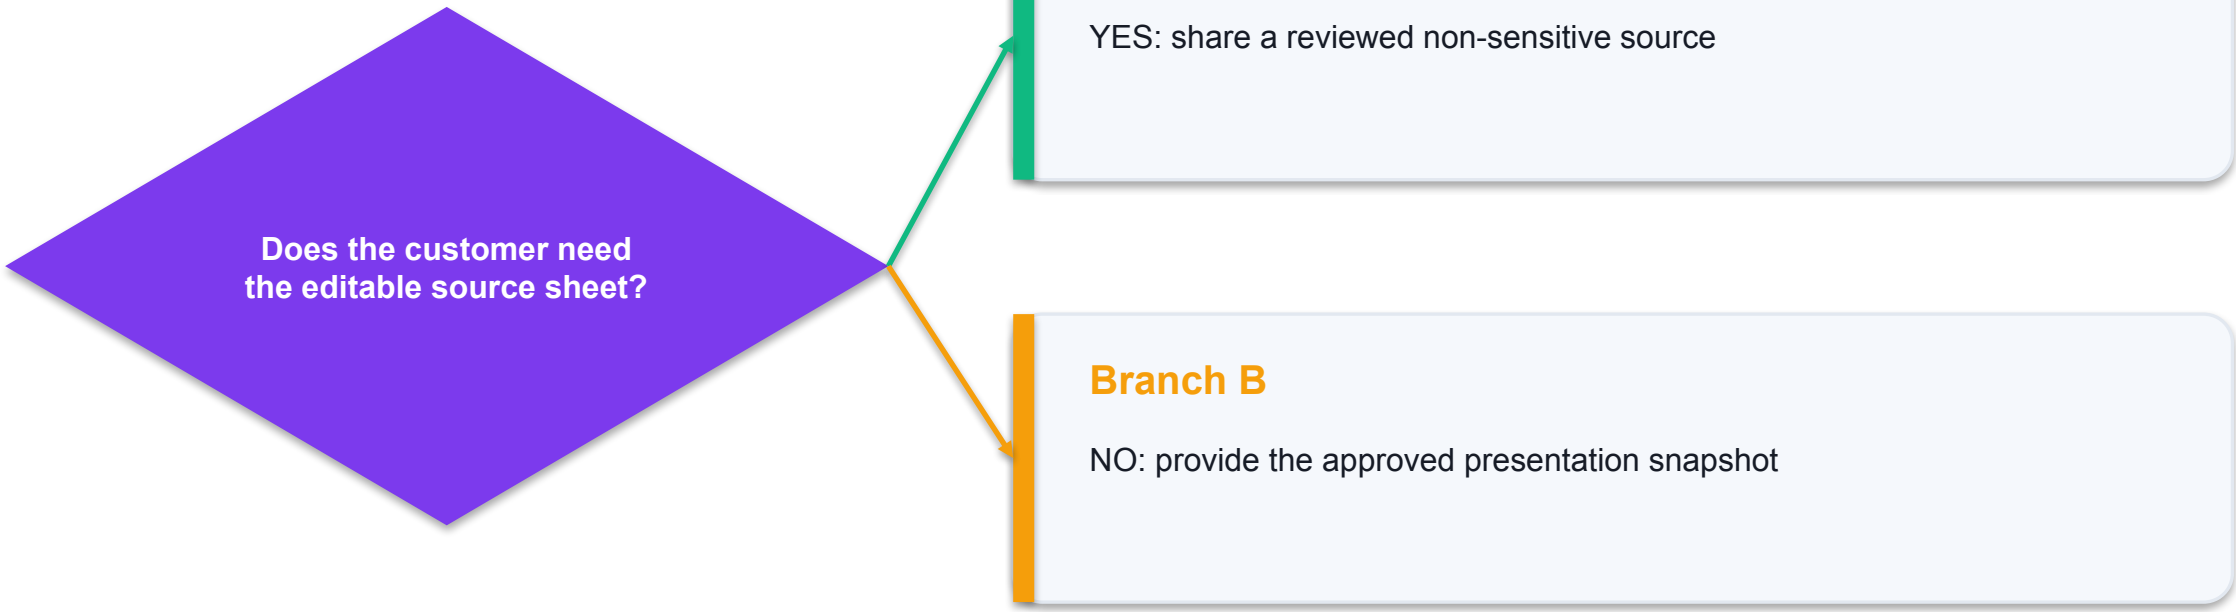

Sharing a presentation does not necessarily grant the viewer access to every linked source file.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Fault isolation · Customer Slides assets

Observed fault	Mechanism / cause	Corrective check
Linked chart out of date	Source changed after insertion	Review current data and refresh deliberately
Customer cannot open source	Source ACL separate	Share approved source or use snapshot
Notes contain internal margin	Source deck reused without release review	Remove private notes and inspect export

WHEN IT MATTERS Remove internal commentary and cost values from the customer copy; inspect the exported PDF and permission state.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Control ownership · Customer Slides assets

Control point	Responsible actor	Evidence / constraint
Facts	Marketing owner	Approve product values
Data	Analyst	Label synthetic period
Layout	Editor	Readable visual hierarchy
Release	Publisher	Viewer/privacy check

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Acceptance evidence · Customer Slides assets

Evidence ID	Observed artifact	Acceptance requirement
PRICE	Customer slide	SGD 29
CHART	Stages	4/3/3/2 with synthetic label
PRIVATE	Notes/comments	No internal cost values
VIEW	PDF/viewer	Readable and accessible

WHEN IT MATTERS Three customer slides use approved facts, clear visual hierarchy and synthetic-data chart label; private cost details are absent and viewer access is verified.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Analysis · Customer Slides assets

1

Visual hierarchy

Title, image and concise verified values make the decision legible; the source register still governs correctness.

2

Chart dependency

A linked Sheets chart is a dependency. A later update needs review before refreshing the customer deck.

3

Audience boundary

Sharing a presentation does not necessarily grant the viewer access to every linked source file.

4

Privacy

Remove internal commentary and cost values from the customer copy; inspect the exported PDF and permission state.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY11 · K2 K4 A3

Customer Slides assets

ACTIVITY11 20 minutes · Full procedure in Learner Guide and activities/activity-11-slides-assets-and-customer-presentation

Marketing needs a short customer presentation containing only approved product facts and a pipeline chart with a clear data period.

YOU'LL BUILD

Three customer slides use approved facts, clear visual hierarchy and synthetic-data chart label; private cost details are absent and viewer access is verified.

TOOLCHAIN

Slides, Sheets, Drive

DONE WHEN


Three customer slides use approved facts, clear visual hierarchy and synthetic-data chart label; private cost details are absent and viewer access is verified.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Forms publishing and consent

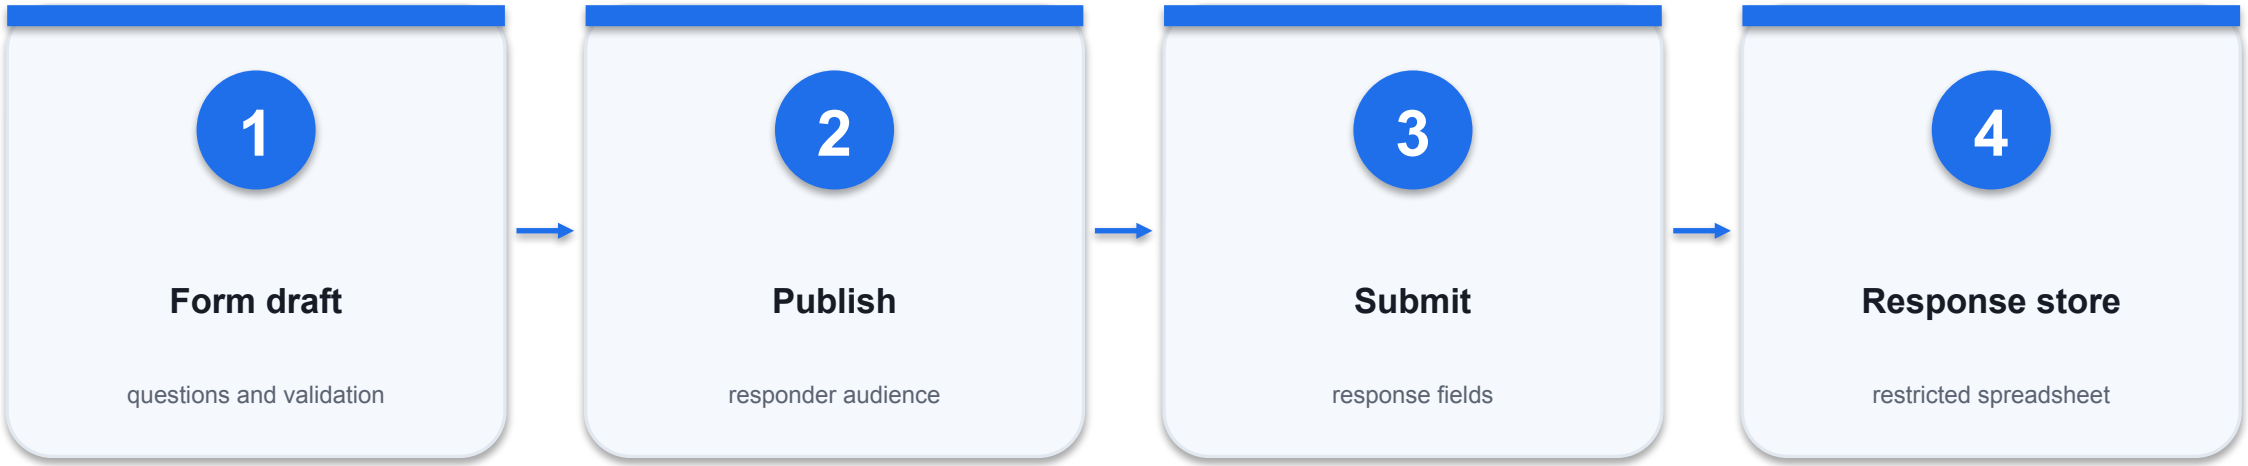

RUNTIME AND BOUNDARY

Current Forms requires publication before responders can access a form. Editor sharing and responder access are separate.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Contract · Forms publishing and consent

Field or control	Scenario value	Interpretation
Question fields	name, email, product, consent	Collect minimum relevant data
Collect email	Verified or responder input	Choose deliberately and disclose
Limit 1 response	Google sign-in required	Not suitable for all anonymous visitors
Summary visibility	View results summary	May reveal full text to responders

WHEN IT MATTERS A one-response limit requires sign-in but does not by itself record the username; email collection is a distinct setting.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Worked artifact · Forms publishing and consent

Synthetic training artifact; inspect fields and expected values.

FORM CONTRACT ENQ-01
product: Storage box / Desk lamp / Shelf
email: responder input for this scenario
consent: required contact permission
response summary: OFF
linked sheet: Restricted staff only
form status: Published to training audience
test response: synthetic@example.invalid

Publish requirement

Current Forms requires publication before responders can access a form. Editor sharing and responder access are separate.

Email collection

A one-response limit requires sign-in but does not by itself record the username; email collection is a distinct setting.

Summary risk


Response summaries can expose full-text answers or charts to responders. Keep summary visibility off for private enquiries.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Decision · Forms publishing and consent

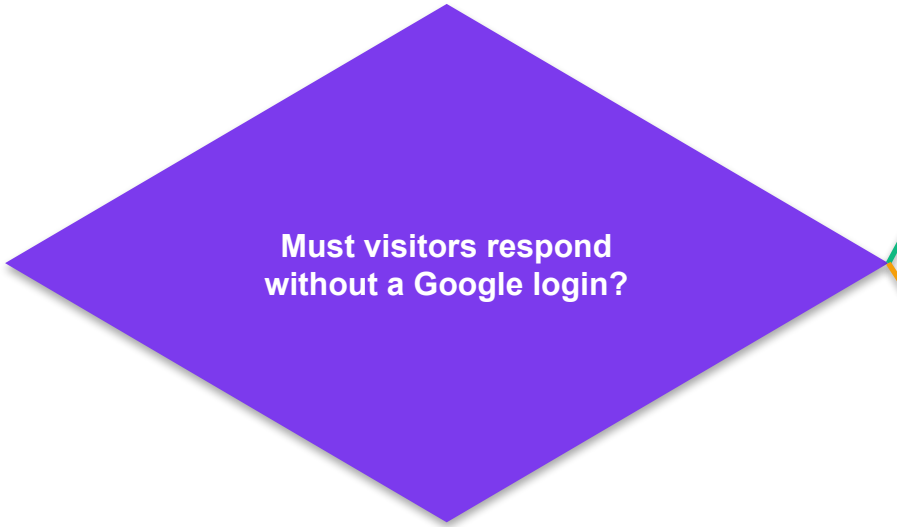

Branch A

YES: avoid sign-in-only response constraints

Branch B

NO: document sign-in requirement and audience

Response summaries can expose full-text answers or charts to responders. Keep summary visibility off for private enquiries.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Fault isolation · Forms publishing and consent

Observed fault	Mechanism / cause	Corrective check
Responder sees unpublished form	Form draft not published	Publish to authorised training responders
Private answers visible	Results summary enabled	Disable summary and retest responder view
External visitor blocked	Audience or sign-in restriction	Align responder controls to intended audience

WHEN IT MATTERS A published enquiry form does not justify publishing the linked response spreadsheet containing customer contact details.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Control ownership · Forms publishing and consent

Control point	Responsible actor	Evidence / constraint
Collection	Form owner	Minimum fields and consent text
Responder access	Publisher	Intended audience only
Response storage	Data owner	Restricted staff sheet
Testing	Separate identity	Submit one synthetic record

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Acceptance evidence · Forms publishing and consent

Evidence ID	Observed artifact	Acceptance requirement
PUB	Responder URL	Published training form opens
CONSENT	Test response	Required contact permission
SUMMARY	Responder view	No private response summary
SHEET	Response spreadsheet	Staff-only Restricted

WHEN IT MATTERS Published responder link works; consent is required; private results summary is off; response sheet stays restricted and synthetic response is correctly captured.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Analysis · Forms publishing and consent

1

Publish requirement

Current Forms requires publication before responders can access a form. Editor sharing and responder access are separate.

2

Email collection

A one-response limit requires sign-in but does not by itself record the username; email collection is a distinct setting.

3

Summary risk

Response summaries can expose full-text answers or charts to responders. Keep summary visibility off for private enquiries.

4

Response ACL

A published enquiry form does not justify publishing the linked response spreadsheet containing customer contact details.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY12 · K2 K3 K4 A3

Forms publishing and consent

ACTIVITY12 25 minutes · Full procedure in Learner Guide and activities/activity-12-forms-publication-consent-and-response-schema

Harbour Home Supplies needs a customer enquiry form. Its responder audience, email collection and response visibility are independent choices with privacy consequences.

YOU'LL BUILD

Published responder link works; consent is required; private results summary is off; response sheet stays restricted and synthetic response is correctly captured.

TOOLCHAIN

Forms, Sheets

DONE WHEN

Published responder link works; consent is required; private results summary is off; response sheet stays restricted and synthetic response is correctly captured.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Feedback validation and analysis



RUNTIME AND BOUNDARY

The 1–5 boundary is part of the question contract; distinguish unanswered from a genuine low score.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Contract · Feedback validation and analysis

Field or control	Scenario value	Interpretation
rating	Integer 1..5	Reject out-of-range input
issue_category	Delivery / Product / Website	Controlled choices
response_id	F001..F010	Unique synthetic record
mean_rating	=AVERAGE(B2:B11)	36/10 =3.6

WHEN IT MATTERS The mean 3.6 uses 10 valid responses. A positive share 60% uses ratings 4 or 5 and the same 10-response denominator.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Worked artifact · Feedback validation and analysis

Synthetic training artifact; inspect fields and expected values.

response_id, rating, issue_category
F001,4, Delivery
F002,3, Website
F003,5, Product
F004,2, Website
ratings:4,3,5,2,4,3,4,5,2,4
sum:36; count:10; mean:3.6
positive ratings >=4:6/10 =60%

Validation

The 1–5 boundary is part of the question contract; distinguish unanswered from a genuine low score.

Aggregation

The mean 3.6 uses 10 valid responses. A positive share 60% uses ratings 4 or 5 and the same 10-response denominator.

Interpretation


Synthetic convenience feedback is evidence for practising analysis, not a verified claim about real customer satisfaction.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Decision · Feedback validation and analysis

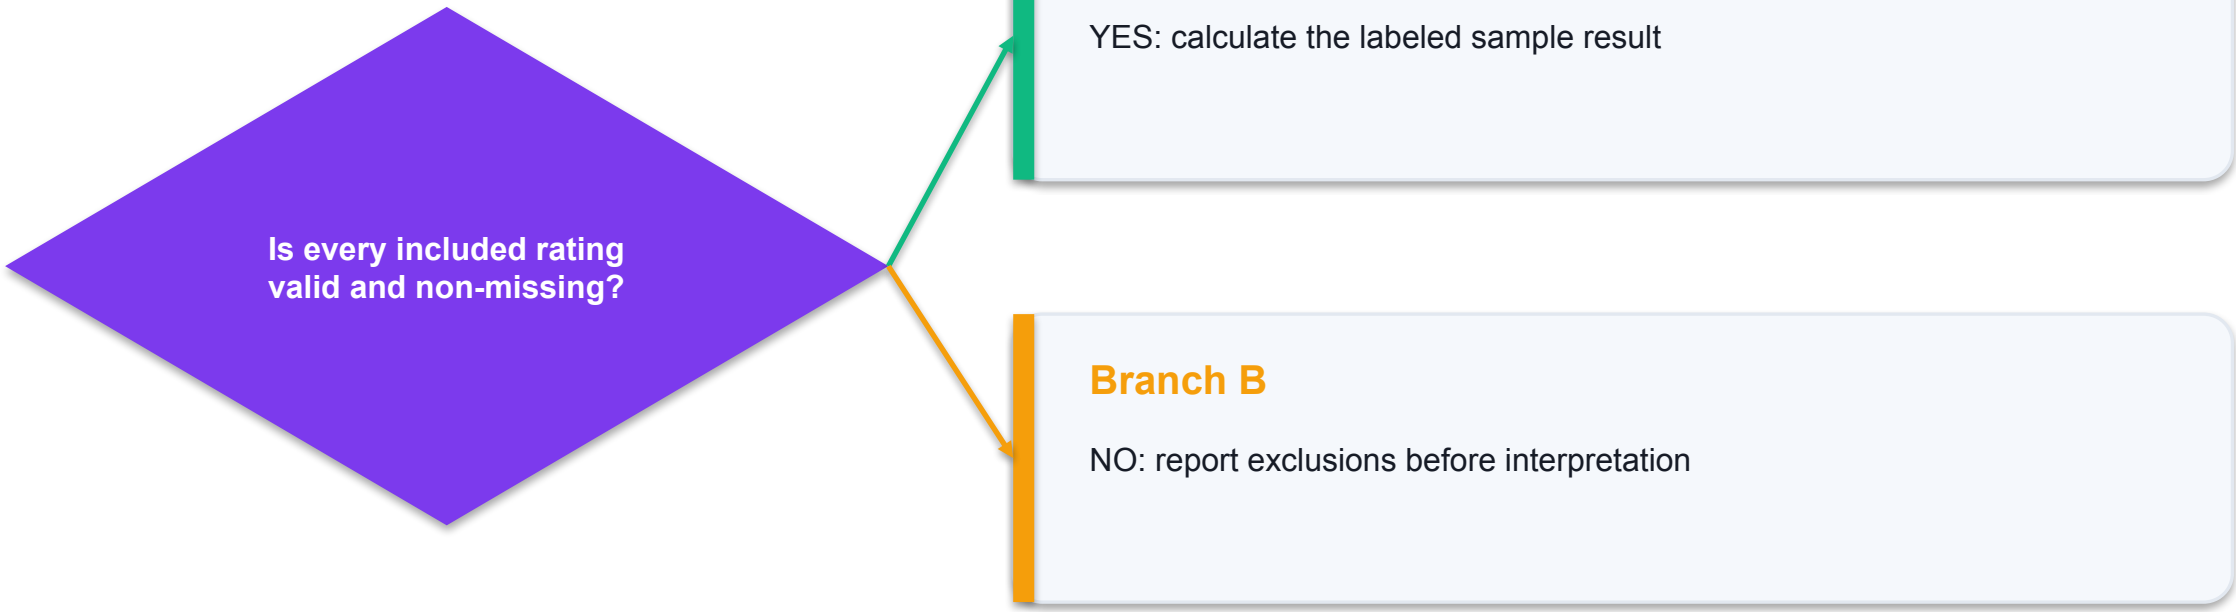

Synthetic convenience feedback is evidence for practising analysis, not a verified claim about real customer satisfaction.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Fault isolation · Feedback validation and analysis

Observed fault	Mechanism / cause	Corrective check
Mean greater than 5	Out-of-range value included	Validate 1..5 and quarantine invalid rows
Blank counted as zero	Missing interpreted as negative feedback	Separate missing from rating 1
60% called customer-wide satisfaction	Sample overgeneralised	Label synthetic 10-response sample

WHEN IT MATTERS Tie the lowest Website scores to a testable navigation improvement and define what evidence would indicate success.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Control ownership · Feedback validation and analysis

Control point	Responsible actor	Evidence / constraint
Input	Rating bounds	Required 1..5 response
Quality	Analyst	Separate invalid/missing rows
Report	Reviewer	State sample size and period
Action	Website owner	Test navigation improvement

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Acceptance evidence · Feedback validation and analysis

Evidence ID	Observed artifact	Acceptance requirement
N	Valid sample	10
MEAN	Rating	3.6/5
POSITIVE	Rating 4 or 5	6/10 =60%
ACTION	Website issue	Navigation test defined

WHEN IT MATTERS Validated 10-response sample has mean 3.6/5 and 6/10 positive ratings; report labels synthetic scope and proposes a measurable website improvement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Feedback validation and analysis

1

Validation

The 1–5 boundary is part of the question contract; distinguish unanswered from a genuine low score.

2

Aggregation

The mean 3.6 uses 10 valid responses. A positive share 60% uses ratings 4 or 5 and the same 10-response denominator.

3

Interpretation

Synthetic convenience feedback is evidence for practising analysis, not a verified claim about real customer satisfaction.

4

Action link

Tie the lowest Website scores to a testable navigation improvement and define what evidence would indicate success.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY13 · K6 K7 A5 A7

Feedback validation and analysis

ACTIVITY13

25 minutes · Full procedure in Learner Guide and activities/activity-13-forms-validation-and-customer-feedback-analysis

A feedback survey contains satisfaction ratings outside 1–5 and missing responses. Validate inputs and interpret the sample without turning a small survey into a population claim.

YOU'LL BUILD

Validated 10-response sample has mean 3.6/5 and 6/10 positive ratings; report labels synthetic scope and proposes a measurable website improvement.

TOOLCHAIN

Forms, Sheets

DONE WHEN


Validated 10-response sample has mean 3.6/5 and 6/10 positive ratings; report labels synthetic scope and proposes a measurable website improvement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Gmail filters and labels

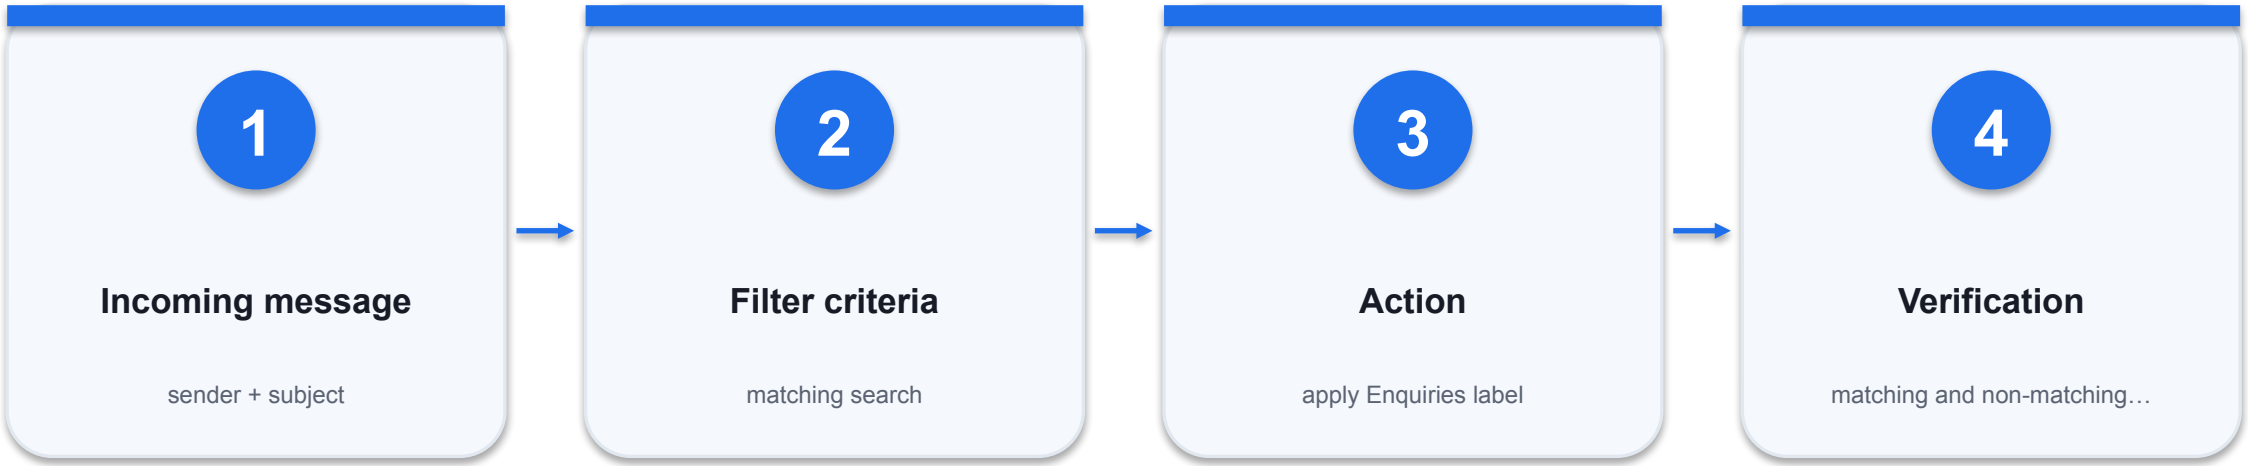

RUNTIME AND BOUNDARY

A filter applies the criteria to messages. A reply without matching fields need not inherit the same filter action.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Contract · Gmail filters and labels

Field or control	Scenario value	Interpretation
Search	subject:(HHS enquiry)	Test matching messages first
Action	Apply label Enquiries	Label need not archive message
Existing messages	Apply filter to matching conversations	Choose explicitly
Reply behaviour	Criteria checked on message	Replies need their own match

WHEN IT MATTERS A label categorises a message without necessarily removing it from Inbox; Archive is a separate action.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Worked artifact · Gmail filters and labels

Synthetic training artifact; inspect fields and expected values.

MESSAGE TEST SET
M01 subject: HHS enquiry storage -> match
M02 subject: Newsletter September -> no match
M03 subject: HHS enquiry lamp -> match
M04 subject: Delivery update -> no match
filter action: Apply Enquiries
automatic forwarding: not used
expected labeled test subjects:2

Matching contract

A filter applies the criteria to messages. A reply without matching fields need not inherit the same filter action.

Labels

A label categorises a message without necessarily removing it from Inbox; Archive is a separate action.

Search before mutation

Preview the exact search matches before saving a routing rule, particularly before forwarding or deletion.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Decision · Gmail filters and labels



Branch A

YES: apply the narrow label rule

Branch B

NO: tighten sender/subject criteria

Preview the exact search matches before saving a routing rule, particularly before forwarding or deletion.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Fault isolation · Gmail filters and labels

Observed fault	Mechanism / cause	Corrective check
Newsletter labeled	Criteria too broad	Preview and narrow subject/sender
Reply not labeled	Reply fails saved criteria	Inspect its actual fields
Old mail unaffected	Existing matching option not selected	Apply explicitly only if intended

WHEN IT MATTERS Automatic forwarding is a data-disclosure action. The training rule applies a local label only.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Control ownership · Gmail filters and labels

Control point	Responsible actor	Evidence / constraint
Criteria	Sales owner	Approves exact match scope
Action	Label	No forwarding/deletion in training
Testing	User	Positive and negative examples
Review	Mailbox owner	Delete obsolete training rule

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Acceptance evidence · Gmail filters and labels

Evidence ID	Observed artifact	Acceptance requirement
MATCH	M01/M03	Enquiries label present
NEGATIVE	M02/M04	Label absent
RULE	Filter action	No forwarding or delete
CLEANUP	Training rule	Removed after evidence

WHEN IT MATTERS Positive and negative message tests match the declared criteria; action is label only and the report distinguishes reply criteria from conversation grouping.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Analysis · Gmail filters and labels

1

Matching contract

A filter applies the criteria to messages. A reply without matching fields need not inherit the same filter action.

2

Labels

A label categorises a message without necessarily removing it from Inbox; Archive is a separate action.

3

Search before mutation

Preview the exact search matches before saving a routing rule, particularly before forwarding or deletion.

4

Privacy boundary

Automatic forwarding is a data-disclosure action. The training rule applies a local label only.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY14 · K3 K5 A3

Gmail filters and labels

ACTIVITY14 20 minutes · Full procedure in Learner Guide and activities/activity-14-gmail-routing-labels-and-search-controls

Sales loses customer enquiries among newsletters. Route only matching messages to a label and verify that a reply is treated according to its own criteria.

YOU'LL BUILD

Positive and negative message tests match the declared criteria; action is label only and the report distinguishes reply criteria from conversation grouping.

TOOLCHAIN

Gmail

DONE WHEN

Positive and negative message tests match the declared criteria; action is label only and the report distinguishes reply criteria from conversation grouping.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Delegation and support replies



RUNTIME AND BOUNDARY

A delegate can manage email, including deleting messages. Grant only to trusted support staff and record review ownership.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Contract · Delegation and support replies

Field or control	Scenario value	Interpretation
Delegate	Named Google account	Mailbox permissions, not password sharing
Allowed	Read, send, delete email	Broad mailbox access
Not allowed	Change owner password	Not a full account takeover
Alias	Alternate email address	Not independent delegatable account

WHEN IT MATTERS An alias is an alternate address, not a separate Google Account. Do not design a delegated mailbox around an alias.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Worked artifact · Delegation and support replies

Synthetic training artifact; inspect fields and expected values.

SUPPORT ACCESS DECISION
mailbox: support@harbour.example
staff: named authorised delegate
shared password: prohibited
alias: sales@harbour.example -> not own account
scope: email management only
offboarding: remove delegation
customer reply template: approved

Delegation scope

A delegate can manage email, including deleting messages. Grant only to trusted support staff and record review ownership.

Account boundary

An alias is an alternate address, not a separate Google Account. Do not design a delegated mailbox around an alias.

Restrictions


Delegation does not grant all non-email integrations or account security controls. Verify the current surface's supported features.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Decision · Delegation and support replies

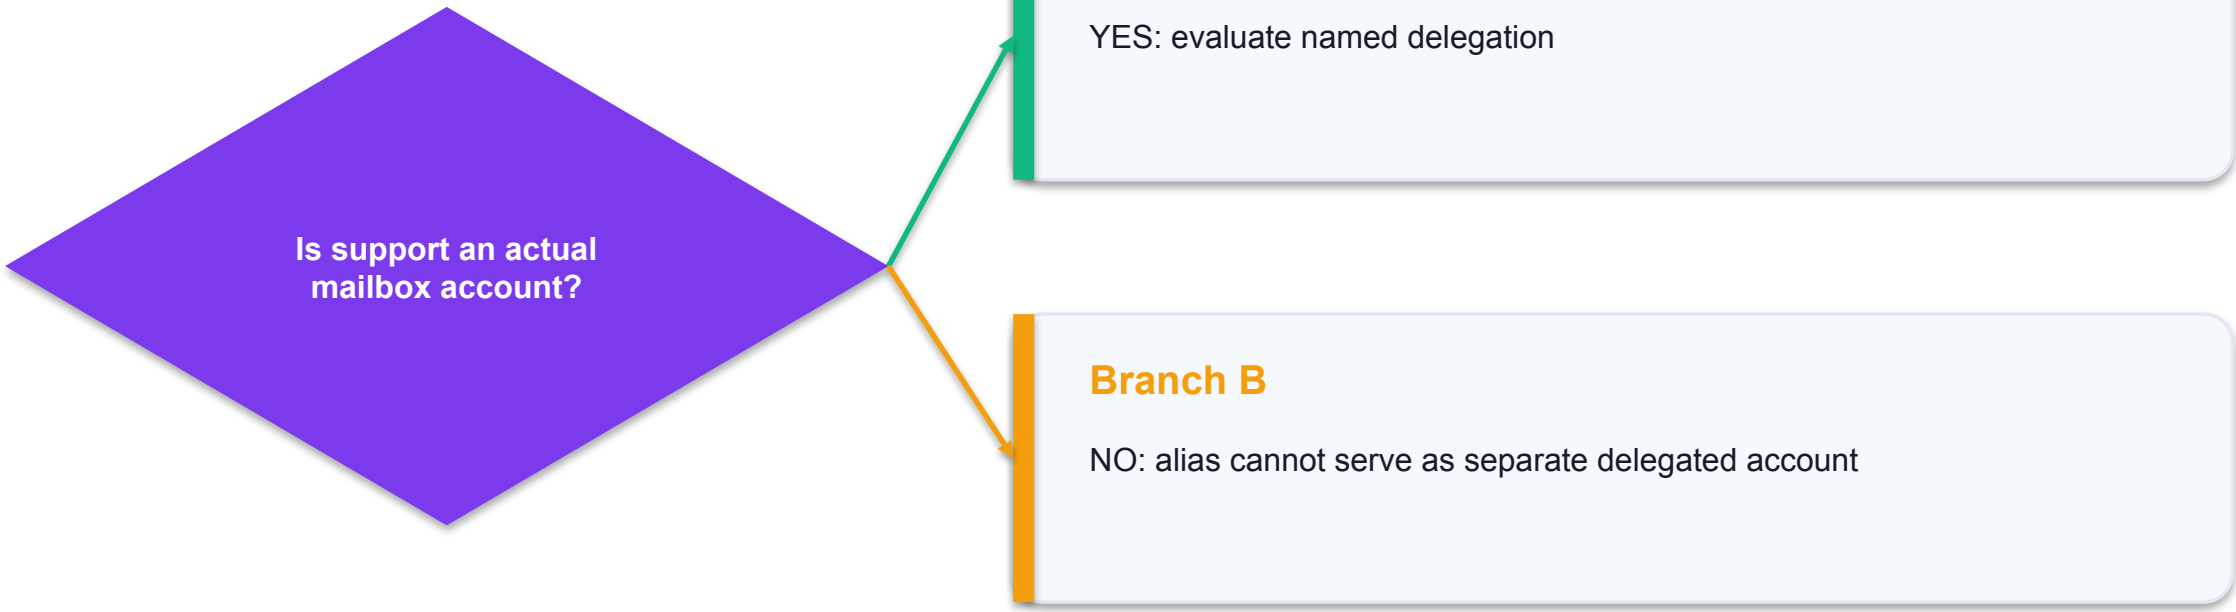

Delegation does not grant all non-email integrations or account security controls. Verify the current surface’s supported features.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Fault isolation · Delegation and support replies

Observed fault	Mechanism / cause	Corrective check
Alias absent from delegated accounts	Alias has no separate mailbox account	Use correct mailbox architecture
Staff uses owner password	Shared credential bypasses accountability	Replace with authorised named access
Delegate retains access after exit	Delegation not revoked	Remove delegation and review grants

WHEN IT MATTERS Use an approved response template and link to current public terms, while keeping personal customer details inside the restricted mailbox.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Control ownership · Delegation and support replies

Control point	Responsible actor	Evidence / constraint
Access grant	Mailbox owner/admin	Named authorised delegate
Response template	Support lead	Verified customer terms
Offboarding	Owner	Remove delegation explicitly
Privacy	Support staff	No unnecessary customer exports

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Acceptance evidence · Delegation and support replies

Evidence ID	Observed artifact	Acceptance requirement
ARCH	Mailbox	Account versus alias identified
SCOPE	Delegate	Read/send/delete documented
REPLY	Template	Correct terms and current links
EXIT	Procedure	Delegation-removal owner named

WHEN IT MATTERS Access design distinguishes mailbox account from alias, documents delegate scope and revocation, and produces a fact-checked customer response without shared credentials.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Analysis · Delegation and support replies

1

Delegation scope

A delegate can manage email, including deleting messages. Grant only to trusted support staff and record review ownership.

2

Account boundary

An alias is an alternate address, not a separate Google Account. Do not design a delegated mailbox around an alias.

3

Restrictions

Delegation does not grant all non-email integrations or account security controls. Verify the current surface’s supported features.

4

Customer handling

Use an approved response template and link to current public terms, while keeping personal customer details inside the restricted mailbox.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY15 · K1 K7 A1 A7

Delegation and support replies

ACTIVITY15 20 minutes · Full procedure in Learner Guide and activities/activity-15-gmail-delegation-and-customer-response-governance

Customer-support staff need access to a shared support mailbox. Sharing the password creates an identity and accountability problem; compare delegation with forwarding or alias use.

YOU'LL BUILD

Access design distinguishes mailbox account from alias, documents delegate scope and revocation, and produces a fact-checked customer response without shared credentials.

TOOLCHAIN

Gmail; delegation demonstration

DONE WHEN


Access design distinguishes mailbox account from alias, documents delegate scope and revocation, and produces a fact-checked customer response without shared credentials.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Calendar availability and booking

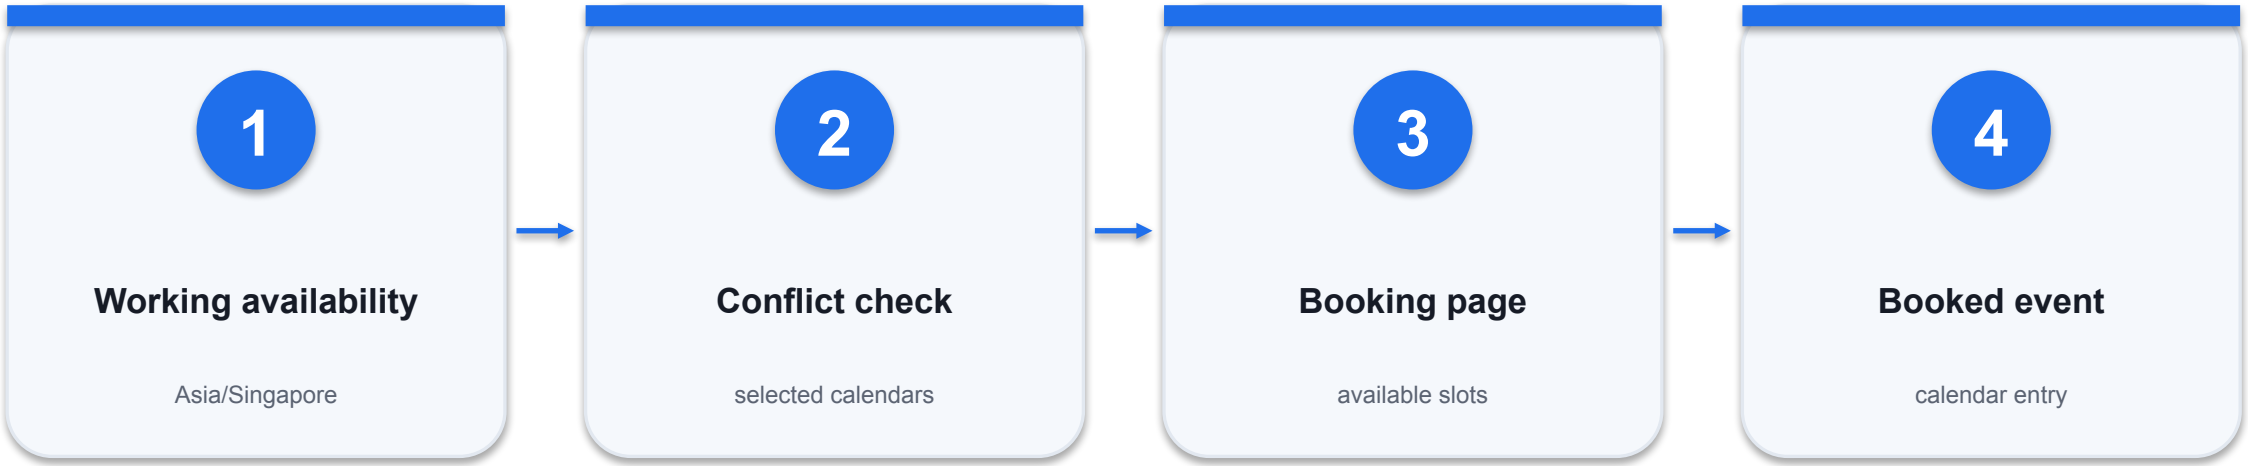

RUNTIME AND BOUNDARY

An absolute instant and display timezone are different. Record timezone explicitly in invitations and customer instructions.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Contract · Calendar availability and booking

Field or control	Scenario value	Interpretation
Time zone	Asia/Singapore UTC+8	Label exported meeting times
Duration	30 minutes	Defined consultation slot
Availability	10:00–12:00 weekdays	Business policy for this scenario
Sharing level	Free/busy where appropriate	Separate from full event details

WHEN IT MATTERS Booking availability reflects configured calendars and busy events. Verify the selected conflict calendars rather than assuming all calendars are checked.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Worked artifact · Calendar availability and booking

Synthetic training artifact; inspect fields and expected values.

BOOKING EXAMPLE
Singapore slot:2026-09-14 10:00 +08:00
UTC equivalent:2026-09-14 02:00Z
Duration:30 min
Busy slot:10:30–11:00 Singapore
Bookable offered slot:11:00 Singapore
Private event title: not shared
Premium booking features: edition check

Time contract

An absolute instant and display timezone are different. Record timezone explicitly in invitations and customer instructions.

Conflicts

Booking availability reflects configured calendars and busy events. Verify the selected conflict calendars rather than assuming all calendars are checked.

Privacy


Free/busy reveals availability without necessarily sharing event titles. Review the calendar's actual permission level.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Decision · Calendar availability and booking

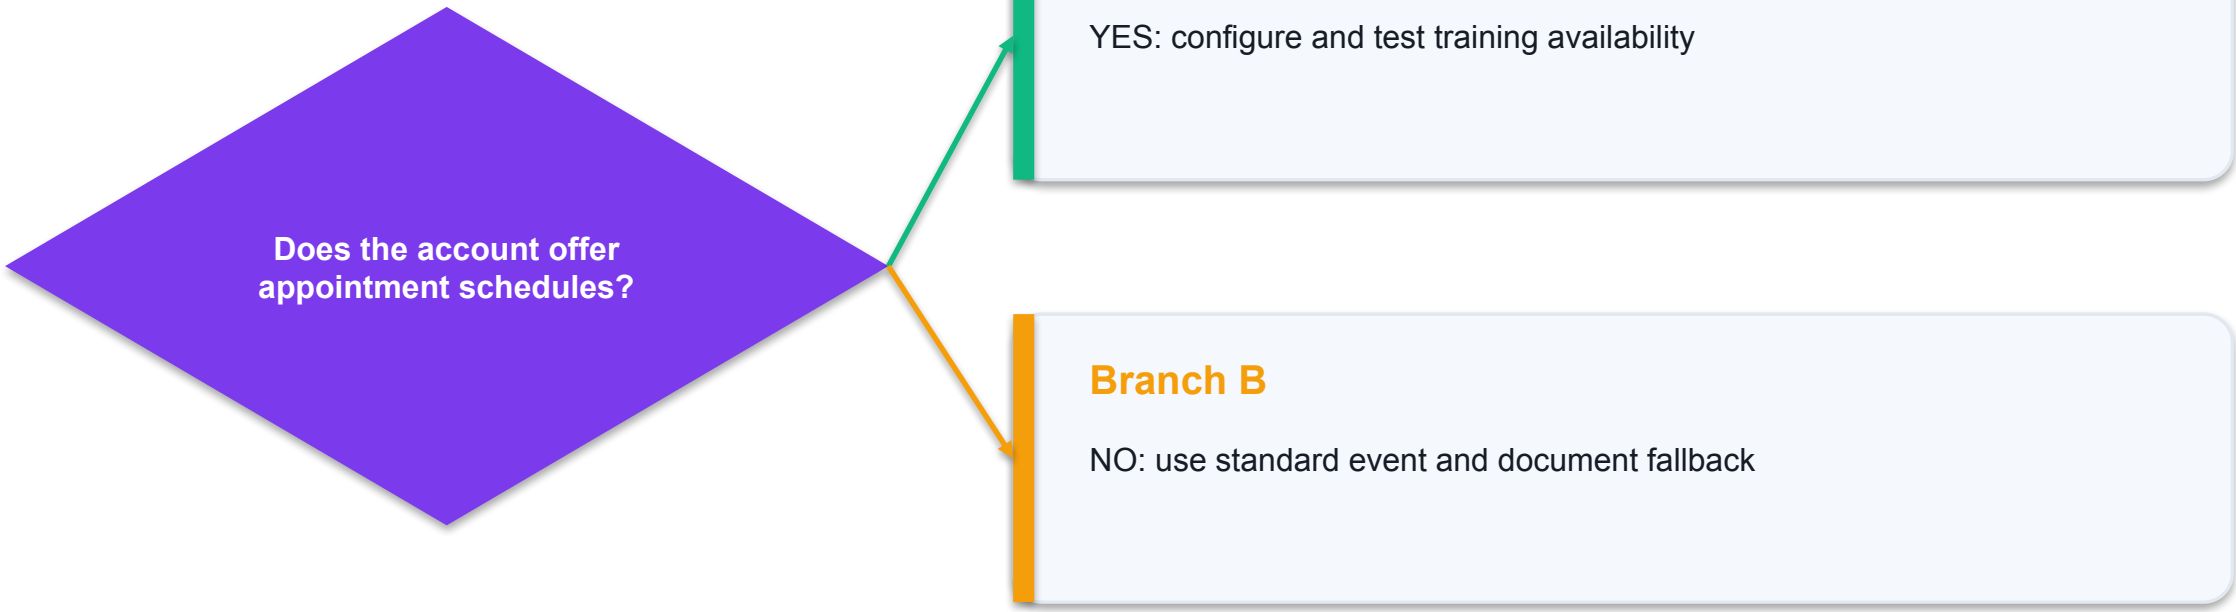

Free/busy reveals availability without necessarily sharing event titles. Review the calendar’s actual permission level.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Fault isolation · Calendar availability and booking

Observed fault	Mechanism / cause	Corrective check
Customer books busy time	Relevant calendar not checked	Review conflict-calendar selection
Meeting shifted 8 hours	Timezone omitted or misread	Compare Singapore and UTC instant
Customer sees private title	Calendar sharing too broad	Choose intended free/busy audience

WHEN IT MATTERS Appointment schedules and premium capabilities depend on account/subscription. A standard event invitation is the classroom fallback.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Control ownership · Calendar availability and booking

Control point	Responsible actor	Evidence / constraint
Schedule owner	Sales lead	Defines duration and hours
Privacy	Calendar owner	Minimum audience visibility
Timezone	Organiser	Labels Singapore/UTC
Test	Customer identity	Verify booking and busy exclusion

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Acceptance evidence · Calendar availability and booking

Evidence ID	Observed artifact	Acceptance requirement
TIME	10:00 +08:00	02:00 UTC same instant
BUSY	10:30–11:00	Excluded where configured
PRIVACY	Viewer	No private titles
BOOK	Training slot	One booking creates expected event

WHEN IT MATTERS Booking route: timezone is correct, configured busy slot is excluded and a test booking creates an event. Standard-event fallback: invitation displays the same Singapore/UTC instant and intended audience; booking checks are explicitly Not executed.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Analysis · Calendar availability and booking

1

Time contract

An absolute instant and display timezone are different. Record timezone explicitly in invitations and customer instructions.

2

Conflicts

Booking availability reflects configured calendars and busy events. Verify the selected conflict calendars rather than assuming all calendars are checked.

3

Privacy

Free/busy reveals availability without necessarily sharing event titles. Review the calendar’s actual permission level.

4

Edition boundary

Appointment schedules and premium capabilities depend on account/subscription. A standard event invitation is the classroom fallback.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY16 · K3 K7 A3 A7

Calendar availability and booking

ACTIVITY16

20 minutes · Full procedure in Learner Guide and activities/activity-16-calendar-availability-and-booking-boundaries

Sales offers consultations to Singapore customers while a partner works in another time zone. An availability link should show bookable slots without exposing private event details.

YOU'LL BUILD

Booking route: timezone is correct, configured busy slot is excluded and a test booking creates an event. Standard-event fallback: invitation displays the same Singapore/UTC instant and intended audience; booking checks are explicitly Not executed.

TOOLCHAIN

Calendar

DONE WHEN


Booking route: timezone is correct, configured busy slot is excluded and a test booking creates an event. Standard-event fallback: invitation displays the same Singapore/UTC instant and intended audience; booking checks are explicitly Not executed.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Meet sharing and decision logs

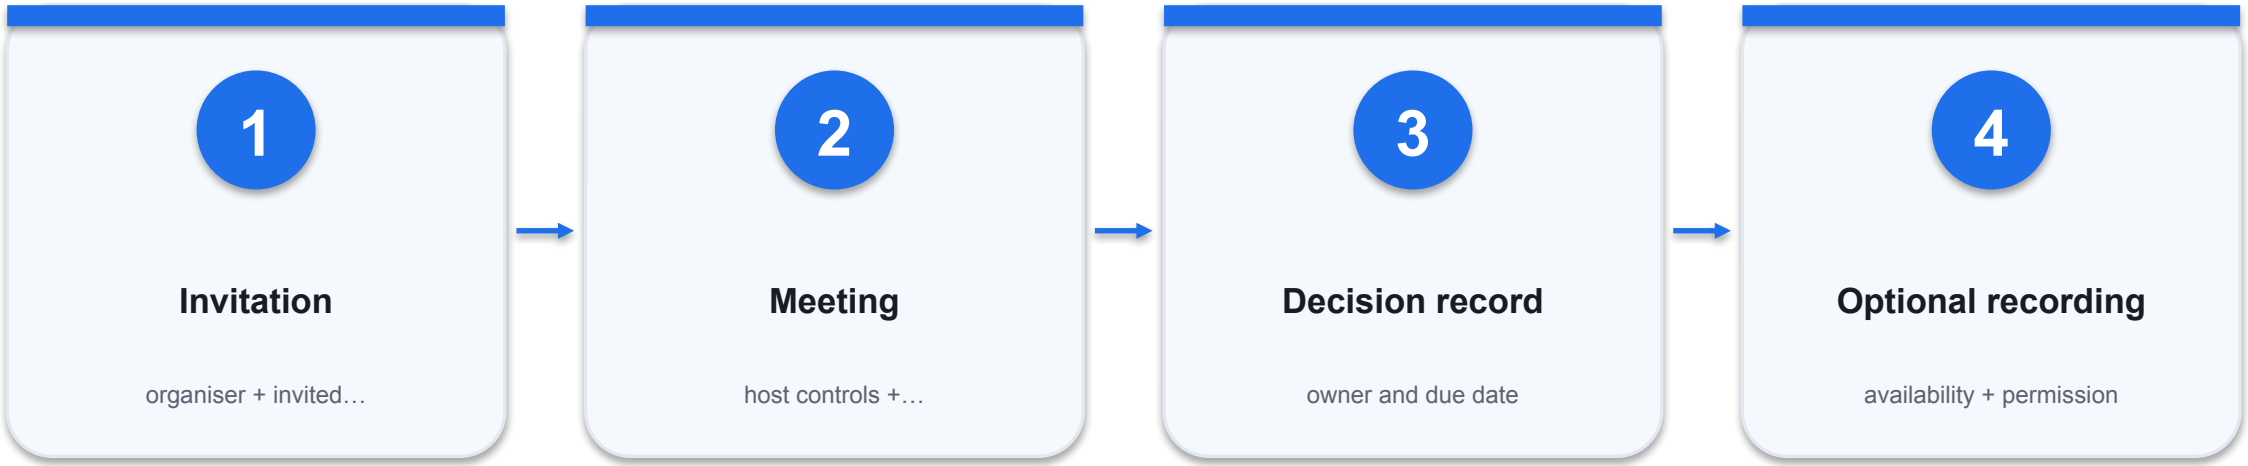

RUNTIME AND BOUNDARY

Meeting controls depend on host, account and administrator settings. Review who can join and present before sharing sensitive content.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Contract · Meet sharing and decision logs

Field or control	Scenario value	Interpretation
Meeting identity	Calendar organiser	Authorised host controls
Screen share	Approved browser tab	Avoid unrelated windows
Recording	Edition/admin/role dependent	Do not assume free availability
Action item	owner, due_on, status	Business decision record

WHEN IT MATTERS Sharing a tab narrows the visible surface compared with an entire screen, but learners still check the content and notifications.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Worked artifact · Meet sharing and decision logs

Synthetic training artifact; inspect fields and expected values.

MEETING DECISIONS MR-01
decision: approve storage-box brochure
owner: Marketing lead
due_on:2026-09-16
status: Open
recording: Not used in core exercise
evidence: written decisions and attendance
shared screen: approved product tab only

Host boundary

Meeting controls depend on host, account and administrator settings. Review who can join and present before sharing sensitive content.

Screen disclosure

Sharing a tab narrows the visible surface compared with an entire screen, but learners still check the content and notifications.

Recording scope


Availability and save location depend on the edition and meeting context. Recording also requires an approved purpose and participant notice.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Decision · Meet sharing and decision logs

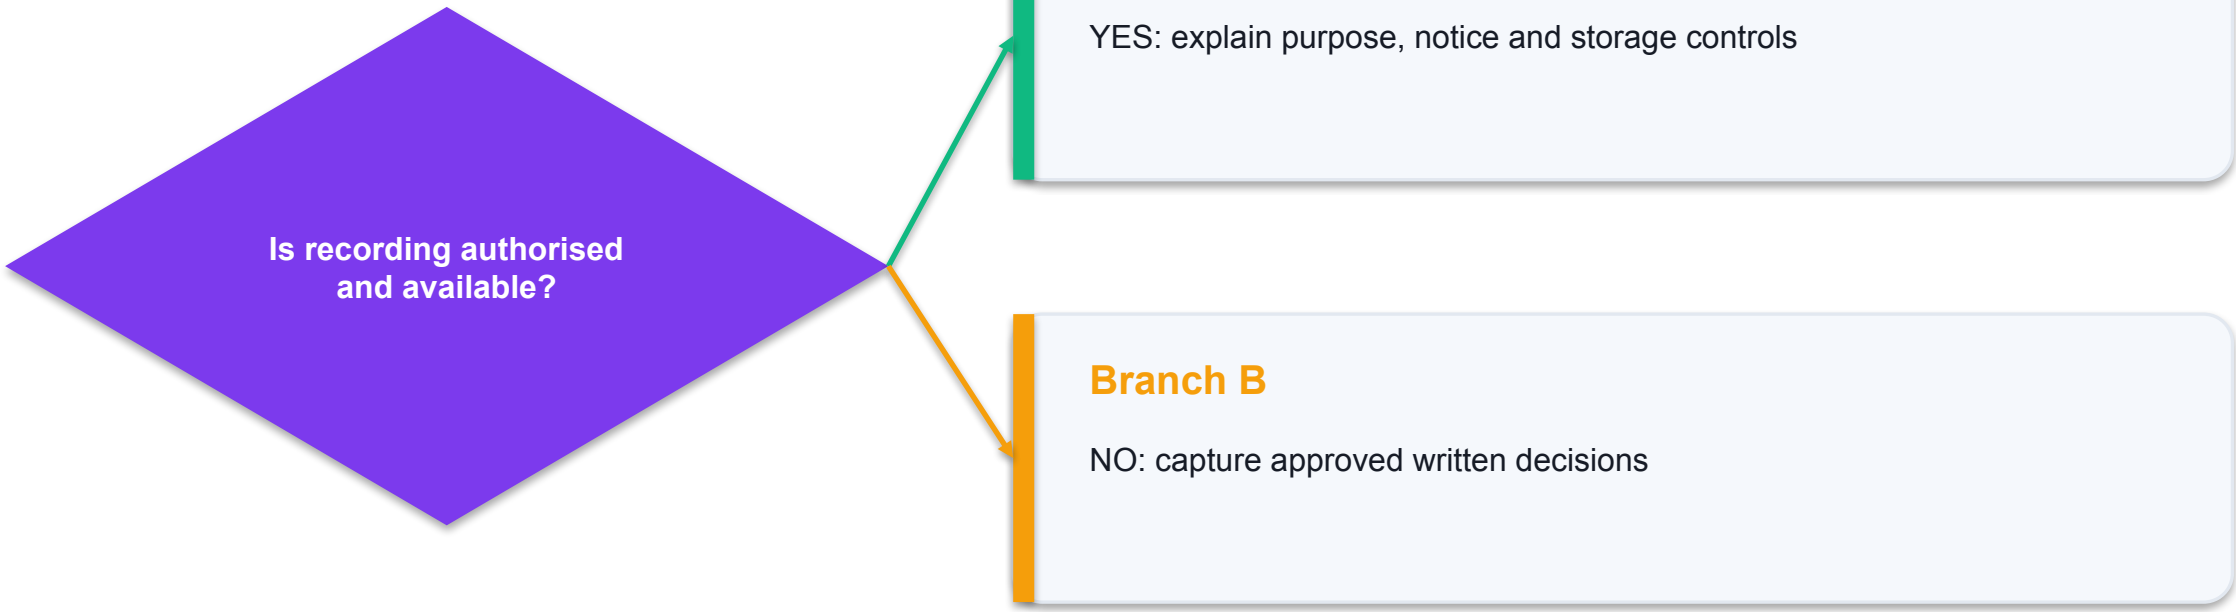

Availability and save location depend on the edition and meeting context. Recording also requires an approved purpose and participant notice.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Fault isolation · Meet sharing and decision logs

Observed fault	Mechanism / cause	Corrective check
Recording control absent	Edition/admin/role limitation	Use written record; note limitation
Customer sees internal window	Wrong share surface	Stop share; select approved tab
Action has no owner	Discussion not translated to work item	Assign owner and due date

WHEN IT MATTERS A written decision/action record is the durable output for this exercise; it is not replaced by an unreviewed recording.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Control ownership · Meet sharing and decision logs

Control point	Responsible actor	Evidence / constraint
Audience	Host	Invite authorised participants
Presentation	Presenter	Approved single tab
Capture	Meeting owner	Purpose/notice/storage review
Follow-up	Action owner	Due date and status update

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Acceptance evidence · Meet sharing and decision logs

Evidence ID	Observed artifact	Acceptance requirement
INVITE	Participants	Intended training audience
SHARE	Visible content	Approved product tab
DECISION	Brochure	Approval and rationale recorded
ACTION	Marketing lead	Due 2026-09-16; Open

WHEN IT MATTERS Approved tab only is shared, written decision and two owned actions persist, and recording limitations/privacy controls are accurately documented.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Analysis · Meet sharing and decision logs

1

Host boundary

Meeting controls depend on host, account and administrator settings. Review who can join and present before sharing sensitive content.

2

Screen disclosure

Sharing a tab narrows the visible surface compared with an entire screen, but learners still check the content and notifications.

3

Recording scope

Availability and save location depend on the edition and meeting context. Recording also requires an approved purpose and participant notice.

4

Decision persistence

A written decision/action record is the durable output for this exercise; it is not replaced by an unreviewed recording.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY17 · K3 K7 A3

Meet sharing and decision logs

ACTIVITY17 20 minutes · Full procedure in Learner Guide and activities/activity-17-meet-collaboration-and-recording-controls

A product-review meeting needs decisions and action owners. Recording and transcripts are not assumed available or appropriate for every account or meeting.

YOU'LL BUILD

Approved tab only is shared, written decision and two owned actions persist, and recording limitations/privacy controls are accurately documented.

TOOLCHAIN

Meet, Calendar, Drive

DONE WHEN

Approved tab only is shared, written decision and two owned actions persist, and recording limitations/privacy controls are accurately documented.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Chat tasks and idea boards



RUNTIME AND BOUNDARY

A space keeps shared discussion context and linked records; the underlying file still has its own sharing settings.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Contract · Chat tasks and idea boards

Field or control	Scenario value	Interpretation
Space membership	Internal training users	Review external audience policy
Thread	Launch decision topic	Keep rationale attached to discussion
Task fields	assignee, due date, status	Record ownership
Whiteboard alternative	Slides brainstorm	Core exercise without third-party licence

WHEN IT MATTERS A task is actionable when an assignee and due date are explicit. Verify completion evidence, not only a chat acknowledgement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Worked artifact · Chat tasks and idea boards

Synthetic training artifact; inspect fields and expected values.

LAUNCH SPACE CONTRACT
topic: September storage-box launch
members: paired training identities
thread: brochure approval
task: review delivery terms
assignee: Operations lead
due:2026-09-16
brainstorm: Slides idea board
Jamboard: retired 31 December 2024

Persistence

A space keeps shared discussion context and linked records; the underlying file still has its own sharing settings.

Task ownership

A task is actionable when an assignee and due date are explicit. Verify completion evidence, not only a chat acknowledgement.

Retired product

Jamboard is end-of-life. Rebuild its original brainstorm purpose with Slides or evaluate current third-party alternatives separately.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Decision · Chat tasks and idea boards



Branch A

YES: evaluate data access, cost and exit

Branch B

NO: use shared Slides brainstorm for core task

Jamboard is end-of-life. Rebuild its original brainstorm purpose with Slides or evaluate current third-party alternatives separately.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Fault isolation · Chat tasks and idea boards

Observed fault	Mechanism / cause	Corrective check
Member cannot open linked brochure	File ACL differs from space	Share approved asset to intended members
Task remains unassigned	Chat message substituted for task	Assign owner and due date
Jamboard link fails	Retired application	Use Slides board; retain exported legacy evidence if available

WHEN IT MATTERS External-space availability depends on administrator policy and space configuration. Keep classroom members internal unless explicitly authorised.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Control ownership · Chat tasks and idea boards

Control point	Responsible actor	Evidence / constraint
Audience	Space manager	Review members and external policy
Assets	File owner	Independent link permission
Tasks	Assignee	Accept due date and update status
Ideas	Facilitator	Tag idea, owner, metric and test

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Acceptance evidence · Chat tasks and idea boards

Evidence ID	Observed artifact	Acceptance requirement
SPACE	Members	Only intended training identities
ASSET	Brochure link	Opens for member
TASK	Terms review	Owner and due date
IDEA	Slides board	Three measurable visitor improvements

WHEN IT MATTERS Persistent discussion or documented fallback, owned task and three measurable ideas exist; no instructions depend on retired Jamboard.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Chat tasks and idea boards

1

Persistence

A space keeps shared discussion context and linked records; the underlying file still has its own sharing settings.

2

Task ownership

A task is actionable when an assignee and due date are explicit. Verify completion evidence, not only a chat acknowledgement.

3

Retired product

Jamboard is end-of-life. Rebuild its original brainstorm purpose with Slides or evaluate current third-party alternatives separately.

4

External boundary

External-space availability depends on administrator policy and space configuration. Keep classroom members internal unless explicitly authorised.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY18 · K3 K7 A3 A7

Chat tasks and idea boards

ACTIVITY18 20 minutes · Full procedure in Learner Guide and activities/activity-18-chat-spaces-tasks-and-whiteboarding-replacement

A product launch needs a persistent discussion space and collaborative ideas. Legacy Jamboard instructions are unusable because the application ended 31 December 2024.

YOU'LL BUILD

Persistent discussion or documented fallback, owned task and three measurable ideas exist; no instructions depend on retired Jamboard.

TOOLCHAIN

Chat, Slides, Tasks if available

DONE WHEN

Persistent discussion or documented fallback, owned task and three measurable ideas exist; no instructions depend on retired Jamboard.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Sites navigation and draft



RUNTIME AND BOUNDARY

The site map names pages and tasks; it is a design artifact, not a broad list of site benefits.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Contract · Sites navigation and draft

Field or control	Scenario value	Interpretation
Page hierarchy	Home, Products, Delivery, Contact	Consistent task-based labels
Primary action	Product enquiry	One visible destination
Draft	Unpublished changes	Review before publishing
Embedded asset	Approved brochure PDF	Viewer ACL checked separately

WHEN IT MATTERS A Sites page can embed a file, but the file's permission remains independent. A visible editor embed is not proof of customer access.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Worked artifact · Sites navigation and draft

Synthetic training artifact; inspect fields and expected values.

SITE MAP HHS-01
Home -> product categories and enquiry action
Products -> three approved product cards
Delivery ->SGD 5 / free above SGD 80
Contact ->published training enquiry form
Footer ->contact and content review date
source catalogue ->approved Drive asset
customer task ->find delivery price in<=2 clicks

Information architecture

The site map names pages and tasks; it is a design artifact, not a broad list of site benefits.

Content dependency

A Sites page can embed a file, but the file's permission remains independent. A visible editor embed is not proof of customer access.

Draft boundary

Editing a published site creates changes requiring publication; distinguish editor preview from current visitor content.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Decision · Sites navigation and draft



Branch A

YES: validate wording and destination access

Branch B

NO: revise navigation and repeat task test

Editing a published site creates changes requiring publication; distinguish editor preview from current visitor content.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Fault isolation · Sites navigation and draft

Observed fault	Mechanism / cause	Corrective check
Viewer sees permission request	Embedded file restricted to editors	Share approved release file appropriately
Terms absent from live site	Draft changes not published	Review and publish current change
Navigation uses internal jargon	Labels reflect departments, not visitor tasks	Use product/delivery/contact task labels

WHEN IT MATTERS Evaluate a visitor's ability to find the delivery price and enquiry action, then record observed completion and friction.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Control ownership · Sites navigation and draft

Control point	Responsible actor	Evidence / constraint
Page owner	Marketing	Maintains facts and review date
Navigation	Website editor	Task-oriented labels
Embed	Source owner	Non-sensitive approved audience
Task test	Visitor tester	Observed<=2 clicks

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Acceptance evidence · Sites navigation and draft

Evidence ID	Observed artifact	Acceptance requirement
MAP	Four pages	Task labels consistent
FACT	Delivery	SGD 5 / threshold SGD 80
EMBED	Brochure	Intended viewer access
TASK	Delivery terms	Located within 2 clicks

WHEN IT MATTERS Four task-oriented pages with approved facts and a documented independent embed ACL exist; delivery terms are discoverable within 2 clicks in the test.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Analysis · Sites navigation and draft

1

Information architecture

The site map names pages and tasks; it is a design artifact, not a broad list of site benefits.

2

Content dependency

A Sites page can embed a file, but the file's permission remains independent. A visible editor embed is not proof of customer access.

3

Draft boundary

Editing a published site creates changes requiring publication; distinguish editor preview from current visitor content.

4

Task test

Evaluate a visitor's ability to find the delivery price and enquiry action, then record observed completion and friction.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY19 · K2 K3 K4 K5 A3

Sites navigation and draft

ACTIVITY19 30 minutes · Full procedure in Learner Guide and activities/activity-19-sites-architecture-navigation-and-draft-content

Customers cannot find delivery terms or the enquiry form on the SME site. Design a small information architecture around actual customer tasks and independent source assets.

YOU'LL BUILD

Four task-oriented pages with approved facts and a documented independent embed ACL exist; delivery terms are discoverable within 2 clicks in the test.

TOOLCHAIN

Sites, Docs, Drive

DONE WHEN


Four task-oriented pages with approved facts and a documented independent embed ACL exist; delivery terms are discoverable within 2 clicks in the test.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Sites release and maintenance

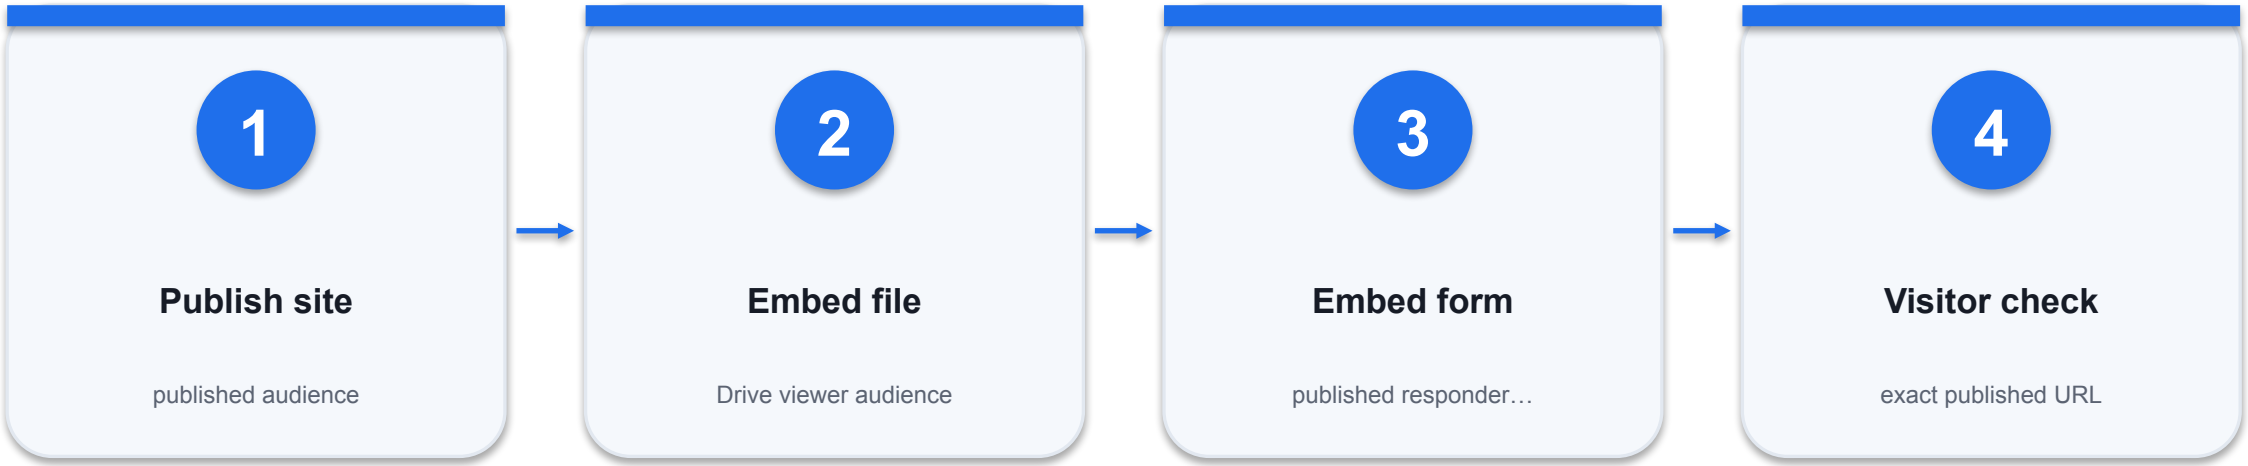

RUNTIME AND BOUNDARY

Site viewers, embedded-file viewers and form responders are separate permission contracts. Align them deliberately.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Contract · Sites release and maintenance

Field or control	Scenario value	Interpretation
Editor URL	Sites editing surface	Not the visitor release URL
Published URL	Published training site	Test current content
Drive embed	File General access + People	Separate ACL
Form embed	Publish + responders	Separate responder contract

WHEN IT MATTERS The form can accept enquiries while its response sheet remains staff-only. Do not grant customers access to the response store.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Worked artifact · Sites release and maintenance

Synthetic training artifact; inspect fields and expected values.

RELEASE MATRIX
site visitor: paired training account
site published: yes
brochure viewer: paired account
form responder: paired account
response sheet: owner only Restricted
mobile navigation: passed
review due:2026-10-13
all 3 audiences intentionally aligned

Three audiences

Site viewers, embedded-file viewers and form responders are separate permission contracts. Align them deliberately.

Response privacy

The form can accept enquiries while its response sheet remains staff-only. Do not grant customers access to the response store.

Maintenance cycle

Check content facts, broken links, mobile layout, audience and review dates. Record findings and corrective action for each item.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Decision · Sites release and maintenance



Branch A

YES: record release and next review

Branch B

NO: fix the failed site/file/form contract

Check content facts, broken links, mobile layout, audience and review dates. Record findings and corrective action for each item.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Fault isolation · Sites release and maintenance

Observed fault	Mechanism / cause	Corrective check
Site opens; brochure denied	Drive embed ACL excludes visitor	Share approved file with intended audience
Form not accepting visitor	Form unpublished or responder restricted	Publish/align responder audience
Response data exposed	Response sheet broadened with site	Restrict response store separately

WHEN IT MATTERS Open the exact published URL with the intended viewer. Editor preview does not establish current visitor behaviour.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Control ownership · Sites release and maintenance

Control point	Responsible actor	Evidence / constraint
Site	Publisher	Approved training audience
Brochure	File owner	Approved non-sensitive audience
Form	Form owner	Published responder access
Responses	Data owner	Restricted staff access

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Acceptance evidence · Sites release and maintenance

Evidence ID	Observed artifact	Acceptance requirement
SITE	Published URL	Current facts visible
FILE	Embed	Viewer opens brochure
FORM	Responder	Synthetic submission succeeds
PRIVATE	Response sheet	Uninvited visitor denied

WHEN IT MATTERS Exact published site, brochure and form work for intended viewer; response sheet denies unauthorised access and maintenance checklist has resolved findings.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Analysis · Sites release and maintenance

1

Three audiences

Site viewers, embedded-file viewers and form responders are separate permission contracts. Align them deliberately.

2

Response privacy

The form can accept enquiries while its response sheet remains staff-only. Do not grant customers access to the response store.

3

Maintenance cycle

Check content facts, broken links, mobile layout, audience and review dates. Record findings and corrective action for each item.

4

Live verification

Open the exact published URL with the intended viewer. Editor preview does not establish current visitor behaviour.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY20 · K3 K4 A3

Sites release and maintenance

ACTIVITY20 30 minutes · Full procedure in Learner Guide and activities/activity-20-sites-publishing-embed-access-and-maintenance

The editor sees a brochure and form correctly, but a customer gets permission errors. Validate site publication, responder access and embedded file sharing as separate controls.

YOU'LL BUILD

Exact published site, brochure and form work for intended viewer; response sheet denies unauthorised access and maintenance checklist has resolved findings.

TOOLCHAIN

Sites, Drive, Forms

DONE WHEN

Exact published site, brochure and form work for intended viewer; response sheet denies unauthorised access and maintenance checklist has resolved findings.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY21 · K8 A4

CMS weighted selection



RUNTIME AND BOUNDARY

The scores are an explicit fictional analyst judgement. They are not current market statistics or universal product rankings.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY21 · K8 A4

Contract · CMS weighted selection

Field or control	Scenario value	Interpretation
Criteria weights	Ease 30, Public 25, Governance 25, Extension 20	Sum 100 in scenario
Score scale	1..5	Learner analysis, not vendor benchmark
Google Sites	Simple team/site authoring	Assess against required workflow
Other offerings	WordPress / SharePoint	Verify roles and deployment context

WHEN IT MATTERS Google Sites is a site builder within Workspace; Docs/Drive manage collaboration assets. Do not imply it supplies every workflow of a dedicated CMS.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY21 · K8 A4

Worked artifact · CMS weighted selection

Synthetic training artifact; inspect fields and expected values.

SYNTHETIC SELECTION MATRIX
criterion, weight, Sites, WordPress, SharePoint
Ease,30,5,3,3
Public publishing,25,4,5,2
Governance,25,3,3,5
Extensions,20,2,5,4
weighted Sites:365/100=3.65
WordPress:390/100=3.90
SharePoint:345/100=3.45

Scenario scores

The scores are an explicit fictional analyst judgement. They are not current market statistics or universal product rankings.

CMS boundary

Google Sites is a site builder within Workspace; Docs/Drive manage collaboration assets. Do not imply it supplies every workflow of a dedicated CMS.

WordPress roles

WordPress provides role/capability controls; hosting, updates and plugins introduce operational responsibilities that must be assigned.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Decision · CMS weighted selection



Branch A

YES: evaluate dedicated CMS operations and costs

Branch B

NO: simple Sites workflow may satisfy requirements

WordPress provides role/capability controls; hosting, updates and plugins introduce operational responsibilities that must be assigned.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY21 · K8 A4

Fault isolation · CMS weighted selection

Observed fault	Mechanism / cause	Corrective check
Weights total 110	Scoring arithmetic invalid	Normalise weights to 100
Vendor brochure treated as proof	Feature claim lacks contract source	Read official roles/permission documentation
High score hides unmet hard constraint	Weighted average masks mandatory need	Apply must-have gate before ranking

WHEN IT MATTERS SharePoint sharing and modern site permissions support Microsoft 365 collaboration; validate the audience and tenant configuration for the actual use case.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY21 · K8 A4

Control ownership · CMS weighted selection

Control point	Responsible actor	Evidence / constraint
Requirements	Business owner	Must-have audience/workflow
Evidence	Analyst	Primary documentation + date
Scores	Review team	Scenario rationale and weights
Decision	Sponsor	Cost, risks and exit plan

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Acceptance evidence · CMS weighted selection

Evidence ID	Observed artifact	Acceptance requirement
WEIGHTS	Matrix	30+25+25+20=100
MATH	Sites score	3.65
SOURCES	Offerings	Official links/date documented
GATE	Must-have	Failure excludes unsuitable option

WHEN IT MATTERS Comparison covers Google Sites plus 2 offerings with dated primary sources, weights 100, correct 3.65/3.90/3.45 scores and a mandatory-constraint decision.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · CMS weighted selection

1

Scenario scores

The scores are an explicit fictional analyst judgement. They are not current market statistics or universal product rankings.

2

CMS boundary

Google Sites is a site builder within Workspace; Docs/Drive manage collaboration assets. Do not imply it supplies every workflow of a dedicated CMS.

3

WordPress roles

WordPress provides role/capability controls; hosting, updates and plugins introduce operational responsibilities that must be assigned.

4

SharePoint permissions

SharePoint sharing and modern site permissions support Microsoft 365 collaboration; validate the audience and tenant configuration for the actual use case.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY21 · K8 A4

CMS weighted selection

ACTIVITY21 25 minutes · Full procedure in Learner Guide and activities/activity-21-cms-market-offerings-and-weighted-selection

An SME choosing between Google Sites, WordPress and SharePoint needs a documented content-management decision, including audience, editing workflow, integrations and operational ownership.

YOU'LL BUILD

Comparison covers Google Sites plus 2 offerings with dated primary sources, weights 100, correct 3.65/3.90/3.45 scores and a mandatory-constraint decision.

TOOLCHAIN

Sheets, browser research

DONE WHEN

Comparison covers Google Sites plus 2 offerings with dated primary sources, weights 100, correct 3.65/3.90/3.45 scores and a mandatory-constraint decision.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

TOPIC3 · LO3


Metrics add-ons and integration decisions

K5 K6 K7 K9 A2 A5 A6 A7

© Tertiary Infotech Academy Pte Ltd

ACTIVITY22 · K6 A5

Metrics and provenance

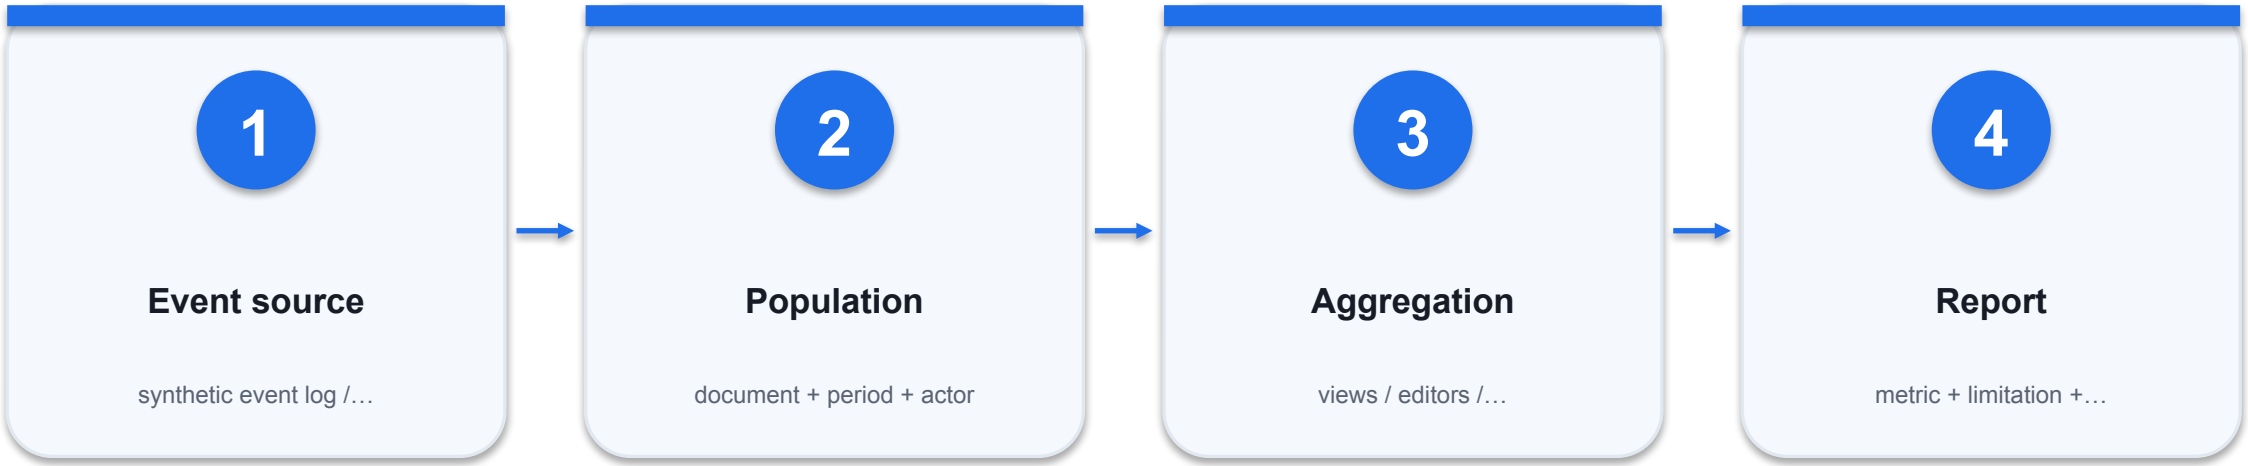

RUNTIME AND BOUNDARY

Define event, population and denominator. View frequency counts events; unique viewers deduplicate identities; these answer different questions.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY22 · K6 A5

Contract · Metrics and provenance

Field or control	Scenario value	Interpretation
View events	action=view per document	Event count is not unique visitors
Unique viewers	distinct actor_id for views	Synthetic stable identifiers
Collaboration rate	docs with>=2 editors / edited docs	Defined business measure
Data provenance	Synthetic mock / live admin report	State source and availability

WHEN IT MATTERS Core activity uses synthetic event data. Live Admin reports require authorised roles and feature availability; they are a separately demonstrated source.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY22 · K6 A5

Worked artifact · Metrics and provenance

Synthetic training artifact; inspect fields and expected values.

MONTHLY METRIC CONTRACT
period: September 2026 training sample
DOC01 views 24; editors 3
DOC02 views 18; editors 2
DOC03 views 12; editors 1
DOC04 views 6; editors 1
total view events 60
collaborative docs 2/4 =50%
unique-viewer counts need actor IDs

Metric definition

Define event, population and denominator. View frequency counts events; unique viewers deduplicate identities; these answer different questions.

Provenance

Core activity uses synthetic event data. Live Admin reports require authorised roles and feature availability; they are a separately demonstrated source.


Collaboration rule

Our 50% rate means two of four edited documents have at least two distinct editors. It is a business-defined measure, not a guaranteed built-in report label.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Decision · Metrics and provenance

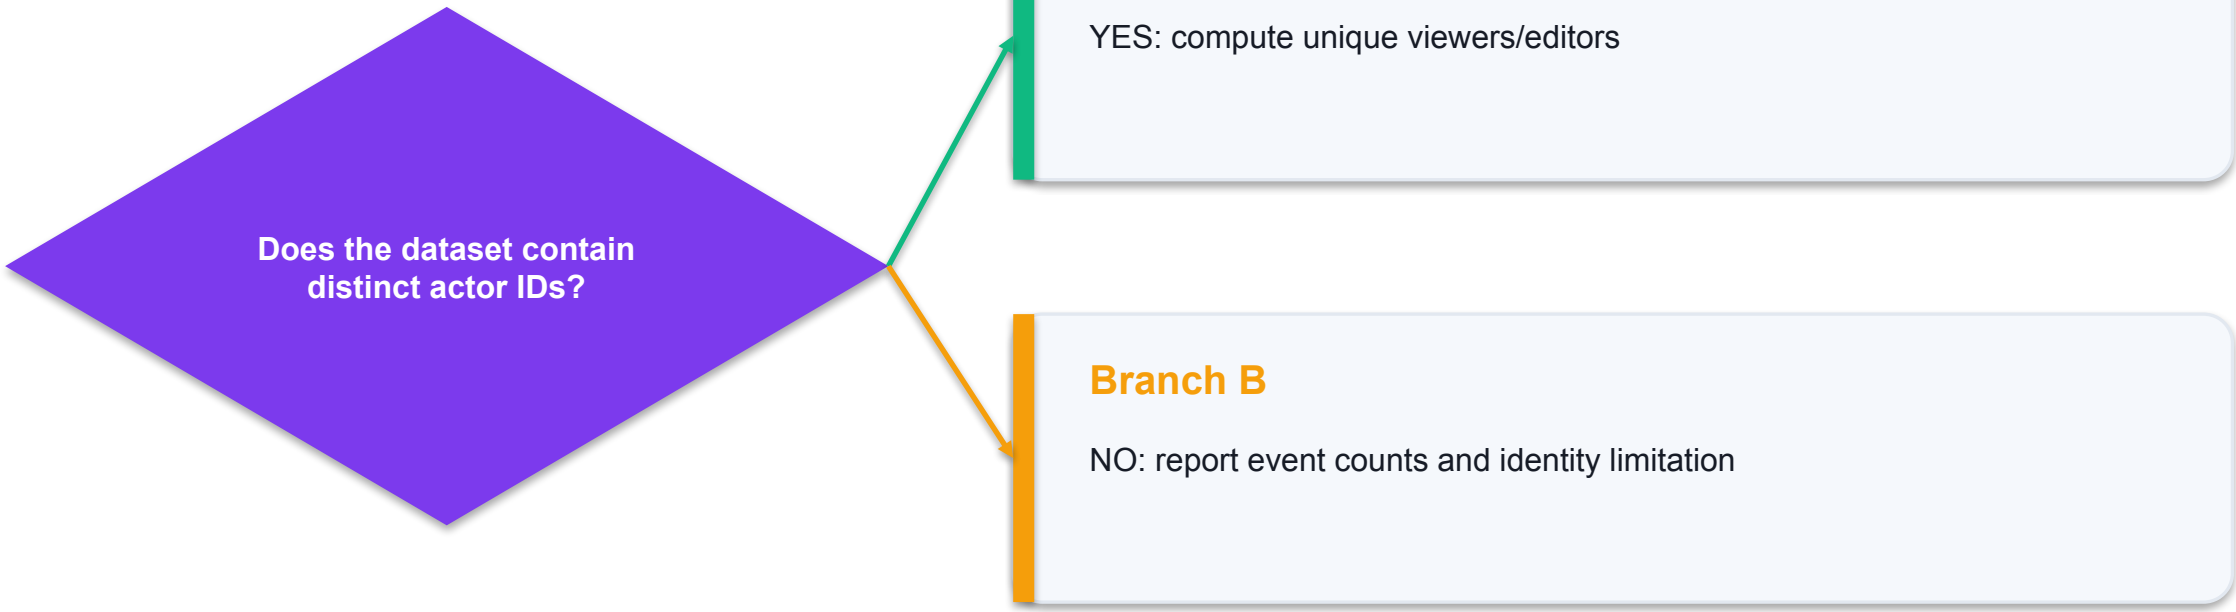

Our 50% rate means two of four edited documents have at least two distinct editors. It is a business-defined measure, not a guaranteed built-in report label.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY22 · K6 A5

Fault isolation · Metrics and provenance

Observed fault	Mechanism / cause	Corrective check
Views called customers	Repeated/internal events misclassified	Label view events and source population
Collaboration denominator wrong	All assets included instead of edited docs	Use the defined 4 edited-doc cohort
Admin metric unavailable	Role/edition/report limitation	Use labelled synthetic data; record gap

WHEN IT MATTERS High access is not automatically success. Pair a measurable user task or enquiry outcome with content activity and note source limitations.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY22 · K6 A5

Control ownership · Metrics and provenance

Control point	Responsible actor	Evidence / constraint
Source	Analyst	Label synthetic or verified live
Identity	Data owner	Use pseudonymous actor IDs
Definition	Business owner	Approve numerator/denominator
Reporting	Reviewer	Check totals and limitations

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY22 · K6 A5

Acceptance evidence · Metrics and provenance

Evidence ID	Observed artifact	Acceptance requirement
VIEWS	DOC01..04	24+18+12+6=60
EDITORS	DOC01..04	3,2,1,1
COLLAB	>=2 editors	2/4=50%
SOURCE	Report	Synthetic explicitly stated

WHEN IT MATTERS Report correctly shows 60 view events and 50% defined collaboration across 4 edited docs, with explicit synthetic source, population and limitation notes.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Metrics and provenance

1

Metric definition

Define event, population and denominator. View frequency counts events; unique viewers deduplicate identities; these answer different questions.

2

Provenance

Core activity uses synthetic event data. Live Admin reports require authorised roles and feature availability; they are a separately demonstrated source.

3

Collaboration rule

Our 50% rate means two of four edited documents have at least two distinct editors. It is a business-defined measure, not a guaranteed built-in report label.

4

Interpretation

High access is not automatically success. Pair a measurable user task or enquiry outcome with content activity and note source limitations.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY22 · K6 A5

Metrics and provenance

ACTIVITY22 30 minutes · Full procedure in Learner Guide and activities/activity-22-workspace-metrics-and-evidence-provenance

The original practical assessment requests document access frequency, collaboration rate and engagement. Report defined measures from labelled synthetic events without claiming unavailable tenant telemetry.

YOU'LL BUILD

Report correctly shows 60 view events and 50% defined collaboration across 4 edited docs, with explicit synthetic source, population and limitation notes.

TOOLCHAIN

Sheets; Admin reporting demonstration

DONE WHEN

Report correctly shows 60 view events and 50% defined collaboration across 4 edited docs, with explicit synthetic source, population and limitation notes.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Visitor funnel and experiments



RUNTIME AND BOUNDARY

Use a cohort/time period where stages are comparable. The supplied funnel is explicitly synthetic and simplified for practice.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Contract · Visitor funnel and experiments

Field or control	Scenario value	Interpretation
Product reach	600/1000	60% of landing cohort
Start rate	120/600	20% of product cohort
Completion rate	72/120	60% of starters
Visitor conversion	72/1000	7.2% of landing cohort

WHEN IT MATTERS Completion 60% and visitor conversion 7.2% can both be correct because their denominators differ.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Worked artifact · Visitor funnel and experiments

Synthetic training artifact; inspect fields and expected values.

FUNNEL SEPTEMBER SYNTHETIC
Landing:1000
Product:600
Enquiry starts:120
Submitted:72
largest absolute drop: landing->product 400
form abandonment:48/120=40%
visitor conversion:72/1000=7.2%

Population alignment

Use a cohort/time period where stages are comparable. The supplied funnel is explicitly synthetic and simplified for practice.

Different denominators

Completion 60% and visitor conversion 7.2% can both be correct because their denominators differ.

Instrumentation


Real visitor measurement requires configured analytics and approved data collection. Drive file activity is not a substitute for site visitor sessions.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Decision · Visitor funnel and experiments

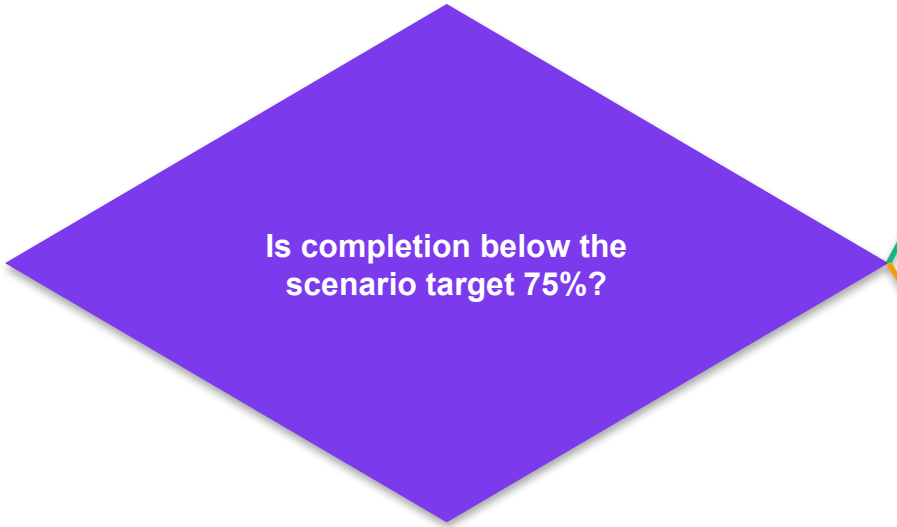

Branch A

YES: test form friction with approved minimal fields

Branch B

NO: examine upstream navigation and qualified outcomes

Real visitor measurement requires configured analytics and approved data collection. Drive file activity is not a substitute for site visitor sessions.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Fault isolation · Visitor funnel and experiments

Observed fault	Mechanism / cause	Corrective check
Conversion 60% shown as visitor rate	Starter denominator mistaken for landing cohort	Label each ratio explicitly
Analytics reports no visitors	Instrumentation not configured/available	Verify actual collection; avoid invented data
Three ideas cannot be tested	No measure or owner	Add threshold, period and accountable owner

WHEN IT MATTERS Improve product navigation, shorten enquiry fields and offer booking. Each idea names friction, owner, metric and an acceptance threshold.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Control ownership · Visitor funnel and experiments

Control point	Responsible actor	Evidence / constraint
Measurement	Website owner	Approved instrumentation and privacy
Data	Analyst	Cohort/time alignment
Experiment	Marketing	One change and declared metric
Decision	Sponsor	Review outcomes and side effects

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Acceptance evidence · Visitor funnel and experiments

Evidence ID	Observed artifact	Acceptance requirement
FUNNEL	Stages	1000/600/120/72
MATH	Conversion	7.2% landing cohort
IDEA1	Navigation	Product reach target>=70%
IDEA2/3	Form/booking	Completion>=75%; availability test

WHEN IT MATTERS Funnel and ratios are correct and labelled synthetic; three ideas name friction, owner, measure, threshold and test period.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Analysis · Visitor funnel and experiments

1

Population alignment

Use a cohort/time period where stages are comparable. The supplied funnel is explicitly synthetic and simplified for practice.

2

Different denominators

Completion 60% and visitor conversion 7.2% can both be correct because their denominators differ.

3

Instrumentation

Real visitor measurement requires configured analytics and approved data collection. Drive file activity is not a substitute for site visitor sessions.

4

Testable ideas

Improve product navigation, shorten enquiry fields and offer booking. Each idea names friction, owner, metric and an acceptance threshold.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY23 · K6 K7 A5 A7

Visitor funnel and experiments

ACTIVITY23 25 minutes · Full procedure in Learner Guide and activities/activity-23-visitor-journey-funnel-and-improvement-tests

Marketing wants three customer-experience improvements. Use a synthetic visitor funnel and test definitions rather than asserting website analytics is automatically available from Drive.

YOU'LL BUILD

Funnel and ratios are correct and labelled synthetic; three ideas name friction, owner, measure, threshold and test period.

TOOLCHAIN

Sheets, Sites

DONE WHEN


Funnel and ratios are correct and labelled synthetic; three ideas name friction, owner, measure, threshold and test period.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY24 · K9 A6

Add-ons scopes and approval

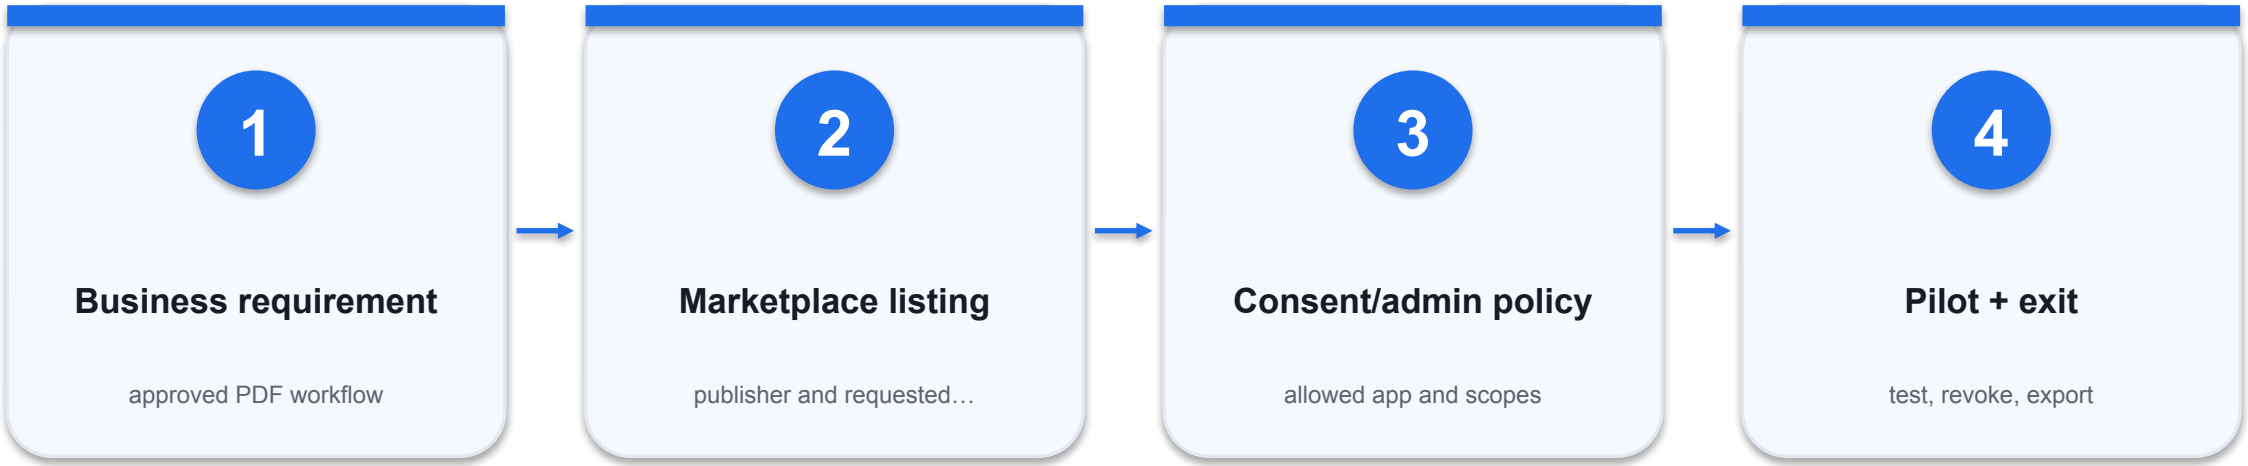

RUNTIME AND BOUNDARY

A requested OAuth permission describes data access, not a quality endorsement. Compare it with the actual business requirement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY24 · K9 A6

Contract · Add-ons scopes and approval

Field or control	Scenario value	Interpretation
Functional fit	Merge approved PDFs	Requirement-specific evidence
Requested access	Files / mail as declared	Review actual consent wording
Admin status	Allowed / blocked / limited	Policy can prevent installation
Exit	Revoke OAuth and uninstall	Separate access and installation review

WHEN IT MATTERS Workspace app availability may be controlled by administrator policy. A learner should submit a recommendation rather than bypass a blocked app.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY24 · K9 A6

Worked artifact · Add-ons scopes and approval

Synthetic training artifact; inspect fields and expected values.

SYNTHETIC EXTENSION REVIEW
Candidate A: PDF utility; files access
Candidate B: mail automation; files+mail access
Need: merge approved brochure PDFs only
Preference: least sufficient data access
Publisher: verify current listing
Data retention: must be documented
Pilot: synthetic non-sensitive files
Exit: export outputs; revoke; uninstall

Scope boundary

A requested OAuth permission describes data access, not a quality endorsement. Compare it with the actual business requirement.

Administrator controls

Workspace app availability may be controlled by administrator policy. A learner should submit a recommendation rather than bypass a blocked app.

Data handling

Review where content is processed, retention, deletion and subcontractors using current publisher evidence. Mark unknowns explicitly.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Decision · Add-ons scopes and approval



Branch A

YES: request approved limited pilot

Branch B

NO: reject or seek lower-access alternative

Review where content is processed, retention, deletion and subcontractors using current publisher evidence. Mark unknowns explicitly.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY24 · K9 A6

Fault isolation · Add-ons scopes and approval

Observed fault	Mechanism / cause	Corrective check
Install blocked	Administrator allowlist/policy	Submit review request; do not bypass
Broad mail scope for PDF task	Permission exceeds requirement	Choose lower-access option or reject
Uninstall assumed revoke	OAuth connection may still require review	Revoke access and confirm installed state

WHEN IT MATTERS Use synthetic files, define output checks, limit the pilot audience and document revocation/uninstallation and output portability.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY24 · K9 A6

Control ownership · Add-ons scopes and approval

Control point	Responsible actor	Evidence / constraint
Requirement	Business owner	Defines output and constraints
Publisher review	Security reviewer	Scopes, handling and evidence
Approval	Administrator	Permits limited pilot
Exit	App owner	Revoke/uninstall/export evidence

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Acceptance evidence · Add-ons scopes and approval

Evidence ID	Observed artifact	Acceptance requirement
FIT	Candidate A	PDF requirement matched
SCOPE	Consent	Actual declared access recorded
PILOT	Mock PDFs	Correct readable merged output
EXIT	Connection/install	Revocation and uninstall procedure

WHEN IT MATTERS One current add-on is evaluated with actual dated listing/access evidence, fit and data handling, administrator approval route, pilot checks and revocation/exit plan.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Add-ons scopes and approval

1

Scope boundary

A requested OAuth permission describes data access, not a quality endorsement. Compare it with the actual business requirement.

2

Administrator controls

Workspace app availability may be controlled by administrator policy. A learner should submit a recommendation rather than bypass a blocked app.

3

Data handling

Review where content is processed, retention, deletion and subcontractors using current publisher evidence. Mark unknowns explicitly.

4

Pilot and rollback

Use synthetic files, define output checks, limit the pilot audience and document revocation/uninstallation and output portability.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY24 · K9 A6

Add-ons scopes and approval

ACTIVITY24 25 minutes · Full procedure in Learner Guide and activities/activity-24-add-on-selection-scopes-and-administrator-controls

An add-on promises PDF merge and customer follow-up, but requests broad file and mail access. Recommend a suitable extension only after fit, permissions, data handling and exit checks.

YOU'LL BUILD

One current add-on is evaluated with actual dated listing/access evidence, fit and data handling, administrator approval route, pilot checks and revocation/exit plan.

TOOLCHAIN

Marketplace, Sheets; administrator review

DONE WHEN


One current add-on is evaluated with actual dated listing/access evidence, fit and data handling, administrator approval route, pilot checks and revocation/exit plan.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY25 · K5 K9 A2 A6

Script and API boundaries

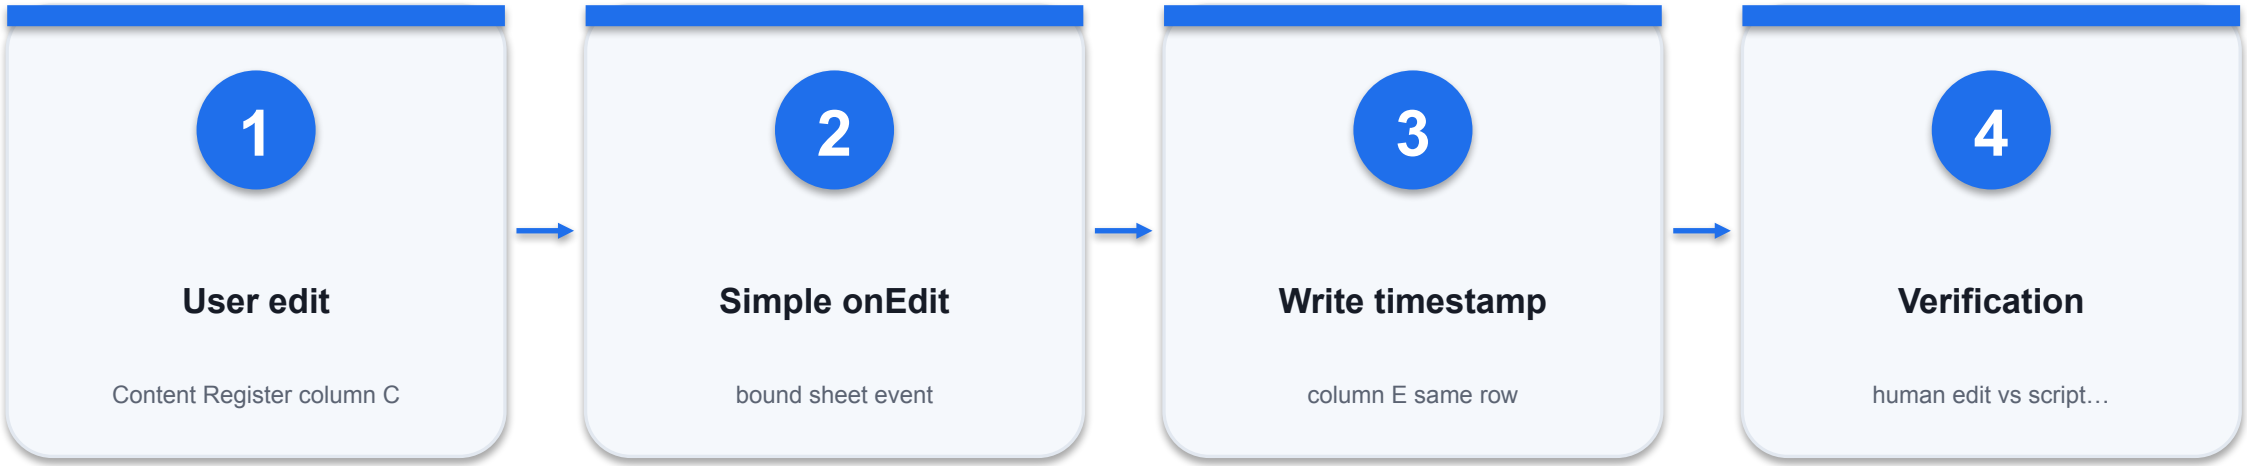

RUNTIME AND BOUNDARY

onEdit receives an event for a user edit; clicking Run manually has no normal edit event, so the guard returns safely.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY25 · K5 K9 A2 A6

Contract · Script and API boundaries

Field or control	Scenario value	Interpretation
Event object	e.range	Exists when user edit fires trigger
Guard	sheet name + column 3 + row>1	Ignore unrelated/header edits
Write	column 5 new Date()	Only bound sheet for simple trigger
Authorization	Simple trigger cannot send mail	Installable runs creator if used

WHEN IT MATTERS Simple triggers cannot call services that require authorisation, such as sending email; their runtime limit is 30 seconds.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY25 · K5 K9 A2 A6

Worked artifact · Script and API boundaries

Synthetic training artifact; inspect fields and expected values.

```
function onEdit(e) {
  if (!e || !e.range) return;
  const r=e.range, s=r.getSheet();
  if (s.getName()!=="Content Register") return;
  if (r.getColumn()!==3 || r.getRow()<2) return;
  if(r.getNumRows()!==1 || r.getNumColumns()!==1)return;
  s.getRange(r.getRow(),5).setValue(new Date());
}
```

Trigger identity

onEdit receives an event for a user edit; clicking Run manually has no normal edit event, so the guard returns safely.

Simple-trigger limit

Simple triggers cannot call services that require authorisation, such as sending email; their runtime limit is 30 seconds.


Programmatic edit

A script/API setValue does not cause onEdit to run. Automation needs explicit timestamp logic or another deliberately designed trigger.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Decision · Script and API boundaries

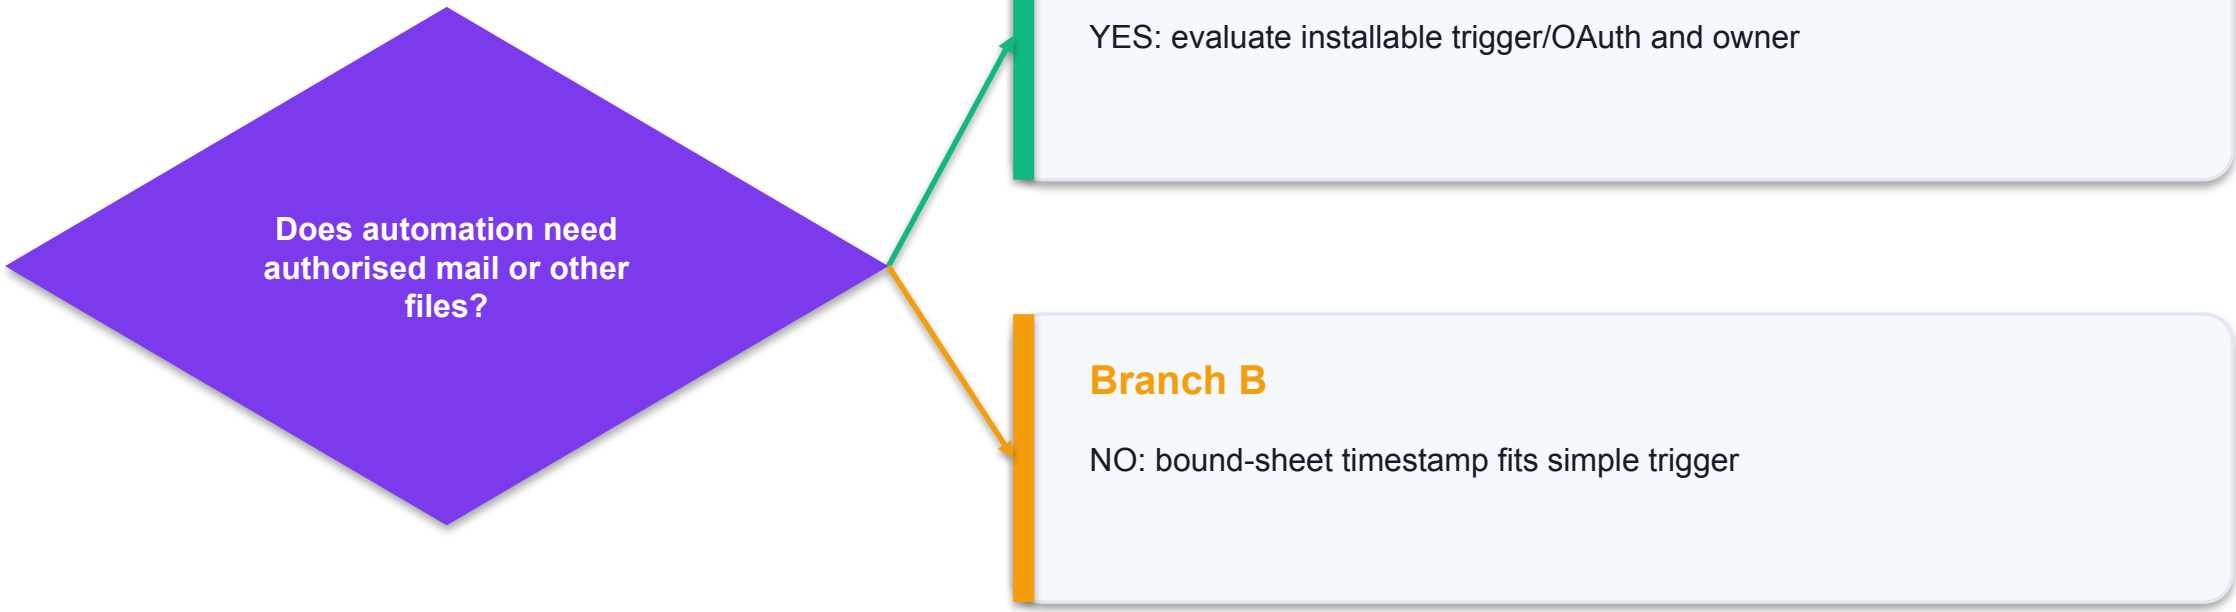

A script/API setValue does not cause onEdit to run. Automation needs explicit timestamp logic or another deliberately designed trigger.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY25 · K5 K9 A2 A6

Fault isolation · Script and API boundaries

Observed fault	Mechanism / cause	Corrective check
Manual Run changes nothing	No edit event object	Edit the training sheet column C
Bulk paste not stamped	Guard excludes multi-cell edits	Use single-cell task or design bulk handling
Script edit not stamped	Programmatic edit does not fire onEdit	Write timestamp explicitly in that automation

WHEN IT MATTERS An installable trigger runs as its creator and requires relevant consent. A REST API client requires its own OAuth/API configuration; do not paste credentials into files.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY25 · K5 K9 A2 A6

Control ownership · Script and API boundaries

Control point	Responsible actor	Evidence / constraint
Code scope	Bound training sheet	OnlyCurrentDoc where applicable
Trigger	Simple onEdit	No mail or external files
Credentials	User	Never embed tokens or passwords
Lifecycle	Automation owner	Review creator account and revoke triggers

WHEN IT MATTERS Controls are applied at the actual owning surface. Written policy alone is not enforcement.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY25 · K5 K9 A2 A6

Acceptance evidence · Script and API boundaries

Evidence ID	Observed artifact	Acceptance requirement
EDIT	Row 2 column C	Timestamp appears in E2
HEADER	Row 1	No timestamp change
OTHER	Different column	No timestamp change
SCRIPT	Programmatic setValue	No implicit onEdit event

WHEN IT MATTERS User edit C2 creates E2 timestamp; header/unrelated edits are ignored; report correctly states simple-trigger auth/runtime and programmatic-edit boundaries.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Analysis · Script and API boundaries

1

Trigger identity

onEdit receives an event for a user edit; clicking Run manually has no normal edit event, so the guard returns safely.

2

Simple-trigger limit

Simple triggers cannot call services that require authorisation, such as sending email; their runtime limit is 30 seconds.

3

Programmatic edit

A script/API setValue does not cause onEdit to run. Automation needs explicit timestamp logic or another deliberately designed trigger.

4

Integration boundary

An installable trigger runs as its creator and requires relevant consent. A REST API client requires its own OAuth/API configuration; do not paste credentials into files.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY25 · K5 K9 A2 A6

Script and API boundaries

ACTIVITY25 30 minutes · Full procedure in Learner Guide and activities/activity-25-apps-script-and-api-integration-contract

The SME wants update timestamps on a content register and considers automated email. A safe bound-sheet example exposes the simple-trigger boundary before evaluating authorised integration.

YOU'LL BUILD

User edit C2 creates E2 timestamp; header/unrelated edits are ignored; report correctly states simple-trigger auth/runtime and programmatic-edit boundaries.

TOOLCHAIN

Sheets, Apps Script; optional developer extension

DONE WHEN

User edit C2 creates E2 timestamp; header/unrelated edits are ignored; report correctly states simple-trigger auth/runtime and programmatic-edit boundaries.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY01

Domain verification and mail routing

Worked supplementary contract; detailed procedure remains in the Learner Guide.

DOMAIN SETUP CHANGE RECORD
domain: harbour.example (fictional)
TXT proof: Google-provided verification token
MX purpose: route inbound mail to Google
MX target: use current Setup Wizard record
new standard setup: smtp.google.com
verification status: separate from mail flow
evidence: verified domain + received test mail

Separate mechanisms

Domain verification proves control of the domain. MX records route inbound email; one does not substitute for the other.

DNS owner

Only the authorised DNS administrator changes domain records. Use the exact current Google setup instructions for the tenant.

Mail cutover

Preserve the current routing design until the approved migration cutover. Mixed old/new records require deliberate review.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY01

User alias group and access contract

Worked supplementary contract; detailed procedure remains in the Learner Guide.

IDENTITY SCHEMA
user: individual Google Account with sign-in
alias: alternate address for existing account
group: membership-based mail/access audience
licence: product/service entitlement
status: active/suspended lifecycle
asset owner: individual or organisation
review: account, group, direct grants

User

A user account has a sign-in identity and service entitlements; do not treat an alias as a separately licensed login.

Alias

An alternate address can receive mail for its underlying account, but is not an independent delegated mailbox.

Group

Membership grants audience-based access; offboarding must review groups as well as direct file permissions.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY01

Suspension handover and deletion gate

Worked supplementary contract; detailed procedure remains in the Learner Guide.

OFFBOARDING CHANGE REQUEST
identity: departing Marketing editor
containment: approved suspension
inventory: My Drive files andownership
handover: transfer eligible business assets
shared drive: organisation content remains
delegation/group grants: review separately
deletion: only after approved retention/handover

Suspension

Suspension restricts account access while retaining the account's data; it is not the same as deletion or ownership handover.

Handover

Inventory individually owned assets and verify transfer using the actual administrator workflow before approving deletion.

Independent grants

Remove obsolete delegation and group membership explicitly. The lifecycle request lists each surface and its responsible owner.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY01

Service availability and account security controls

Worked supplementary contract; detailed procedure remains in the Learner Guide.

ADMINISTRATOR CONTROL REQUEST
OU/group: Marketing training cohort
service: Sites enabled only if approved
app policy: allowed Marketplace utilities
2-Step Verification: enrolment and policy review
licence: required edition capability
external sharing: approved audience boundary
evidence: actual policy + test identity outcome

Policy surface

Service availability, app approval and sharing are different settings. Identify the actual policy surface and cohort.

Security

2-Step Verification changes sign-in controls; it does not by itself restrict an already shared public file.

Availability

A missing feature may be licence, role or administrator policy. Record which evidence would distinguish these causes.

Primary source: knowledge.workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY21

Workspace content tools and boundaries

Worked supplementary contract; detailed procedure remains in the Learner Guide.

CONTENT NEED -> WORKSPACE OFFERING
Drive: store and share controlled assets
Docs: structured text and reviewed edits
Sheets: typed registers, formulas and charts
Slides: approved visual presentation
Forms: published collection and responses
Sites: site pages andembedded assets
Gmail: mail routing andcustomer reply

Content assets

Drive stores assets; Docs, Sheets andSlides author distinct artifact types. Use the appropriate source of record.

Collection

Forms publishes questions and stores responses; its responder audience differs from the response-sheet audience.

Web property

Sites assembles pages and embeds, but does not automatically broaden access to embedded files.

Primary source: workspace.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Communication and optional extension selection

Worked supplementary contract; detailed procedure remains in the Learner Guide.

WORKFLOW NEED -> OFFERING
Calendar: availability and event invitations
Meet: hosted meeting and screen-share
Chat: persistent team space and discussion
Tasks: owned follow-up work where available
Apps Script: bound or authorised automation
REST APIs: OAuth-enabled client integration
Marketplace: add-on with publisher/scope review

Persistent record

Meeting/chat communication links to controlled source assets; it does not replace document ownership or publication review.

Optional capabilities

Edition/admin policy can limit booking, recording or app installation. Core exercise fallbacks are documented.

Integration

Apps Script identity and OAuth clients have explicit permission contracts; do not assume every extension runs with the same identity.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY18

Retired applications and current replacements

Worked supplementary contract; detailed procedure remains in the Learner Guide.

LEGACY UPDATE RECORD
Jamboard app: end of life 31 December 2024
Core brainstorm: shared Slides board
Currents: unavailable from 5 July 2023
Core community: Google Chat spaces
Duet AI: now Gemini for Google Workspace
AI availability: current account/admin check
AI output: source-check before publication

Jamboard

The original brainstorm learning purpose remains; procedures use a current shared Slides board instead of retired Jamboard.

Currents

Replace legacy Currents community links with a current Chat-space design and review the audience/file boundaries.

Gemini name

Duet AI for Workspace is now Gemini for Workspace. Do not preserve retired labels as current controls or assume every AI capability is enabled.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Meet Companion mode and echo prevention

Worked supplementary contract; detailed procedure remains in the Learner Guide.

HYBRID MEETING TOPOLOGY
meeting room hardware: room audio/video
laptop Companion Mode: second screen
laptop microphone: off
meetingaudio on laptop: off
participation: chat/presentation features
speaker/listen route: room hardware
acceptance: no feedback +intended content

Audio boundary

Companion Mode disables the laptop microphone and meeting audio to avoid echo while using room audio.

Second screen

The laptop can participate in supported collaboration surfaces while room hardware carries the conversation.

Availability

Supported features and devices vary. Verify the actual current account and device surface in the trainer demonstration.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Relative absolute and named references

Worked supplementary contract; detailed procedure remains in the Learner Guide.

Formula Checks!H1 tax rate 0.09
Formula Checks!D2 net value 120; D3 net value 240
=D2*(1+$H$1) ->130.8
Fill down: D3 changes; H1 stays fixed
Tax_Rate refers to 'Formula Checks'!$H$1
=D2*(1+Tax_Rate) ->130.8
Relative D2 moves when filled
Absolute $H$1 anchors the rate

Relative

A relative input reference follows the row when copied; an unanchored rate reference can drift into blank cells.

Absolute

Dollar markers lock column and row. Inspect the filled formula rather than checking only the first result.

Named range

Tax_Rate gives the rate a business meaning but still needs an accurately defined source range.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Rounding and conditional averages

Worked supplementary contract; detailed procedure remains in the Learner Guide.

Clean!D2: D13 contains 12 amounts
=ROUND(2820/12,2) ->235.00
=AVERAGE(Clean!D2:D13) ->235
=AVERAGEIF(Clean!C2:C13,"Won",Clean!D2:D13)
Won amounts:360,180,420
Won average:960/3=320
display 2 decimals is not data rounding
round at defined business stage

Conditional mean

AVERAGEIF uses the qualifying stage cohort and corresponding amount range; all-enquiry mean 235 differs from Won mean 320.

Rounding

ROUND changes the computed value at a specified precision. Formatting only controls how the number is displayed.

Precision policy

Specify when to round: per line or after aggregation. Different rounding sequences can produce different financial totals.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Extremes ranking and ties

Worked supplementary contract; detailed procedure remains in the Learner Guide.

Validated amounts:120,240,360,180,90,150,300,420,60,200,500,200
=LARGE(Clean!D2:D13,2) ->420
=SMALL(Clean!D2:D13,2) ->90
=RANK(420,Clean!D2:D13,0) ->2
maximum 500; minimum 60
values 200 and 200 form a tie
top n is not the same as unique top values
rank ties need explicit business rule

Nth value

LARGE returns the nth largest value; SMALL returns the nth smallest. Repeated values participate in the order.

Rank order

RANK with 0 ranks descending; verify the chosen order and population before interpreting a league table.

Ties

Equal values can share a rank. State the tie-handling rule rather than implying a unique winner.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY09

Conditional minimum maximum and no matches

Worked supplementary contract; detailed procedure remains in the Learner Guide.

Won cohort:360,180,420
=MINIFS(Clean!D2:D13,Clean!C2:C13,"Won") ->180
=MAXIFS(Clean!D2:D13,Clean!C2:C13,"Won") ->420
criteria range and value range must match size
test cohort Absent has 0 matches
MINIFS withno match returns 0
precheck COUNTIF forNo data
zero must not be mistaken forreal minimum

Conditional extrema

The minimum and maximum apply only to the matching Won cohort, not to all enquiry amounts.

Range contract

All value and criterion ranges need equal dimensions; misalignment is a contract defect.

No matches

MINIFS returns 0 when no criterion matches; check count before presenting 0 as a real business minimum.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Exact match lookup and source identity

Worked supplementary contract; detailed procedure remains in the Learner Guide.

Products!A2: C4: ID, name, price
P101, Desk lamp,49
P102, Storage box,29
P103, Wall shelf,79
=VLOOKUP("P102",Products!$A$2:$C$4,3,FALSE) ->29
first column must contain search key
FALSE requests exact match
missing P999 ->#N/A; review source

Lookup contract

The search key must be in the first column of the range; column index 3 returns price from this three-column range.

Exact match

FALSE requests exact matching. Omitting this argument defaults to approximate mode and can yield an inappropriate result.

Stable range

Anchor the lookup range before filling rows so each enquiry searches the same approved product source.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

SUPPLEMENT · ACTIVITY10

Slicers filters and formula visibility

Worked supplementary contract; detailed procedure remains in the Learner Guide.

SOURCE: Clean enquirytable
basicfilter: shared table view
filterview: saved independent view
slicer: controls matching charts/pivots
formula SUM overrange: own computation
slicer does not inherently rewrite formulas
verifychartsource andselected stage
unfiltered counts 4,3,3,2

Different surfaces

Basic filters, filter views and slicers change different presentation/analysis surfaces; choose based on collaboration need.

Slicer boundary

A slicer can filter charts/pivot tables sharing the intended dataset. Do not assume a normal SUM formula changes with the slicer.

Source contract


Charts and pivots must point to the expected data range and measure. Verify the filtered output with raw matching rows.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY10

Validated enquiry stage counts

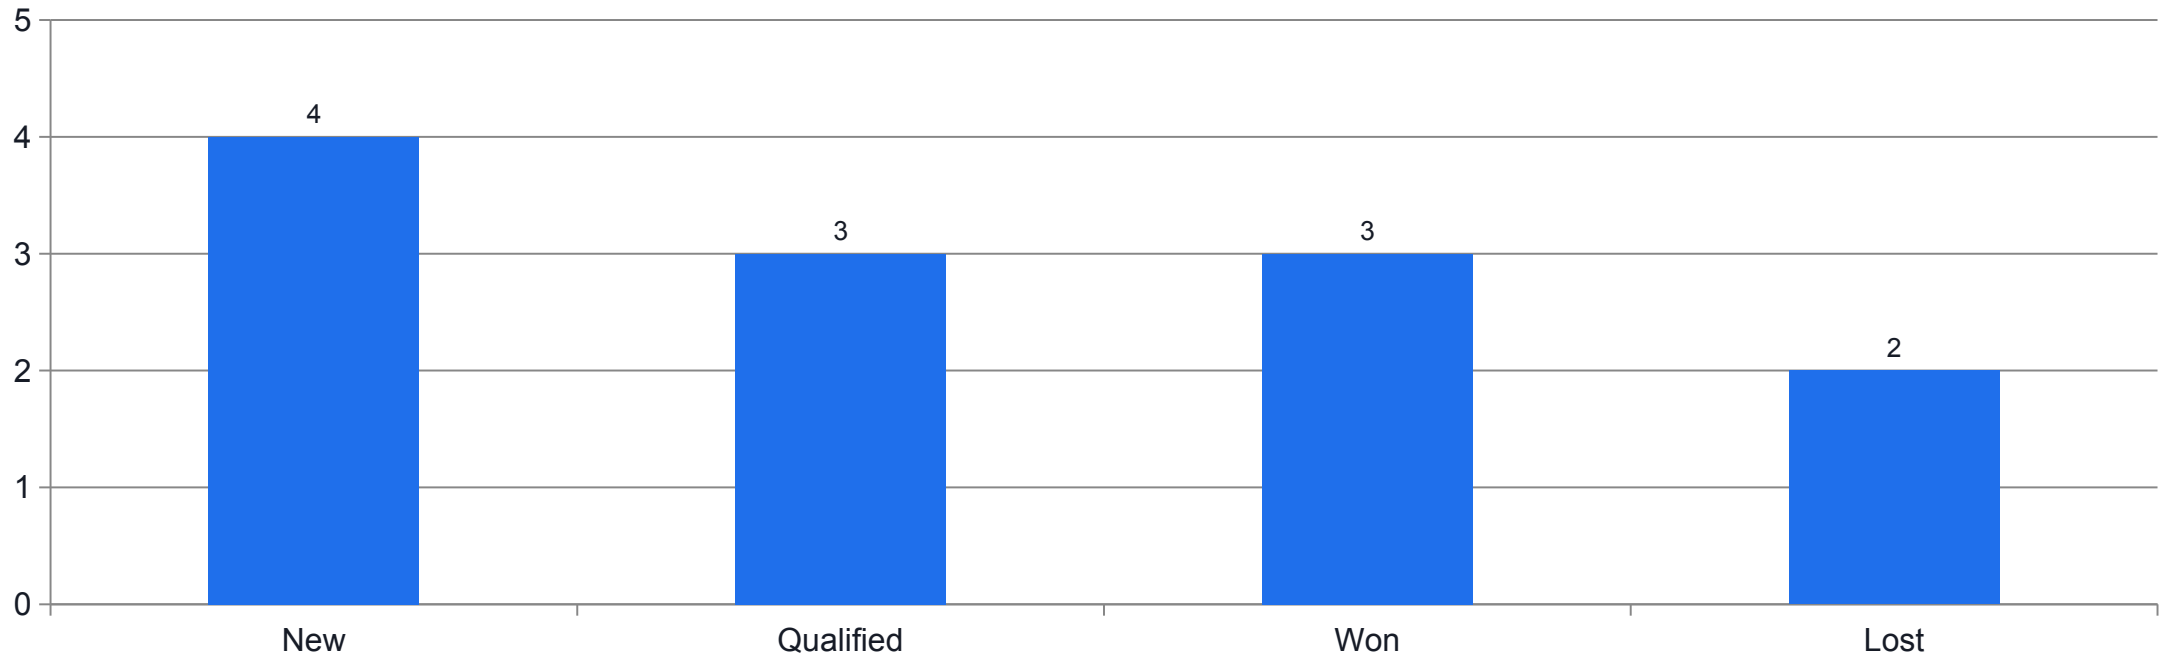

WHAT THE DATA SHOWS


Counts total 12; Won 3 of 12=25%. Cohort: synthetic September enquiries.

Primary source: developers.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY09

Enquiry pipeline and won value

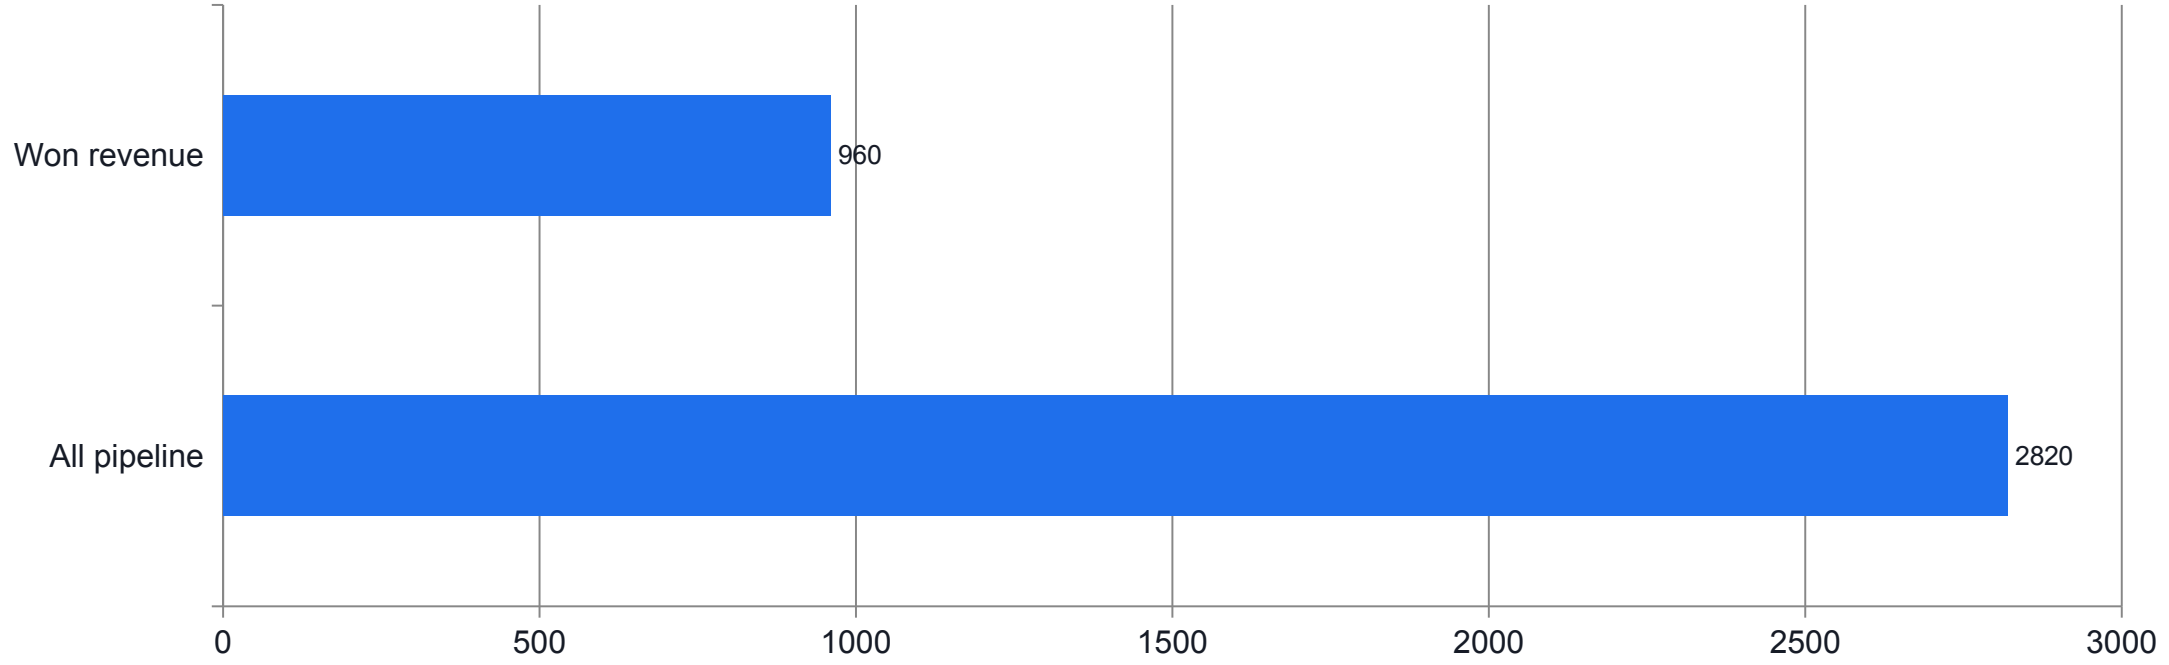

WHAT THE DATA SHOWS


Won revenue SGD 960 is 360+180+420. Currency value differs from enquiry count.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY13

Feedback rating distribution

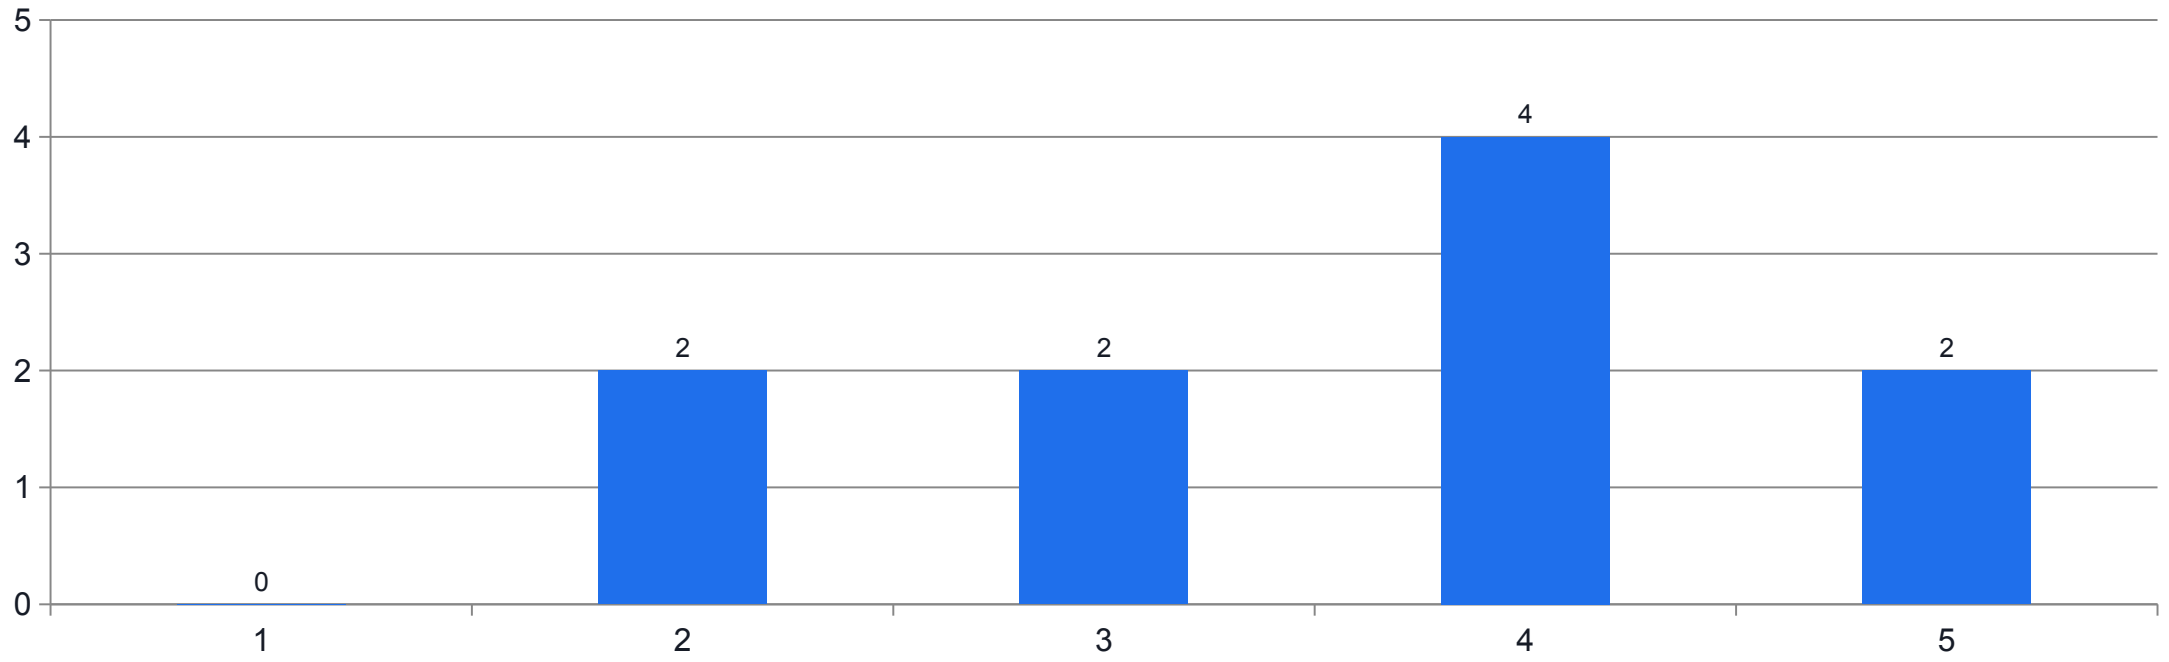

WHAT THE DATA SHOWS


Ten synthetic ratings sum 36; mean 3.6. Six ratings 4 or 5 give 60% positive share.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY21

CMS weighted selection scores

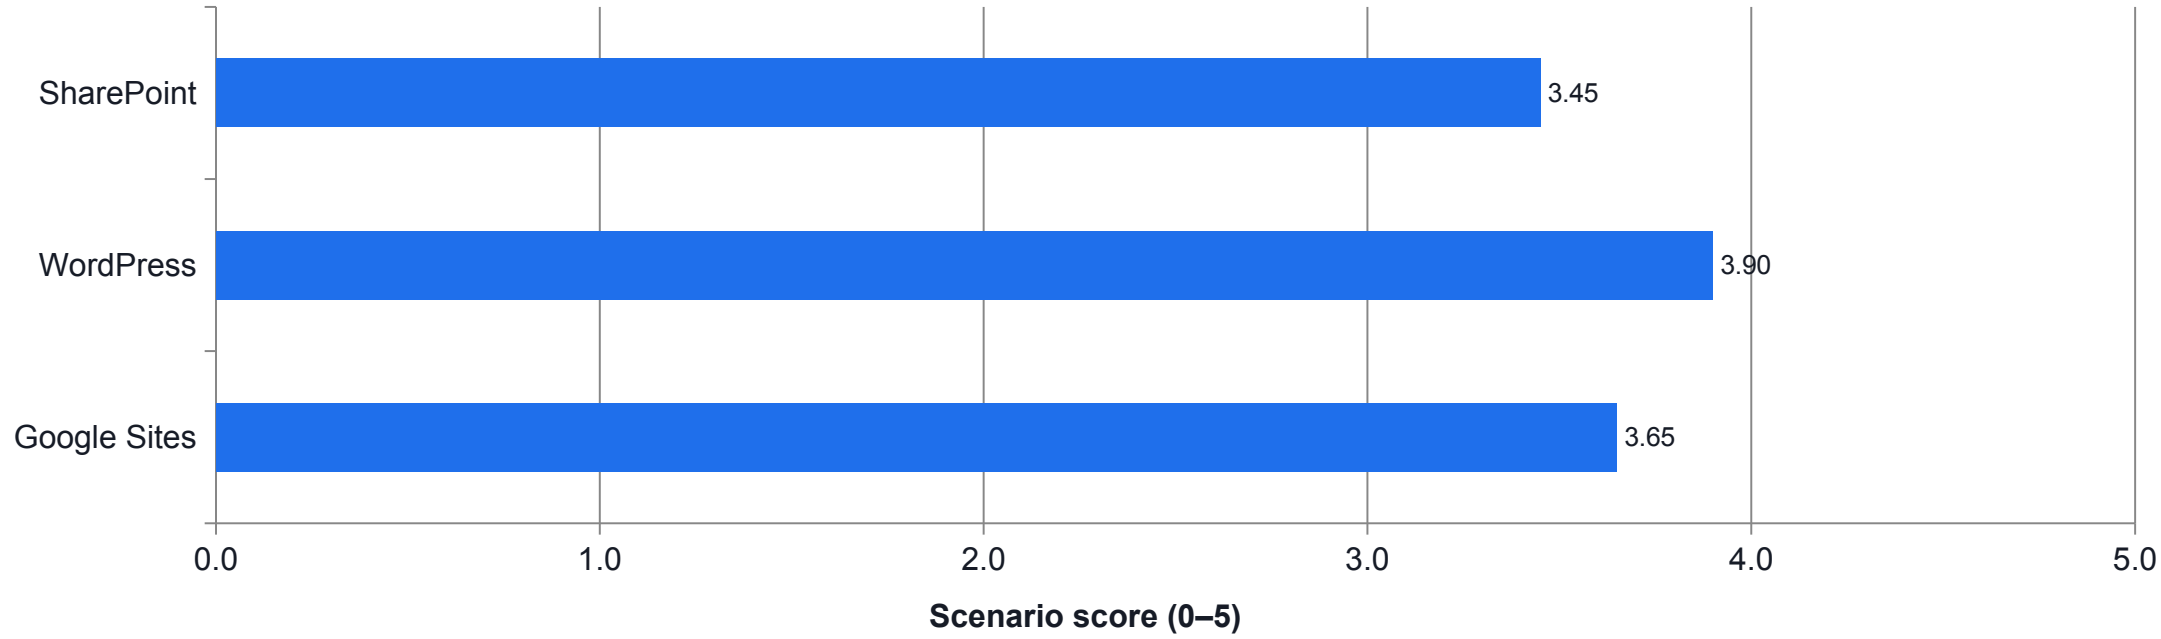

WHAT THE DATA SHOWS


Fictional scores using weights 30/25/25/20; apply mandatory requirements before rank.

Primary source: wordpress.org · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY22

Document view events

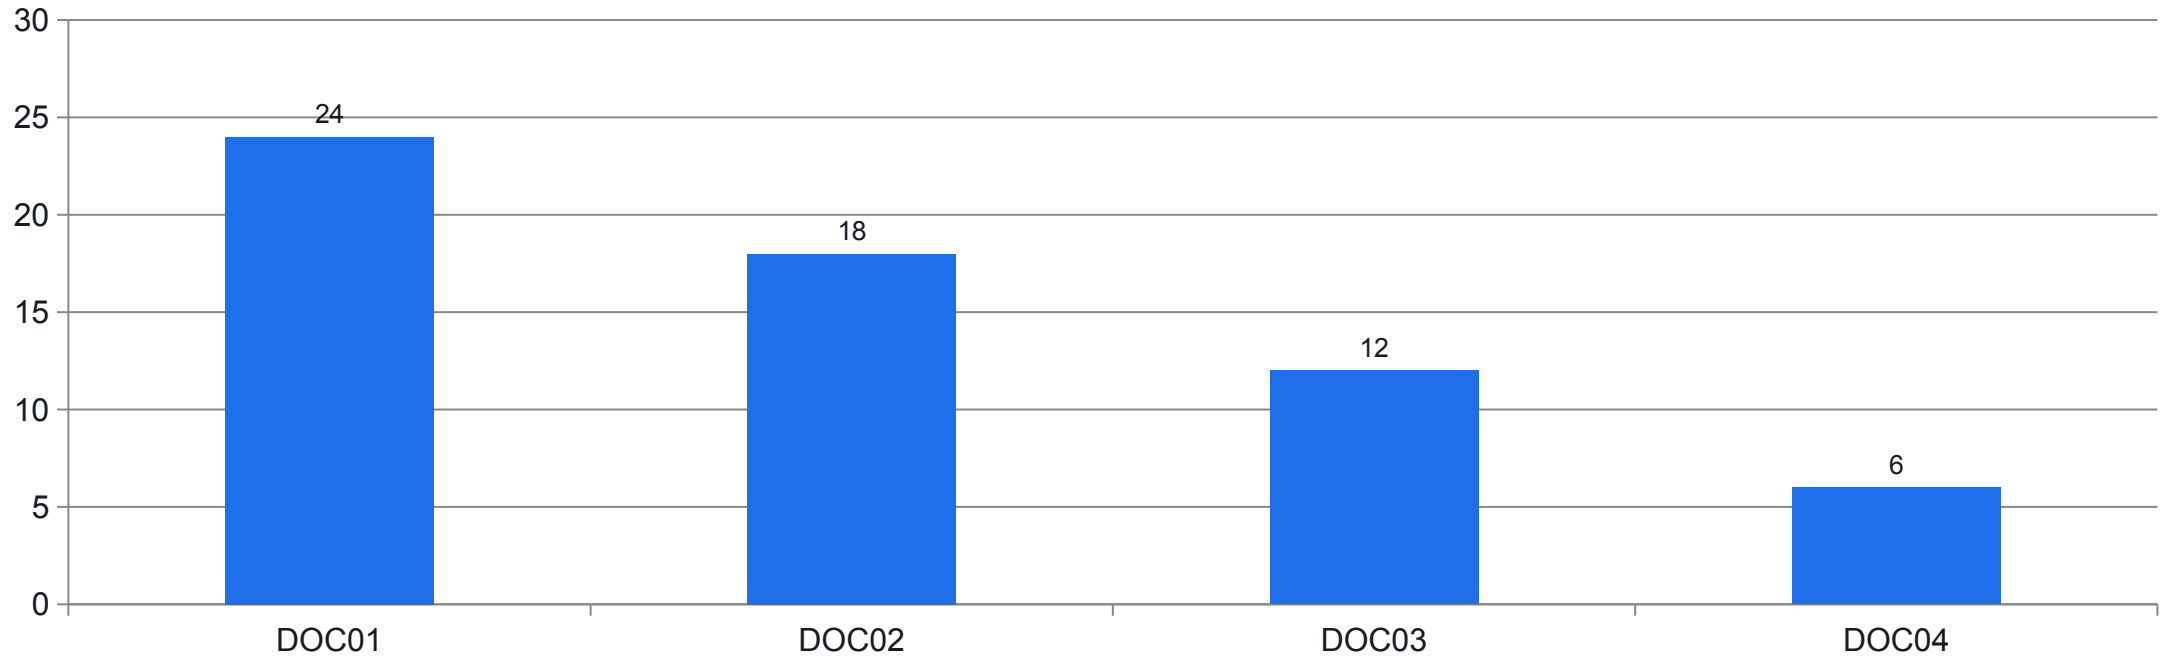

WHAT THE DATA SHOWS


60 synthetic view events; repeated events are not unique viewers or customers.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY22

Distinct editors per document

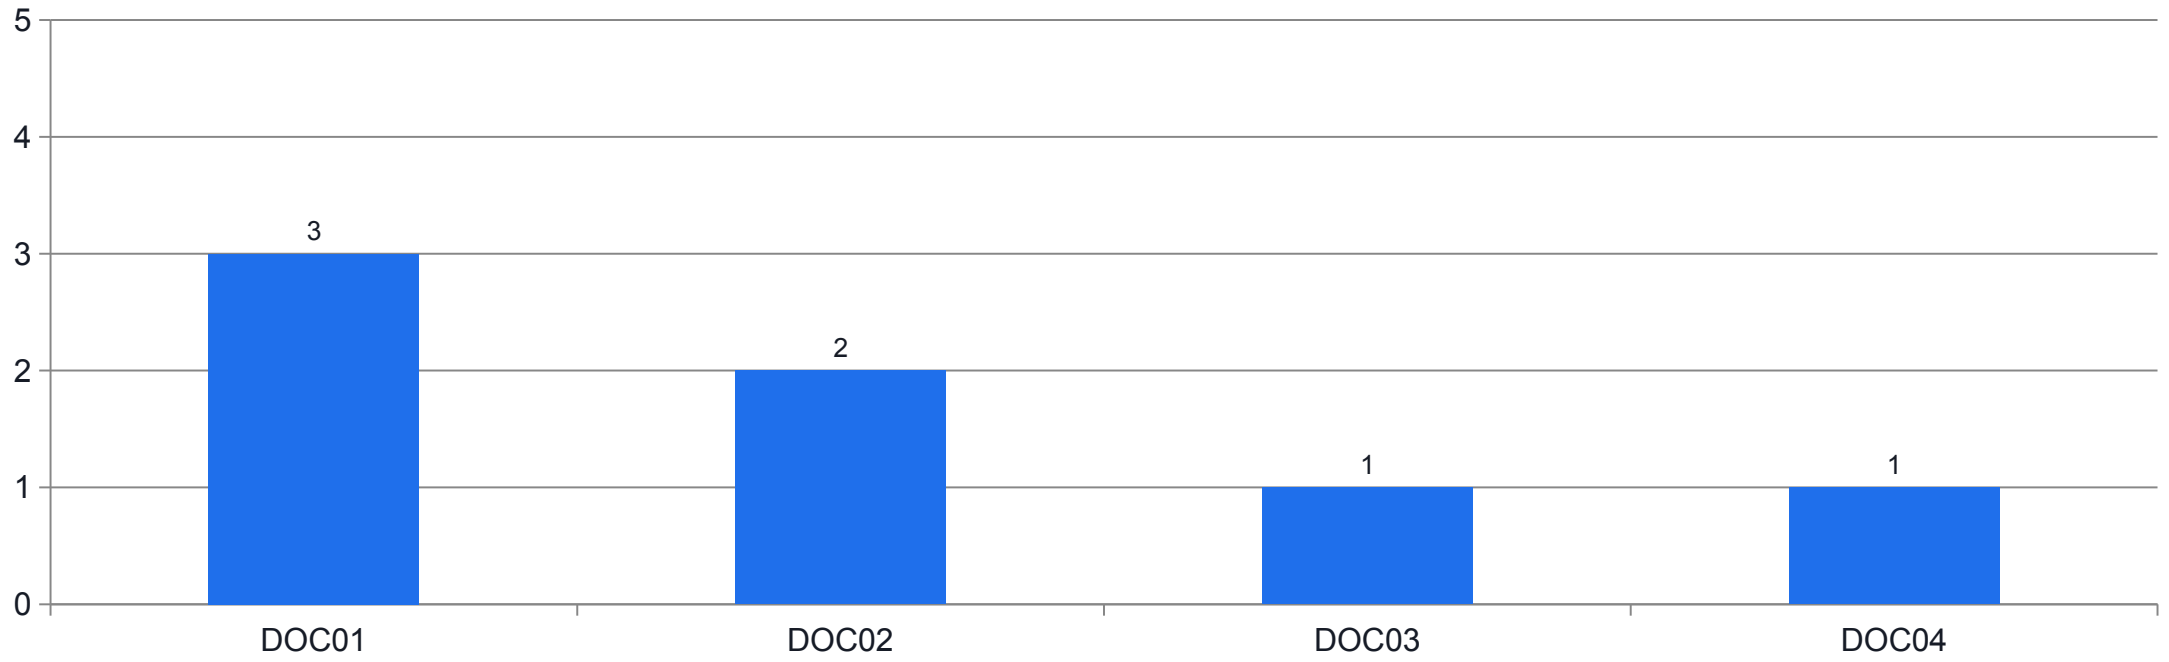

WHAT THE DATA SHOWS


Documents with>=2 editors:2 of 4 edited docs=50% business-defined collaboration rate.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY23

Synthetic visitor journey funnel

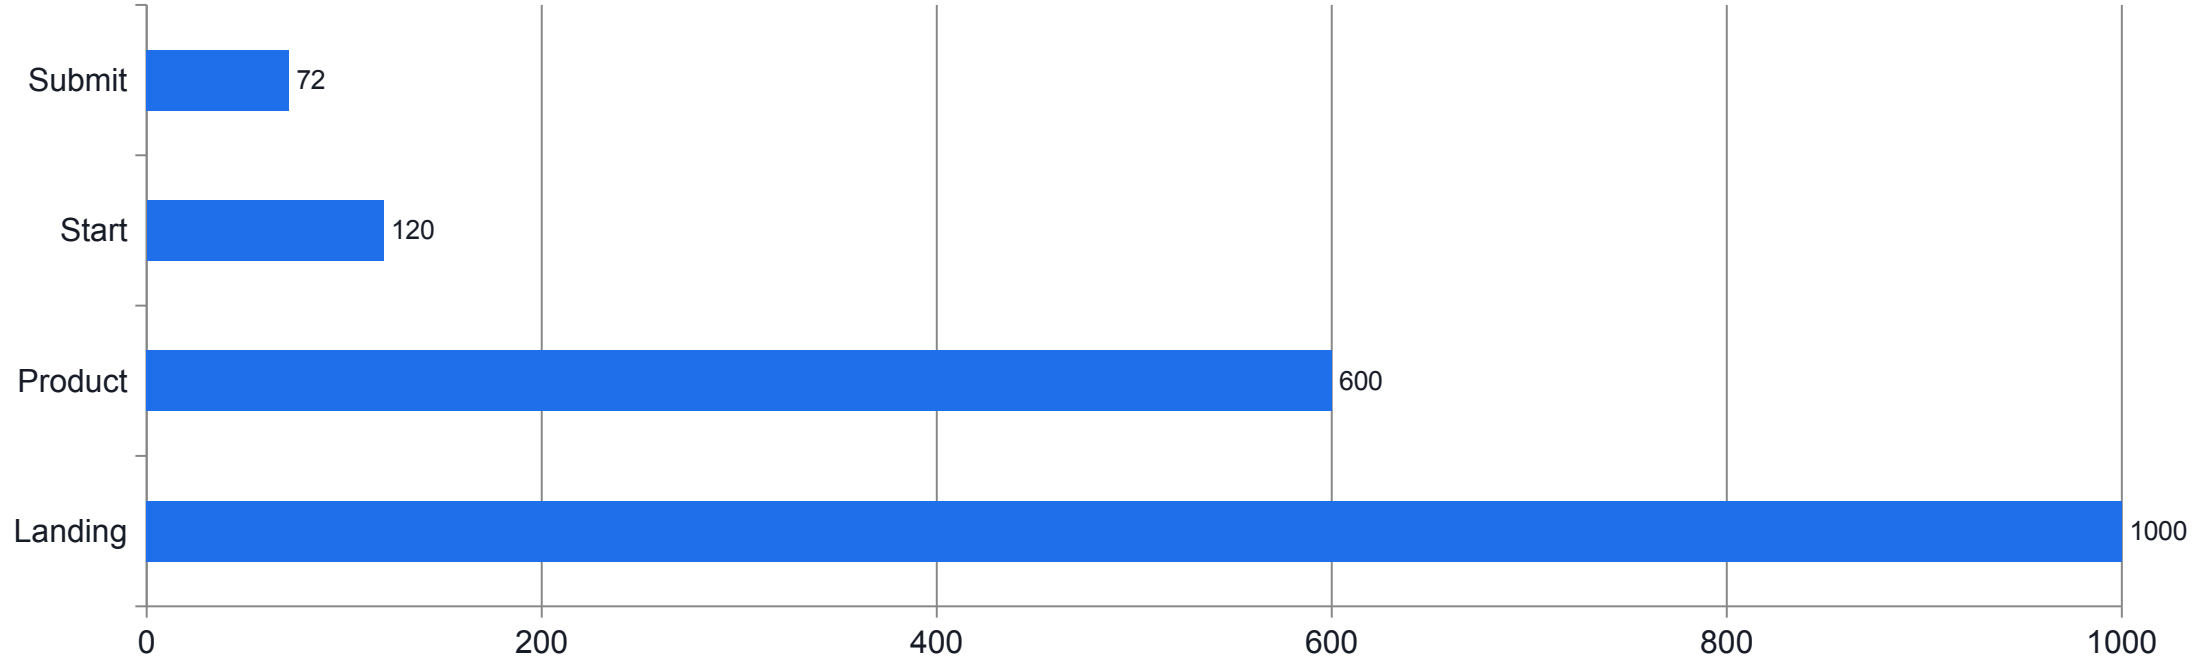

WHAT THE DATA SHOWS


Completion 72/120=60%; visitor conversion 72/1000=7.2%. Denominators differ.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

EDITABLE NATIVE CHART · ACTIVITY22

Document weekly access trend

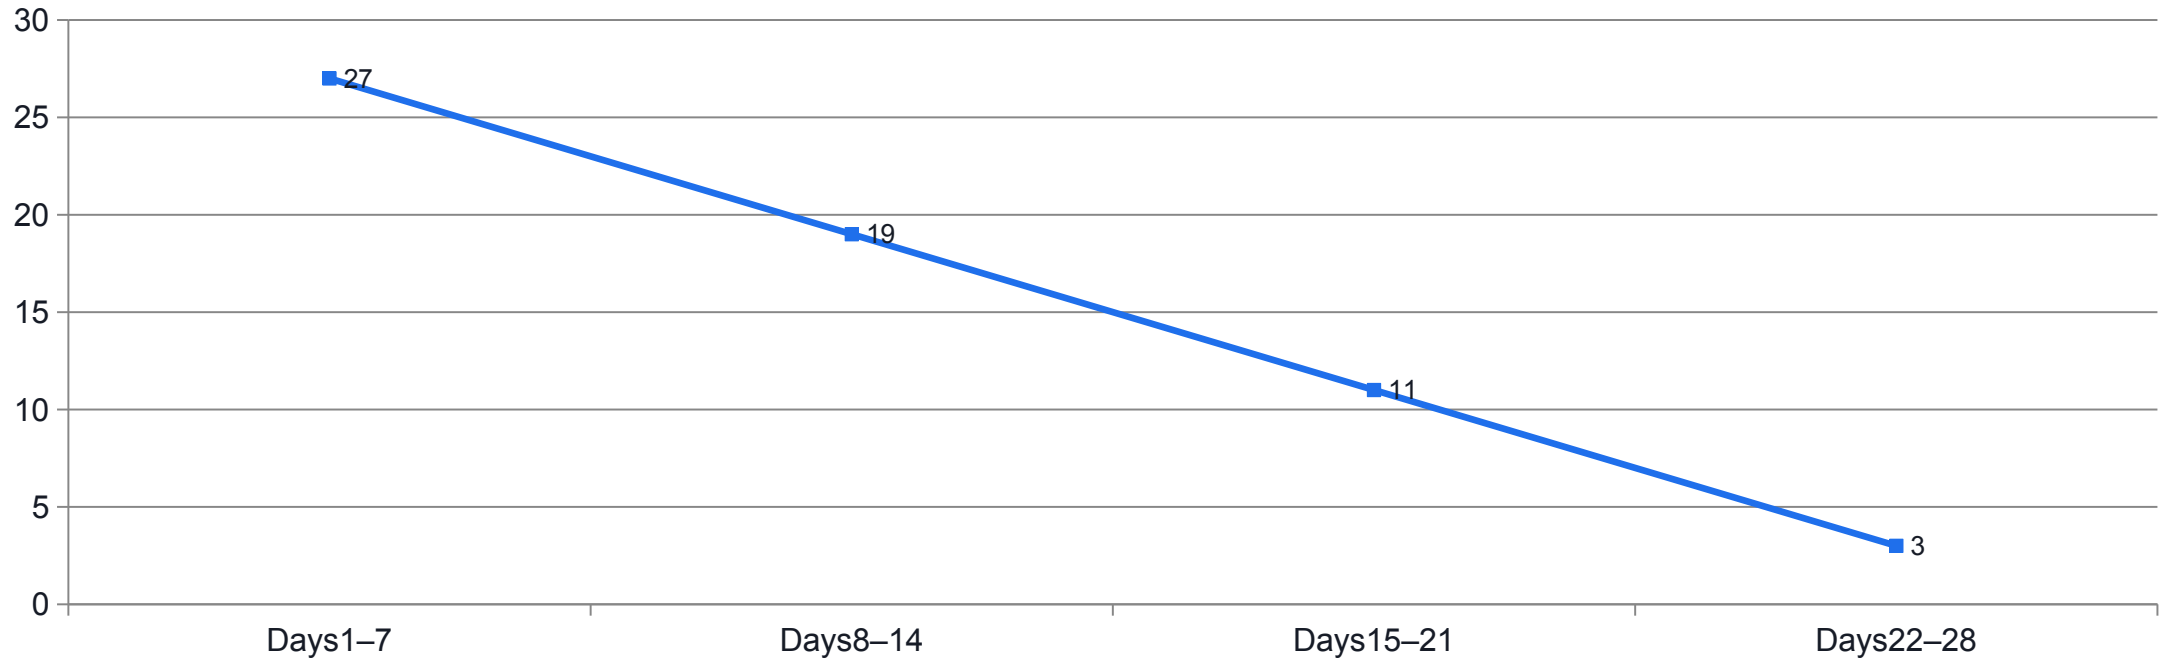

WHAT THE DATA SHOWS

Raw event aggregation by days 1–7/8–14/15–21/22–28 gives 27/19/11/3, total 60; temporal order supports a line.

Primary source: support.google.com · verified 13 Sep 2026 · full link in notes

© Tertiary Infotech Academy Pte Ltd

Practice Exam Availability

1

Current catalog

https://exams.tertiaryinfotech.com/practice-exams?q=Google%20 Workspace

2

Verified 13 September 2026

No matching Google Workspace practice-exam bundle was available.

3

Class preparation

Use the aligned Activity evidence and current course revision materials.

4

Formal assessment

WA9 questions/60 minutes and PP3 tasks/90 minutes remain the assessed instruments.

© Tertiary Infotech Academy Pte Ltd

Practical Evidence Bridge

Original task	Class evidence	Abilities
Task 1	Activities 1,3,4: policy and update lifecycle	A1, A2
Task 2	Activities 19,20,21: maintenance and 2-offering comparison	A3, A4
Task 3	Activities 22,23,24: metrics, add-on review,3 ideas	A5, A6, A7

© Tertiary Infotech Academy Pte Ltd

Assessment

1

Written Assessment

9 questions K1–K9;60 minutes; individual open-book.

2

Practical Performance

3 tasks A1–A7;90 minutes; individual open-book.

3

Submit

Complete the provided documents and upload on the current LMS.

4


Assessor decision

Competent / Not Yet Competent based on sufficient criterion evidence.

© Tertiary Infotech Academy Pte Ltd

FINAL ASSESSMENT

Assessment Flow

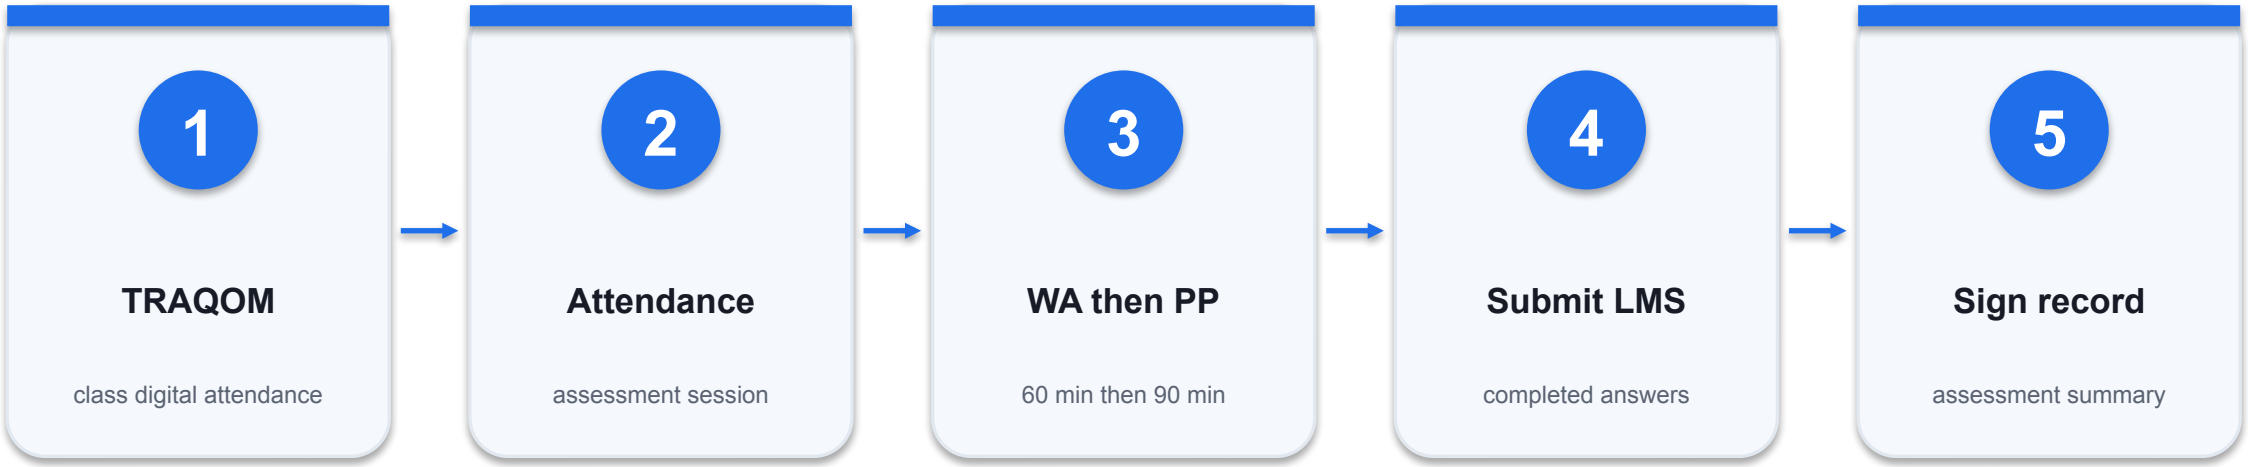

COMPLETION

Follow the current class submission and summary-record process.

© Tertiary Infotech Academy Pte Ltd

Digital Attendance Mandatory

1

TRAQOM · SSG

Complete required digital attendance.

2

Assessment attendance

Confirm recorded assessment session.

3

LMS submission

Check upload of completed responses.

4

Summary record

Sign the Assessment Summary Record as instructed.

© Tertiary Infotech Academy Pte Ltd

TERTIARY INFOTECH ACADEMY

Thank You

enquiry@tertiaryinfotech.com ·+65 6100 0613 ·www.tertiarycourses.com.sg

© Tertiary Infotech Academy Pte Ltd